JANUARY · 1951

S

A McGRAW-HILL PUBLICATION

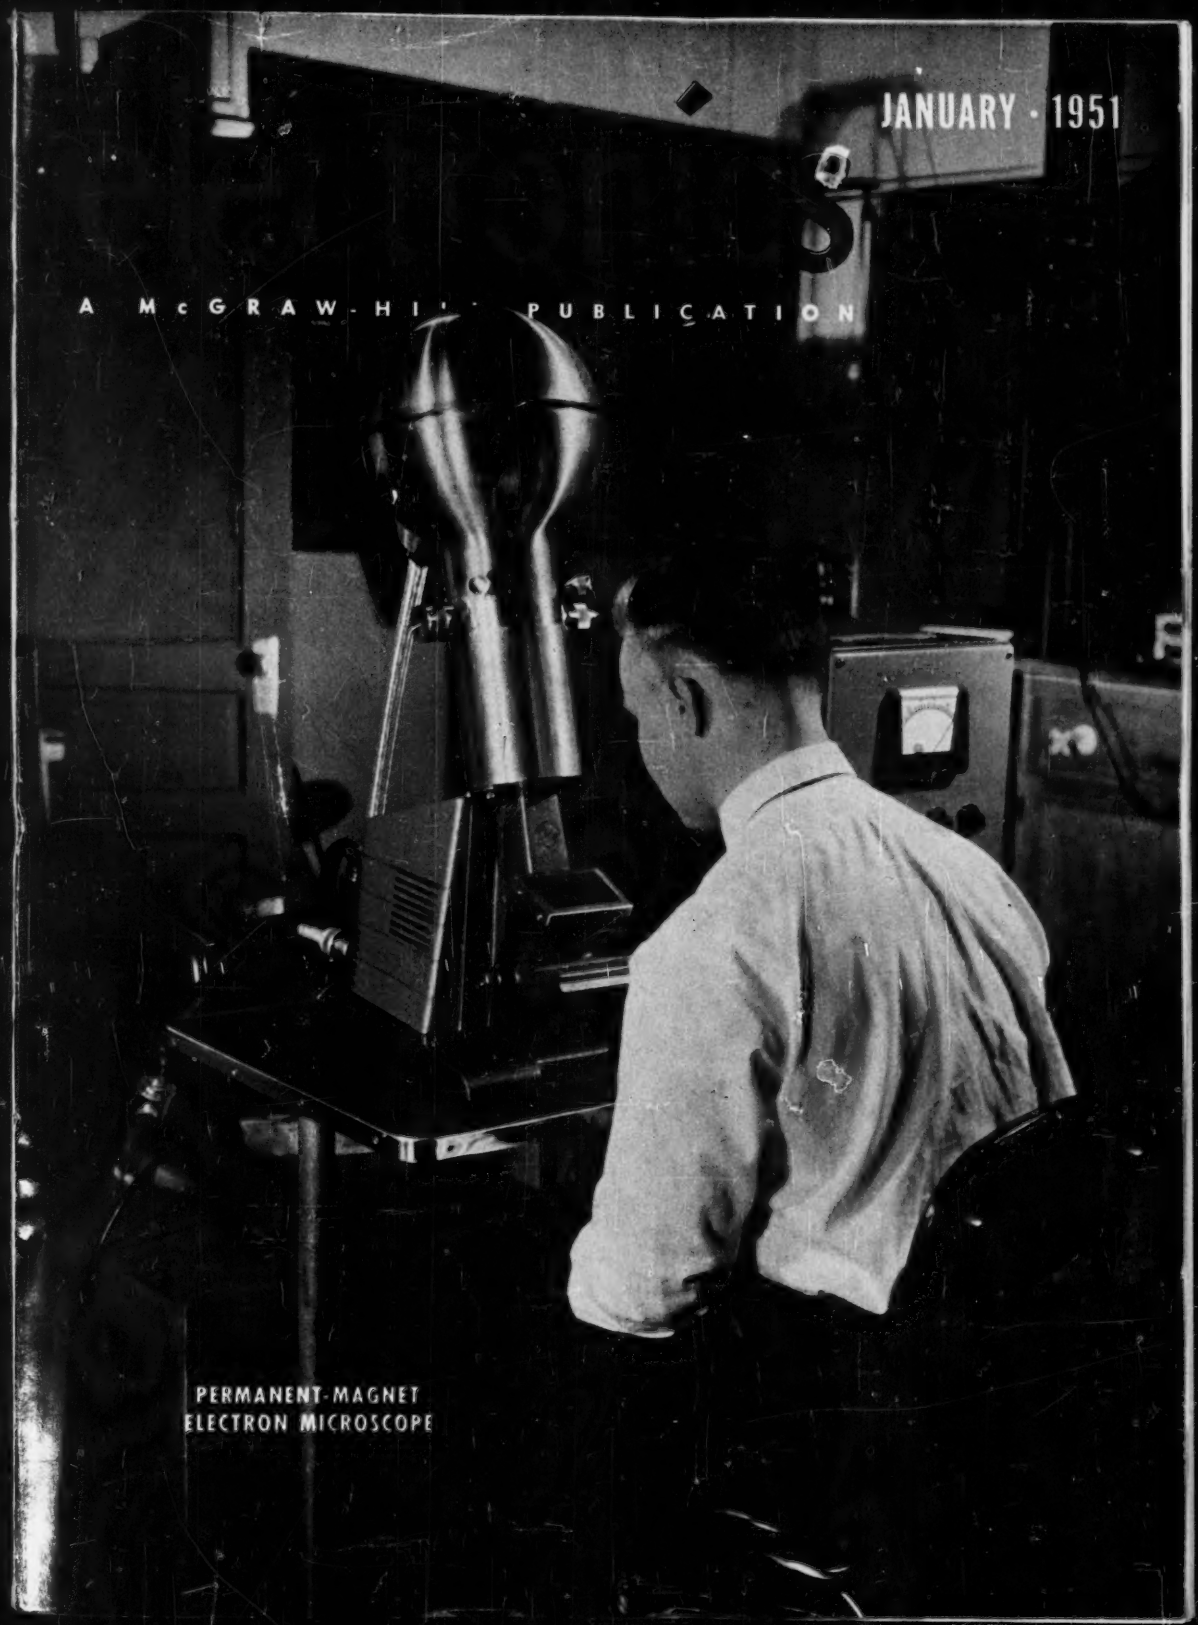

PERMANENT-MAGNET
ELECTRON MICROSCOPE

UTC for Military Components

UTC was the largest supplier of transformer components in World War II. Present UTC production is on a similar basis. Illustrated below are a few of the thousand military types in UTC 1950 production.

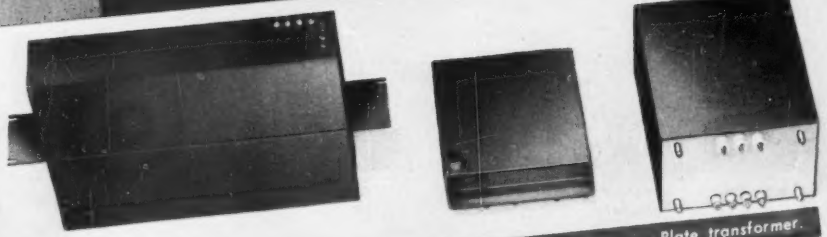

Carrier frequency filter.....Aircraft low frequency filter.....Plate transformer.

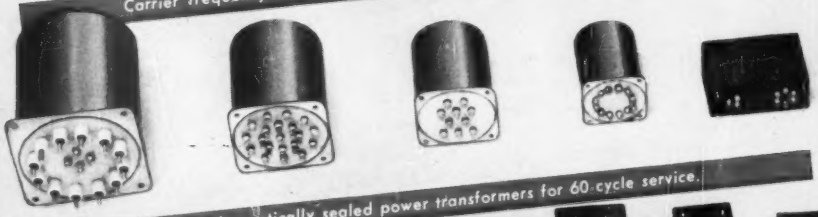

Typical hermetically sealed power transformers for 60-cycle service.

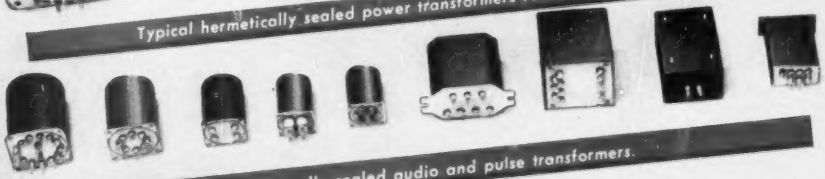

Hermetically sealed audio and pulse transformers.

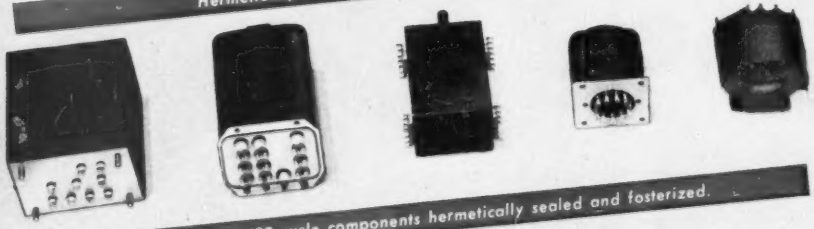

60 cycle and 400 cycle components hermetically sealed and fosterized.

Miniaturized audio units, magnetic amplifiers, etc.

United Transformer Co.

150 VARICK STREET • NEW YORK 13, N. Y.

EXPORT DIVISION: 13 EAST 40th STREET, NEW YORK 16, N. Y. CABLES: "ARLAB"

electronics

A McGRAW - HILL PUBLICATION

JANUARY • 1951

PERMANENT-MAGNET ELECTRON MICROSCOPE ..... COVER
Latest RCA design achieves extreme compactness, lower cost and simpler operation (see p 86)

MILLIMETER WAVES, by J. R. Pierce 66
Urges engineers to produce techniques for generating radiations in this frequency range

GAS-DIODE ELECTRONIC ORGAN, by Robert M. Strassner 70
Chains of sawtooth tone generators using 10-cent lamps form basis of new 5-octave instrument

SIGNAL STRENGTH ANALYZER, by Ralph W. George 75
Measures total time a signal is above each of twelve step values

COLOR FUNDAMENTALS FOR TV ENGINEERS—Part II, by Donald G. Fink 78
How to use the RGB chromaticity diagram and convert it to the XYZ form

CAPACITIVE SLIP RING FOR INSTRUMENTATION, by F. P. Fischer and C. H. Coogan 84
Thermistors capacitively coupled to r-f bridge replace thermocouples, in studying high-speed impellers
speed impellers

PERMANENT-MAGNET ELECTRON MICROSCOPE, by J. H. Reisner and S. M. Zollers 86
Use of Alnico 5 to energize the lenses, and other design innovations, provide an efficient new instrument

GAIN-DOUBLING FREQUENCY CONVERTERS, by V. H. Aske 92
Technique for using new experimental pentode as converter to obtain high conversion transconductance and low noise

LOW-REFLECTION PICTURE TUBES, by C. S. Szegho, M. E. Amdursky, W. O. Read 97
External light reflections are reduced by double-etch process

ADJACENT-CHANNEL REJECTION RECEIVER, by Henry Magnuski 100
Concentration of selective elements ahead of amplification improves performance

SOLENOID MOTOR CONTROL, by G. M. Chute 105
Simple industrial control for maintaining constant tension on wind-up roll

TELEVISION PICTURE FIDELITY, by M. W. Baldwin 106
Factors of image formation and limitations of the system and techniques

STATIC MAGNETIC MEMORY, by M. Kincaid, J. M. Alden, R. B. Hanna 108
New storage and control unit for medium-speed computing machines

SYNCHRO DATA SWITCHING CIRCUIT, by J. Corwin and S. Adler 112
System eliminates 180-degree ambiguity when sampling different synchro transmitters

IMPROVED VERTICAL SYNCHRONIZING SYSTEM, by Robert C. Moses 114
Vertical pulses from the composite sync signal are specially shaped to drive the blocking oscillator

BUSINESS BRIEFS 60
CROSSTALK 65
TUBES AT WORK 120
ELECTRON ART 124
NEW PRODUCTS 126
NEWS OF THE INDUSTRY 132
NEW BOOKS 138
BACKTALK 156
INDEX TO ADVERTISERS ..... (Last Page)

DONALD G. FINK, *Editor;* **W. W. MacDONALD**, *Managing Editor;* John Markus, Vin Zeluff, A. A. McKenzie, *Associate Editors;* William P. O'Brien, James D. Fahnestock, *Assistant Editors;* John M. Carroll (on Military Leave), Ronald Jurgen, Ann Mastropolo, Marilyn Wood, *Editorial Assistants;* Gladys T. Montgomery, *Washington Editor;* Harry Phillips, *Art Director;* Eleanor Luke, *Art Assistant*

KEITH HENNEY, *Consulting Editor*

H. W. MATEER, *Publisher;* **WALLACE B. BLOOD**, *Manager;* R. S. Quint, *Buyers' Guide Manager;* D. H. Miller, James Girdwood, *New York;* Wm. S. Hodgkinson, *New England;* Warren W. Shaw, *Philadelphia;* C. D. Wardner, *Chicago;* J. L. Phillips, *Cleveland;* J. W. Otterson, *San Francisco;* Carl W. Dysinger, *Los Angeles;* Ralph C. Maultsby, *Atlanta;* Bernard H. Butler, *London, England*

January, 1951 ELECTRONICS Vol. 24, No. 1

Member ABC and ABP

Published monthly with an additional issue in June by McGraw-Hill Publishing Company, Inc., James H. McGraw (1860-1948), Founder. **Publication Office, 99-129 North Broadway, Albany 1, N. Y.**

Executive, Editorial and Advertising Offices: McGraw-Hill Building, 330 W. 42nd St., New York 18, N. Y. Curtis W. McGraw, President; Willard Chevalier, Executive Vice-President; Joseph A. Gerardi, Vice-President and Treasurer; John J. Cooke, Secretary; Paul Montgomery, Senior Vice-President, Publications Division; Ralph B. Smith, Editorial Director; Nelson Bond, Vice-President and Director of Advertising; J. E. Blackburn, Jr., Vice-President and Director of Circulation.

Subscriptions: Address correspondence to Electronics—Subscription Service, 99-129 N. Broadway, Albany 1, N. Y., or 330 W. 42nd St., New York 18, N. Y. Allow ten days for change of address. Please indicate position and company connection on all subscription orders.

Single copies 75¢ for United States and possessions, and Canada; $1.50 for Latin America; $2.00 for all other foreign countries. Buyers' Guide $2.00. Subscription rates—United States and possessions, $6.00 a year; $9.00 for two years; $12.00 for three years. Canada, $10.00 a year; $16.00 for two years; $20.00 for three years. Pan American countries, $15.00 a year; $25.00 for two years; $30.00 for three years. All other countries $20.00 a year; $36.00 for two years, $40.00 for three years. Entered as second class matter August 29, 1936, at the Post Office at Albany, N. Y., under act of Mar. 3, 1879. Printed in U. S. A.

Copyright 1950, by McGraw-Hill Publishing Co., Inc.—All Rights Reserved.

BRANCH OFFICES: 520 North Michigan Avenue, Chicago 11, Ill.; 68 Post Street, San Francisco 4; Aldwych House, Aldwych, London, W.C. 2; Washington, D. C. 4; Philadelphia 3; Cleveland 15; Detroit 26; St. Louis 8; Boston 16; Atlanta 3, Ga.; 1111 Wilshire Blvd., Los Angeles 17; 738-9 Oliver Building, Pittsburgh 22. **ELECTRONICS is indexed regularly in** The Engineering Index

Let MARION help you . . .

. . . seal components *hermetically*

. . . speed up sub-assemblies

Marion portable, bench-type induction soldering unit . . . .

- SMALL
- COMPACT
- ADAPTABLE
- EFFICIENT
- ECONOMICAL
- EASY-TO-USE

A PRODUCTION TOOL This unit was designed to simplify and improve both the quality and quantity of production of many different assemblies in the electronic and electrical fields. It has been used successfully for many years in the manufacture of Marion hermetically sealed instruments. Assembly applications include magnet assemblies, relay armatures, connectors, capacitors and transformer cans and germanium diode assemblies; also jewelry, watches, toys, automotive parts, household fixtures, etc.

HERMETICALLY SEALED COMPONENTS Because of the present intense interest in hermetically sealed components, Marion offers the benefit of its experience in true glass-to-metal hermetic sealing with the Marion Induction Soldering Unit and Marion metalized (platinum film) glass. Marion platinum film base glass has been developed to permit higher sealing temperatures, greater thermal shock range and resoldering if necessary.

PROFIT FROM EXPERIENCE Investigate now. Submit your requirements. We will be glad to supply samples and quotations. Ask for bulletin. Marion Electrical Instrument Company, 401 Canal Street, Manchester, New Hampshire.

MANUFACTURERS OF
MARION RUGGEDIZED
INSTRUMENTS

marion meters

PUT YOUR NAME ON OUR MAILING LIST

for

TECHNIQUE

MUIRHEAD

A JOURNAL OF INSTRUMENT ENGINEERING

MUIRHEAD APPARATUS COVERS A WIDE RANGE OF REQUIREMENTS FOR ELECTRICAL MEASUREMENTS AND TESTING, SERVO AND REMOTE CONTROL PURPOSES, AND FOR PHOTOTELEGRAPHY.

AVAILABLE FREE OF CHARGE

- **TO RESEARCH WORKERS**
- **TO TECHNICIANS**
- **TO SCIENTISTS**
- **TO ENGINEERS**

and others who are interested in scientific and electronic instruments and their applications

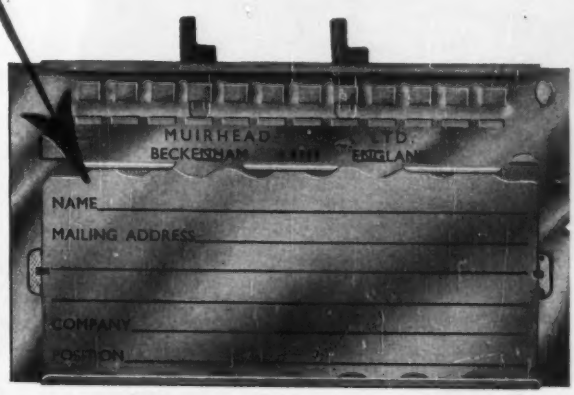

POST COUPON TODAY

MUIRHEAD & CO LTD

PRECISION ELECTRICAL INSTRUMENT MAKERS

BECKENHAM · KENT · ENGLAND

Telegrams & Cables MUIRHEAD ELMERS-END

PRECISION MUIRHEAD ELECTRICAL INSTRUMENTS

33

A complete line

for resistors too!

Unusual *combinations of characteristics* required in today's critical electronic circuits demand a complete range of resistor types. Specializing in resistors, IRC makes the widest line in the industry. This means ease of procurement—a single dependable source of supply for *all* your resistance needs. It also means unbiased recommendations—no substitution of units "just as good". IRC's complete line of products; complete research and testing facilities; complete network of licensees for emergency production—all add up to complete satisfaction for you.

CONTROLS



IRC Type W Wire Wound Controls are designed for long, dependable service and balanced performance in every characteristic. These 2-watt variable wire wound units provide maximum adaptability to most rheostat and potentiometer applications within their power rating. Catalog Bulletin A-2.

IRC New Type Q Controls feature small 1⅛" size, rugged construction and superior performance. Increased arc of rotation permits same resistance ratios successful in larger IRC Controls. Catalog Bulletin A-4.

PRECISION RESISTORS

IRC Precision Wire Wounds offer a fine balance of accuracy and dependability for close-tolerance applications. Extensively used by leading instrument makers, they excel in every significant characteristic. Catalog Bulletin D-1.

IRC Deposited Carbon PRECISTORS combine accuracy and economy for close-tolerance applications, where carbon compositions are unsuitable and wire-wound precisions too expensive. Catalog Bulletin B-4.

IRC Matched Pairs provide a dependable low-cost solution to close-tolerance requirements. Both Type BT and BW Resistors are available in matched pairs. Catalog Bulletin B-3.

IRC Sealed Precision Voltmeter Multipliers are suitable and dependable for use under the most severe humidity conditions. Each consists of several IRC Precisions mounted and interconnected, encased in a glazed ceramic tube. Catalog Bulletin D-2.

is essential

INSULATED COMPOSITION and WIRE WOUND RESISTORS

IRC Advanced Type BT Resistors meet and beat JAN-R-11 Specifications at ½, ½, 1 and 2 watts—combine extremely low operating temperature with excellent power dissipation. Catalog Bulletin B-1.

IRC Type BW Wire Wound Resistors are exceptionally stable, inexpensive units for low range requirements. Have excellent performance records in TV circuits, meters, analyzers, etc. Catalog Bulletin B-5.

IRC Type BTAV High Voltage Resistors, developed for use as discharge resistors in fluorescent "Quick Start" ballasts, withstand momentary peak surge of 6000 volts. Also suited to TV blander circuits. Catalog Bulletin B-1.

HIGH FREQUENCY and HIGH POWER RESISTORS



IRC Type MP High Frequency Resistors afford stability with low inherent inductance and capacity in circuits involving steep wave fronts, high frequency measuring circuits and radar pulse equipment. Available in sizes from ½ to 90 watts. Catalog Bulletin F-1.

Type MV High Voltage Resistors utilize IRC's famous filament resistance coating in helical turns on a ceramic tube to provide a conducting path of long, effective length. Result: Exceptional stability even in very high resistance values. Catalog Bulletin G-1.

IRC Type MVX High Ohmic, High Voltage Resistors meet requirements for a small high range unit with axial leads. Engineered for high voltage applications, MVX has exceptional stability. Catalog Bulletin G-2.

IRC Type MPM High Frequency Resistors are miniature units suitable for high frequency receiver and similar applications. Stable resistors with low inherent inductance and capacity. Body only ⅜" long. Catalog Bulletin F-1.

POWER RESISTORS

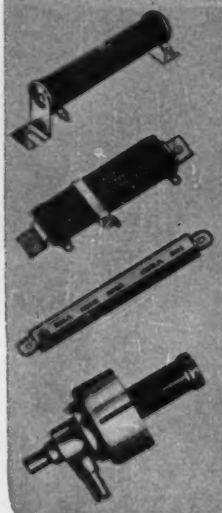

IRC Fixed and Adjustable Power Wire Wounds give balanced performance in every characteristic—are available in a full range of sizes, types and terminals for exacting, heavy-duty applications. Catalog Bulletin C-2.

IRC Type FRW Flat Wire Wound Resistors fulfill requirements of high wattage dissipation in limited space—may be mounted vertically or horizontally, singly or in stacks. Catalog Bulletin C-1.

IRC Type MW Wire Wound Resistors offer low initial cost, lower mounting cost, flexibility in providing taps, and saving in space. Completely insulated against moisture. Catalog Bulletin B-2.

IRC Type LP Water-Cooled Resistors for TV, FM and Dielectric Heating Applications. Cooled internally by high velocity stream of water; adjustable to local water pressure and power dissipation up to 5 K.W.A.C. Catalog Bulletin F-2.

Wherever the Circuit Says —W—

Power Resistors • Voltmeter Multipliers • Insulated Composition Resistors • Low Wattage Wire Wounds • Volume Controls • Voltage Dividers • Precision Wire Wounds • Deposited Carbon Precistors • Ultra-HF and High Voltage Resistors • Insulated Chokes

IRC

INTERNATIONAL RESISTANCE COMPANY

PHILADELPHIA 8, PENNSYLVANIA

(In Canada: International Resistance Company, Ltd., Toronto, Licensee

INTERNATIONAL RESISTANCE CO. B
403 N. BROAD ST., PHILADELPHIA 8, PA.

Please send me Technical Data Bulletins checked below:

☐ Bulletin A-2 (W)	☐ Bulletin B-4 (DC)	☐ Bulletin F-1 (MP)
☐ Bulletin A-4 (Q)	☐ Bulletin B-5 (BW)	☐ Bulletin F-1 (MPM)
☐ Bulletin B-1 (BT)	☐ Bulletin C-1 (FRW)	☐ Bulletin F-2 (LP)
☐ Bulletin B-1 (BTAV)	☐ Bulletin C-2 (PWW)	☐ Bulletin G-1 (MV)
☐ Bulletin B-2 (MW)	☐ Bulletin D-1 (WW)	☐ Bulletin G-2 (MVX)
☐ Bulletin B-3 (M/P)	☐ Bulletin D-2 (MF)	

NAME.....

TITLE.....

COMPANY.....

ADDRESS.....

CITY.....ZONE.....STATE.....

J. P. ARNOT & CO., ADV. AGENCY

7½ million operations,

ADLAKE RELAYS AT WORK
—One of a series of advertisements on specific ADLAKE applications.

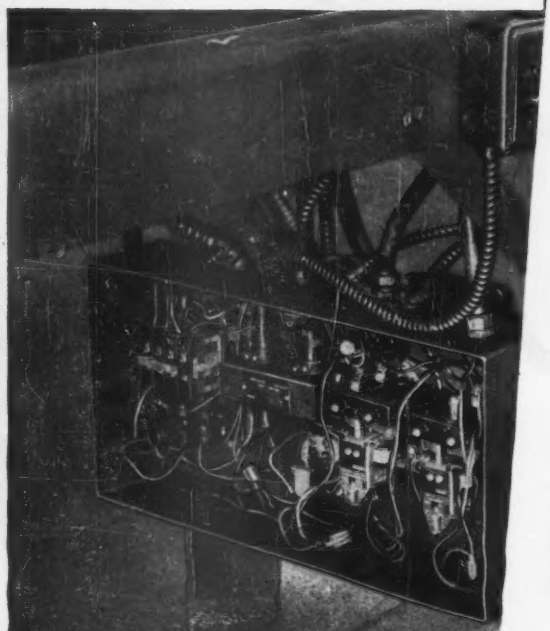

without a single failure!

ADLAKE Mercury Relays Set New Standards of Dependability for Automatic Tooling Machines

THE ADLAKE RELAY in this facing machine control box at the Northern Indiana Brass Co. was installed October 18, 1948. Prior to its installation, the machine had been subject to frequent expensive breakdowns. Yet since it was installed, *the relay has operated continuously 7½ million times with no maintenance whatever—and the machine has had no breakdowns!*

ADLAKE RELAYS are designed and built to meet the most exacting needs of industry. Their mercury-to-mercury contact prevents burning, pitting and sticking, and their sturdy construction armors them against outside vibration or impact. And most important of all, *they require no maintenance,* for they are hermetically sealed against dust, dirt and moisture.

For the full story on the part ADLAKE Relays can play in *your* business, just drop a card to The Adams & Westlake Company, 1107 N. Michigan, Elkhart, Indiana. No obligation, of course.

ADLAKE Mercury Relays Bring These Advantages to Every Installation:

- HERMETICALLY SEALED—dust, dirt, moisture oxidation and temperature changes can't interfere with operation.
- SILENT AND CHATTERLESS
- ABSOLUTELY SAFE
- REQUIRE NO MAINTENANCE

THE Adams & Westlake COMPANY

Established 1857 • ELKHART, INDIANA • New York • Chicago
Manufacturers of
Hermetically Sealed Mercury Relays for Timing, Load and Control Circuits

No. 10 of a Series

Another Engineer's Problem Solved

SUBJECT: X-Ray Power Supply Capacitors

PROBLEM: To reduce the volume and cost of 50 KV to 200 KV capacitors

SOLUTION: We were asked to produce an X-ray capacitor "as small as possible" because our Plasticon Type AO capacitors are known to occupy considerably less volume than paper capacitors. We decided that the conventional cylindrical capacitor could be improved upon by using a rectangular bakelite tube. Our reason was as follows: in this type of high voltage capacitor, the individual series capacitor elements are at right angles to the long axis of the tube. Since the elements are more or less rectangular in shape, in a round tube, only a square cross-section is used. Only 63% of the internal volume is occupied by the elements.

Instead of gasket sealing the round tube by spinning an aluminum cap down on the external thread in the bakelite, aluminum bar stock is bolted to the side walls and pressure is applied to the gasket surface by a plate held by screws in blind tapped holes in the bar stock. This eliminates special machined castings.

A typical example of the volume saved is as follows: a .04 mfd, 75 KV paper capacitor measures 11½ inches in diameter and is 16 inches high. A Type AOB Plasticon rectangular capacitor is the same length, but has a base of only 8½" by 6". Thus, our capacitor utilizes only 37% of the base area required by the paper capacitor. The cost is also less.

What is YOUR engineering problem?
Your inquiries will receive immediate attention.

We manufacture a standard line of Plasticon Capacitors, Pulse Forming Networks and High Voltage Power Supplies.

Write for our latest catalog.

Condenser Products Company

1375 NORTH BRANCH STREET • CHICAGO 22, ILLINOIS

Now Corning Gives You

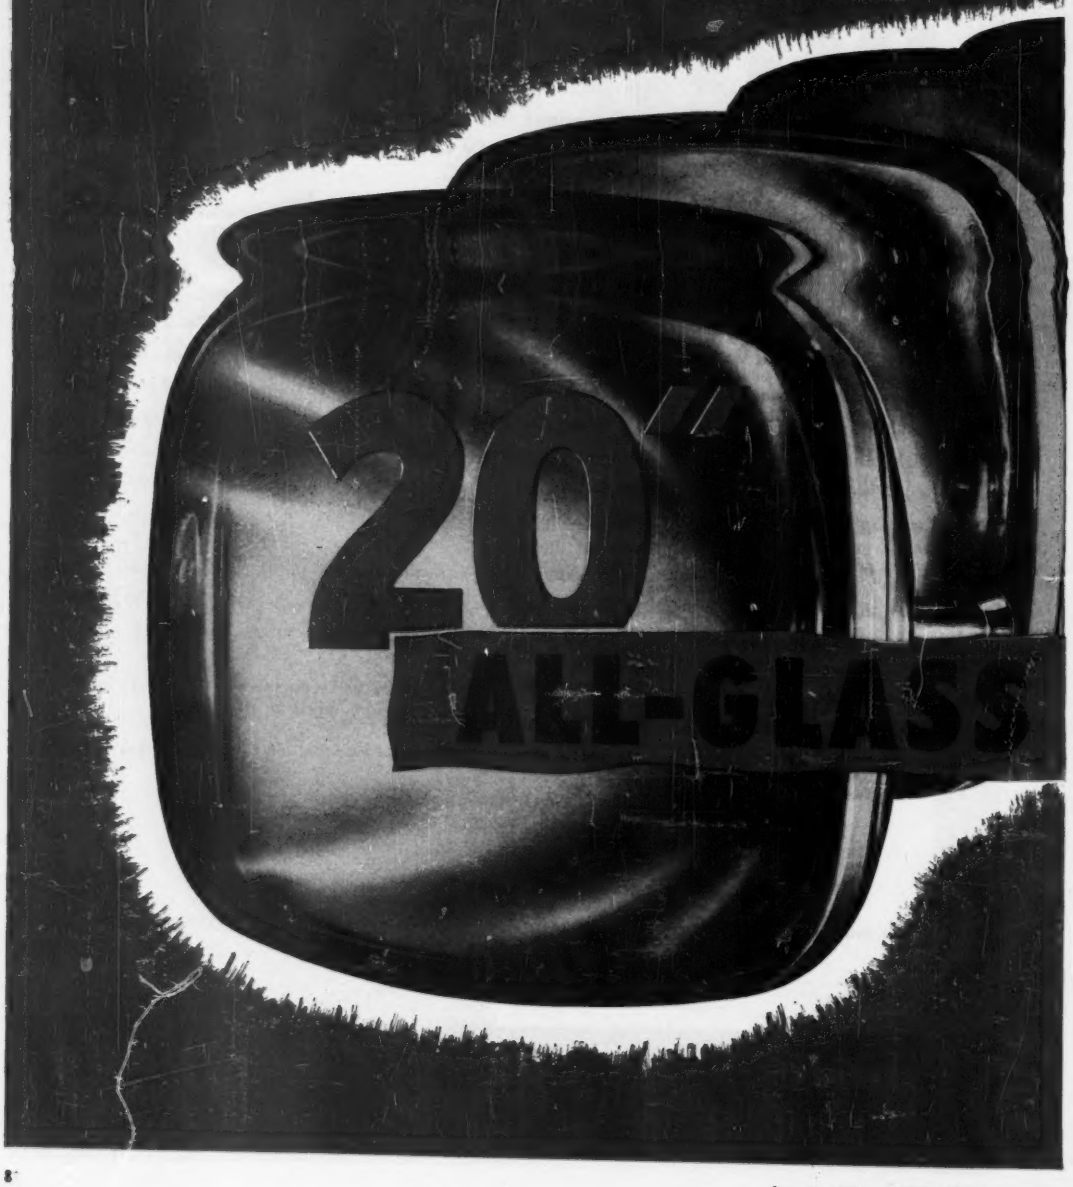

New Corning Plant at Albion, Michigan, devoted exclusively to television bulb manufacturing is now in operation. The latest in equipment and efficient layout provides additional volume production of the finest all-glass television bulbs.

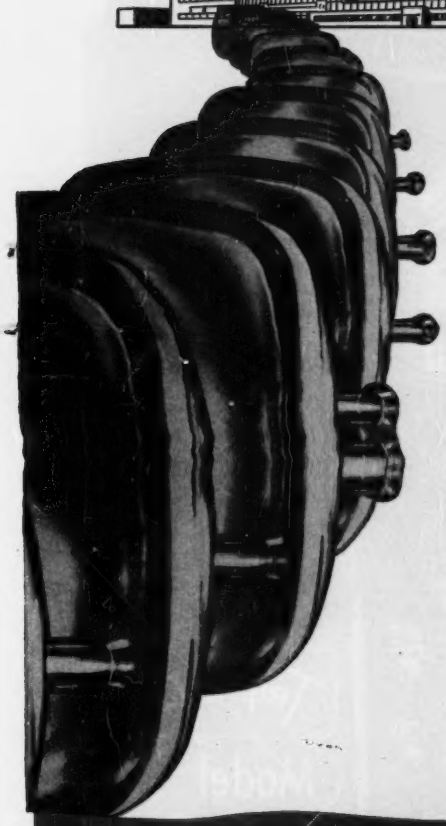

television bulbs

When television was still a laboratory curiosity, Corning made the *first* experimental bulbs. All during the early stages of T-V set production, Corning was the principal manufacturer of television bulbs. In keeping with this tradition, and in answer to demands from the Television Industry, Corning has introduced the *all-glass 20" rectangular bulb!*—the largest T-V bulb in volume production today.

The first of this size on the market, the new 20" bulb combines all the improvements developed through years of research at Corning. Among these are light-weight, lead-free glass ideally suited to electronic applications, stronger bulb assemblies from electric sealing, and constant quality from improved glass melting and forming techniques. The new Corning 20" all-glass bulb is the last word in quality, durability and size.

PYREX

CORNING GLASS WORKS, CORNING, N. Y.

Corning means research in Glass

ELECTRONIC SALES DEPARTMENT—ELECTRICAL PRODUCTS DIVISION

1851 · 100 YEARS OF MAKING GLASS BETTER AND MORE USEFUL · 1951

CAUTION ON HIGH VOLTS
OFF
6000
1200
300
60
12
3
12A
120
12
1.2
ADJ
DCV
ACV
6000
6.0
mA
AC
OUT PUT
COM
X 1
X 10
X 1000
X 100 000
Triplett
Model
630
There is no more useful
and dependable instrument made
FOR THE MAN WHO TAKES PRIDE IN HIS WORK
Triplett
TRIPLETT ELECTRICAL INSTRUMENT COMPANY · BLUFFTON, OHIO, U.S.A.
ONLY $39.50 AT YOUR DISTRIBUTOR

Karp keeps both doors open!

Our company is now deeply engaged in the manufacture of fabricated metal housings and components of critically needed defense equipment.

If the world-wide crisis continues, these jobs will continue to receive high priority. This does not mean, however, that civilian orders will not be given every possible consideration, within our ability.

Actually, most of our customers manufacturing defense equipment are regular customers who make the same apparatus in peace and war. The only essential difference now is that we are doing their work in greater quantity. Hence, for most of our customers we are rendering an *increased* amount of service.

For those whose products do not classify as vital to defense, the door is still open, and we shall continue to serve them in any manner possible that does not retard any defense project.

KARP METAL PRODUCTS CO., INC.

215 63rd STREET, BROOKLYN 20, NEW YORK

Specialists in Fabricating Sheet Metal for Industry

McCarthy Boosts KVA Rating 30%

with

NATVAR VARNISHED FIBERGLAS

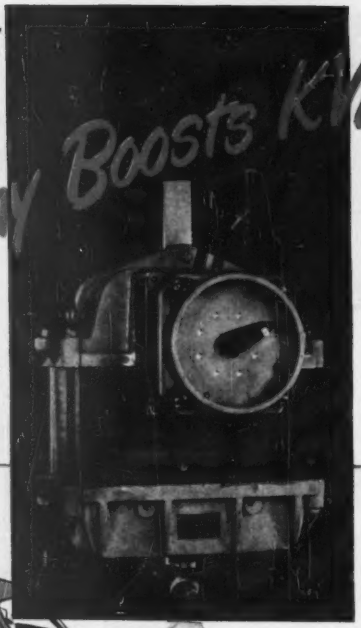





This McCarthy Type 523-PG welding transformer is compact and weighs only 458 pounds, yet it is rated 75KVA, 220 or 440 primary volts (not interchangeable), 60 cycle, 1 phase, 108°C temperature rise, at 50% duty cycle. An extra heavy heat selector switch gives secondary voltages in eight steps from 5.00 to 9.16, parallel connection, or 10.0 to 18.32, series connection.

Primary coils are insulated between turns with Natvar varnished Fiberglas tape, dipped and baked. The wound coil is then insulated with mica and Natvar varnished Fiberglas tape, again dipped and baked, and finished with air drying varnish. Secondary coils are heavy wall square copper tubes through which cooling water circulates. Leads are insulated and protected with Natvar 400 heat resistant extruded vinyl tubing.

McCARTHY ELECTRIC CO., Detroit, manufactures welding transformers used extensively on production lines in the automotive industry for welding bodies and various fabricated parts, and in the refrigerator industry for welding boxes. Since it is more practical to weld large assemblies with guns rather than on stationary machines, portability is important. Size and weight of the transformer must therefore be kept at a minimum. And because many of these units are in continuous service 24 hours a day, long life is important, too.

By designing and building these transformers for higher continuous operating temperatures, McCarthy has succeeded in raising capacity 30% without increasing the size or weight. McCarthy has standardized on Natvar varnished Fiberglas and Natvar 400 Extruded Vinyl Tubing because of their uniformly high resistance to heat, and because both have exceptional aging characteristics, which means longer life.

All Natvar flexible insulations are consistently uniform, no matter when or where purchased. They are immediately available either from your wholesalers' stocks or direct from our own.

Natvar

Natvar Products

- Varnished cambric—straight cut and bias
- Varnished cable tape
- Varnished canvas
- Varnished duck
- Varnished silk
- Varnished special rayon
- Varnished Fiberglas cloth
- Silicone coated Fiberglas
- Varnished papers
- Slot insulation
- Varnished tubings and sleevings
- Varnished identification markers
- Lacquered tubings and sleevings
- Extruded vinyl tubing and tape
- Extruded vinyl identification markers

Ask for Catalog No. 21

THE NATIONAL VARNISHED PRODUCTS Corporation

Telephone Rahway 7-5800

Cable Address NATVAR: Rahway, N. J.

201 RANDOLPH AVENUE ★ WOODBRIDGE, NEW JERSEY

ADVENTURES IN ELECTRONIC DESIGN

Centralab's Printed Electronic Circuits May Solve a Problem for You

In a busy Washington office during the past war hung a sign which said — "We do the miraculous every day — the impossible takes just a little longer." Today, that sign could hang in the offices of Centralab. For example, someone wanted a *small* speech amplifier Centralab's answer — Ampec, a full 3 stage unit, two of which can fit inside of a regular pack of cigarettes! A radio manufacturer wanted a *small* audio-detection unit. Centralab's answer Audet, a unit one-third size of an ordinary soda-cracker! How were these things done? With Centralab's ERC Printed Electronic Circuits — a pioneered development of Centralab. Yes, and here are some of the benefits that many manufacturers of radio TV sets and other electronic gear have reaped from using PEC's. They've eliminated numerous individual parts their handling, inventory and assembly. They've gotten more consistent and better performance results. They've reduced finished product size and weight. They've eliminated wiring errors and cut down on the number of soldered connections. What's more, they've been able to stretch their resistor supplies . . . an important factor in meeting current volume demands for TV and radio production. Look over your own situation. Want to cut costs? Speed up assembly? Then on the next two pages you may see a Centralab Printed Electronic Circuit unit that will help you do just that! If you don't see what you want — contact us. Tell us your problems. Maybe we can do the miraculous or take a little longer and accomplish the impossible!

Centralab — DEVELOPMENTS THAT CAN HELP YOU

Division of GLOBE-UNION INC., Milwaukee

SPEED PRODUCTION...
Use P.E.C.'s *...

*PRINTED ELECTRONIC CIRCUITS
— ARE COMPLETE OR PARTIAL CIRCUITS (including all integral circuit connections) consisting of pure metallic silver and resistance materials fired to CRL's famous Steatite or Ceramic-X and brought out to convenient, permanently anchored external leads. They provide compact miniature units of widely diversified circuits — from single resistor plates to complete speech amplifiers. No other modern electronic development offers such tremendous time and cost saving advantages in low-power applications. See back page for list of technical literature or write for direct factory consulation on your problem.
Centralab

CUT ASSEMBLY COSTS
Conserve Resistors

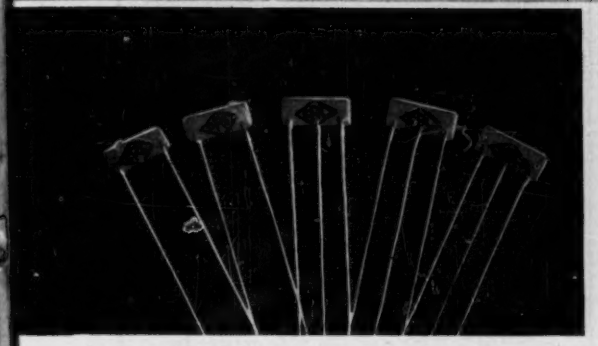

Actual size photo of plate capacitor, resistor, and resistor-capacitor units. Because of size and ease of installation, they easily fit miniature and portable electronic equipment — overcome crowded conditions in TV, AM, FM, and record-player chasses. For complete data, check coupon No. 42-24 — Ceramic Plate Components.

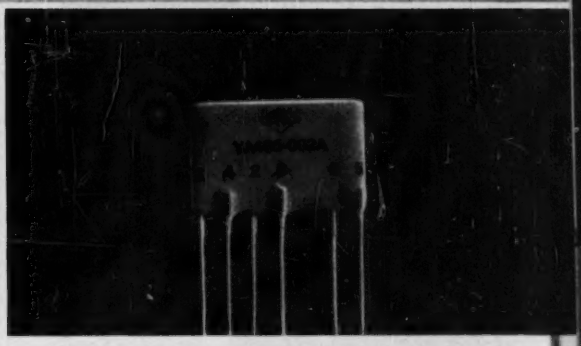

Pentode couplates are complete interstage coupling circuits consisting of 3 capacitors and 3 resistors on a small 6 lead ceramic plate. Compared with old-style audio circuits, they reduce soldered connections 50% — wiring errors accordingly. Big saving in space and weight. For complete data, check coupon No. 999—Pentode Couplate.

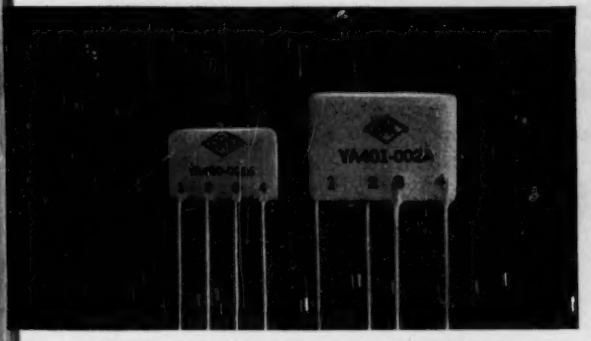

Centralab Triode Couplates save space and weight, replacing 5 components normally used in audio circuits. They consist of 3 capacitors and 2 resistors bonded to a dielectric ceramic plate. Available in variety of resistor and capacitor values. For complete data, check coupon No. 42-6 — Couplate, and No. 42-27 — Model 2 Couplate.

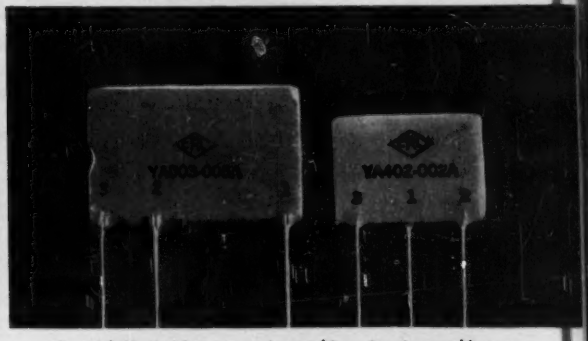

Centralab Vertical Integrators give you big savings in assembly costs in TV vertical integrator networks. One type consists of 4 resistors and 4 capacitors brought out to 3 leads . . . reducing formerly required 16 soldered connections to 3! There're less parts handled, too! For complete data, check coupon No. 42-22—Vertical Integrator.

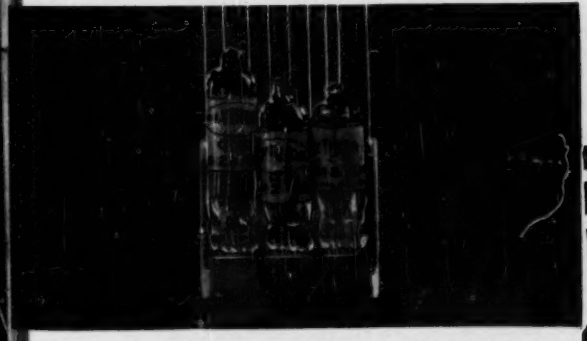

Ampec is a full 3-stage, 3-tube speech amplifier with amazingly efficient, reliable performance. Size 1¼" x 1⅛" x .340" over tube sockets! Used in hearing aids, mike preamps and similar applications where small size and outstanding performance counts. For complete data, check coupon No. 973 — Ampec.

Centralab

CRL

Division of GLOBE-UNION INC. • Milwaukee

TEAR OUT COUPON

for the Bulletins you want

CENTRALAB
Division of Globe-Union Inc.
914 East Keefe Avenue, Milwaukee, Wisconsin

Yes—I would like to have the CRL bulletins, checked below, for my technical library!

☐ 42-24 ☐ 999 ☐ 42-6 ☐ 42-7 ☐ 42-22 ☐ 973

Name.....

Address.....

City..... **State**.....

HEAVY, LESS EFFICIENT and slower to assemble, was the original Weller Soldering Gun composed of the parts shown. Compare these with the fewer parts at right in the new Gun, and you'll readily see why the new streamlined Weller is so popular.

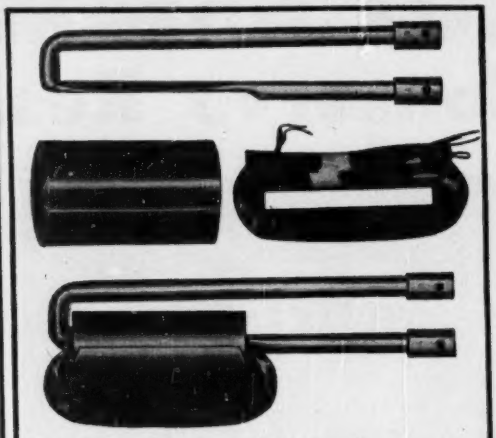

THE NEW WELLER SOLDERING GUN handles 250 watts; heats, ready for use, in five seconds; has longer range to get into the tight spots, and is equipped with spot light. Uses current only when trigger is operated. It is assembled faster. Requires no bolts or nuts. The ⅜" Revere Copper Rod that replaces the secondary coil in the transformer is sheared, flattened, and bent at right angles in a 200-ton press in a single operation.

COPPER TREATS YOUR PRODUCT BETTER WHEN YOU

Control Your Temper

Revere Copper Rod replaces Secondary Coil in Soldering Gun Transformer . . . reduces number of parts, makes for a speedier, more efficient assembly . . . also makes possible a lighter, more compact unit of increased capacity.

WHEN the Weller Manufacturing Company, Easton, Pa., was completing the development of its new electric soldering gun, they were confronted with this problem: The ⅜" Revere Copper Rod used to replace the secondary coil in the transformer had to maintain its rigidity yet be sufficiently soft so that during the shearing, coining, and bending operations there would be no breaking or splitting of the rod.

Revere's Technical Advisory Service recommended a certain temper copper rod. It was discovered that Weller was getting a twist in the rod when it was installed in the assembled gun. Other tempers were tried and tested. Then a copper rod of a slightly harder temper than the first was recommended. That was it! Proper temper was the key. Proper temper was also the key to the .291 dia. copper rod used for the Soldering tip itself. For this, too, had to retain its rigidity and yet remain soft enough to be coined, punched, and formed without fracture.

"In addition to being extremely helpful in arriving at the proper tempers, Revere also recommended that we specify our rod in multiple lengths, and thus save considerably on scrap. They were also helpful in solving the problem of attaching the brass sleeve to the secondary rod in our Soldering Gun," the Weller Manufacturing Company tells us.

So you see, Revere's interest in your problem does not stop with the recommendation of its products. Perhaps Revere can help you. Why not take your current problem to the nearest Revere Sales Office and see?

REVERE

COPPER AND BRASS INCORPORATED

Founded by Paul Revere in 1801

230 Park Avenue, New York 17, New York

•

Mills: Baltimore, Md.; Chicago, Ill.; Detroit, Mich.; Los Angeles and Riverside, Calif.; New Bedford, Mass.; Rome, N. Y.

Sales Offices in Principal Cities, Distributors Everywhere.

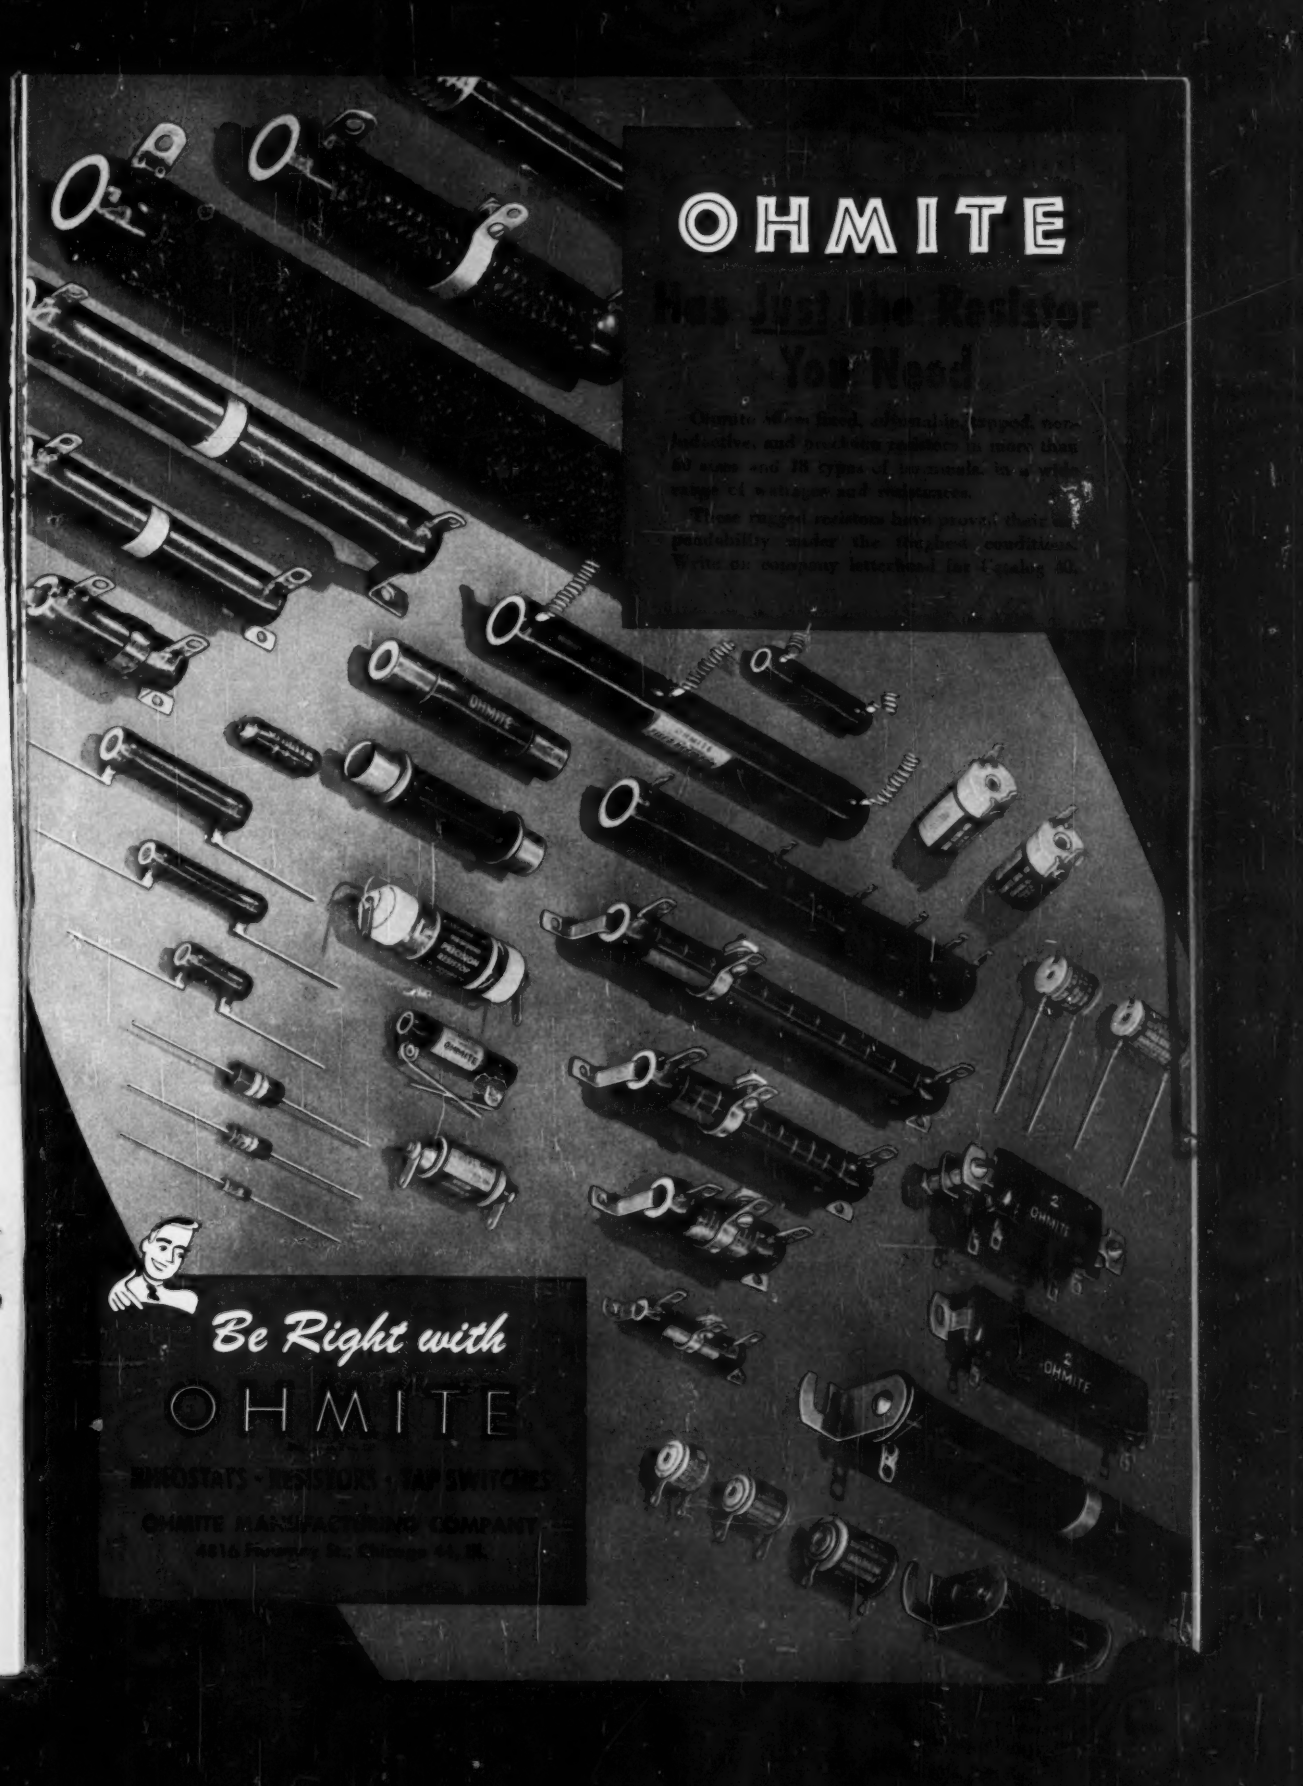
OHMITE
has Just the Resistor
You Need
Be Right with
OHMITE
RHEOSTATS · RESISTORS · TAP SWITCHES
OHMITE MANUFACTURING COMPANY
4816 Flournoy St., Chicago 44, Ill.

OHMITE THIN RESISTORS

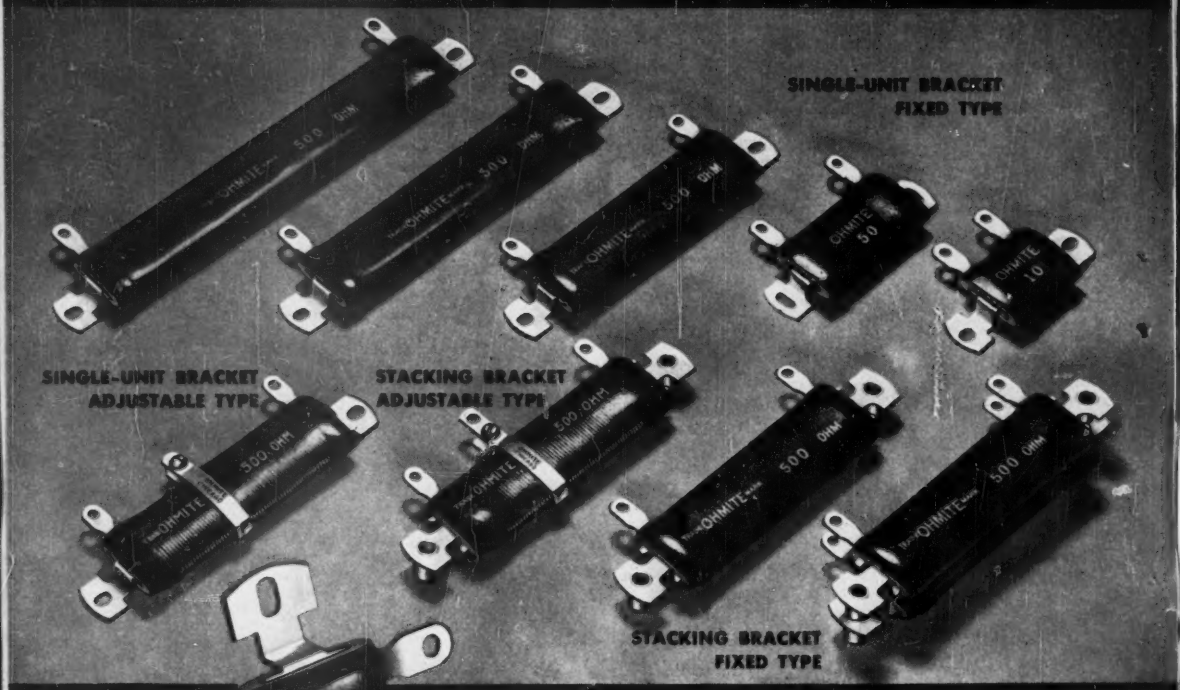

OHMITE

RHEOSTATS • RESISTORS • TAP SWITCHES

specify Sorensen

RANGERS

(FULL-RANGE-VARIABLE DC SUPPLYS)

This versatile supply is a combination of the widely used Sorensen NOBATRON and a filter-variable output circuit.

The result gives a continuously variable output voltage regulated against line and load changes through the full range of the instrument.

Look at the specifications tabulated below — check them against your requirements. Where range of output, adaptability to diverse applications is essential, the Sorensen RANGER may well be your instrument of choice.

ELECTRICAL SPECIFICATIONS

Model No.	SR-10	SR-30	SR-50
Output range	0 - 135 VDC	0 - 30 VDC	0 - 13 VDC
Current range	1 - 10 amps	3 - 30 amps	5 - 50 amps
Input voltage	95 - 130 VAC, 50 - 60 cycles, single phase		
Regulation accuracy	± 0.25 percent at any voltage setting from 3 VDC to top rating		
Ripple	RMS max. 1% of output setting		

Meters — standard. Coarse and fine adjustment available.

Write for complete information.

For other regulated DC supplys, investigate Sorensen's line of NOBATRONS (low voltage) and B-NOBATRONS (high voltage).

controlled POWER converted

Sorensen and company, inc.

375 FAIRFIELD AVE. • STAMFORD, CONN.

Temflex 105 extruded plastic tubing affords longer retention of flexibility and original insulation characteristics. Use it for higher operating temperatures, for high voltage conductors, for oil-cooled transformers. For details, test reports, samples, write today.

Look to Irvington
for Insulation Leadership

ENDURES HEAT – Temflex 105 is Underwriters' Laboratories approved for continuous operation at 105°C!

SUPERIOR INSULATION – Temflex 105 maintains consistently high dielectric strength!

MOISTURE RESISTANT – Temflex 105 effectively seals out moisture – is Underwriters' approved for use in damp locations!

STRONG, TOUGH – Temflex 105 gives you tensile strength of 3,000 p.s.i. – with minimum elongation of 300%!

FLEXIBLE WHEN COLD – Temflex 105 stays flexible down to temperatures as low as –40°C!

RESISTS CHEMICALS – Temflex 105 shows good resistance to solvents, is unaffected by strong acid or alkali!

WITHSTANDS HOT OIL – Temflex 105 retains flexibility and dielectric properties after prolonged immersion in oil over 100°C!

IRVINGTON VARNISH & INSULATOR COMPANY
Irvington 11, New Jersey

FILTRON

RF INTERFERENCE SUPPRESSION

to New Heights of NOISE ELIMINATION

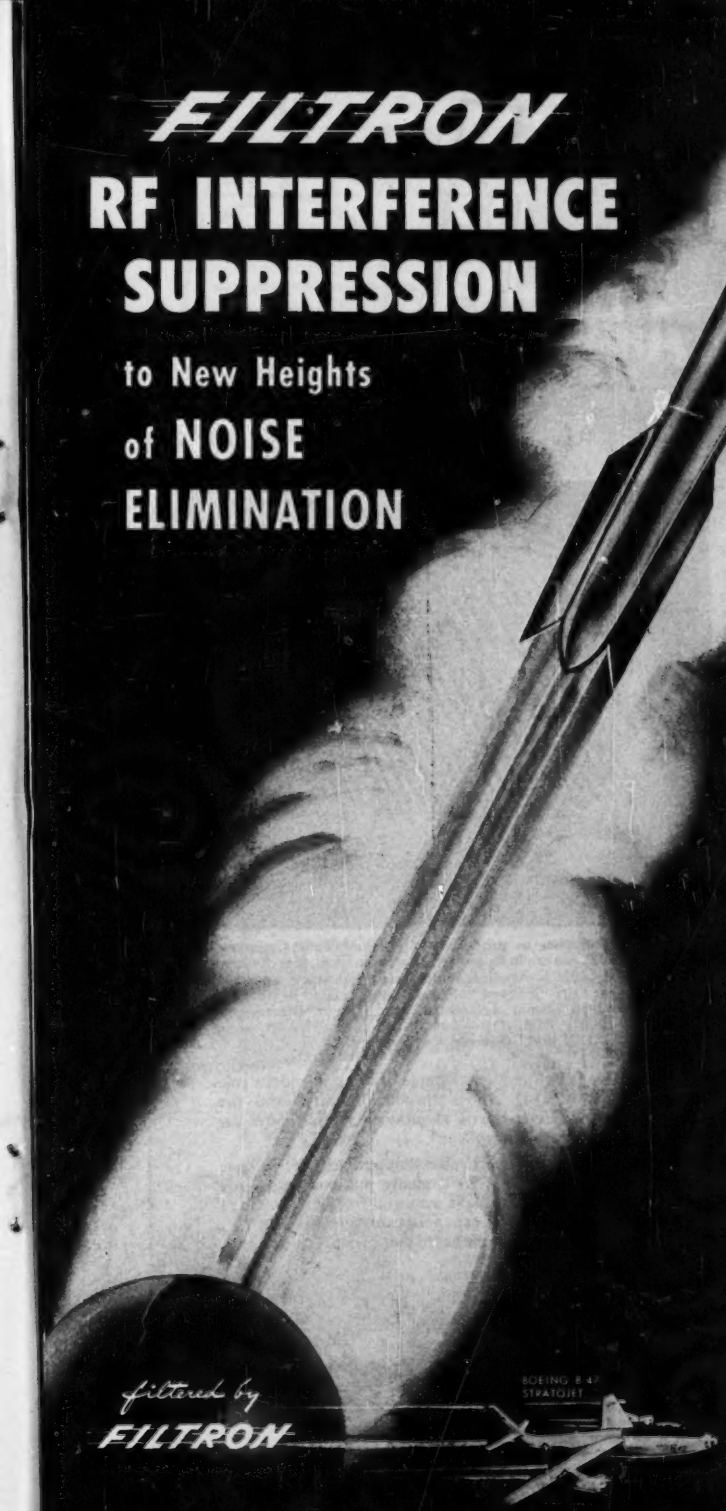

filtered by FILTRON

FILTRON IS SPECIFIED ON THE MAJORITY OF MODERN AIRCRAFT, GUIDED MISSILES, SIGNAL CORPS, ORDNANCE AND NAVAL EQUIPMENT

FILTRON will design the right filter for your circuit conditions to meet size, weight and electrical characteristics — and meet RF Interference Suppression Specifications wherever RF Interference must be eliminated.

FILTRON'S advanced engineering, due to constant research and development, together with FILTRON'S production know-how, insures quality components to meet your delivery requirements.

RF INTERFERENCE SUPPRESSION FILTERS FOR

Motors	Dynamotors
Generators	Power Plants
Inverters	Actuators
Electronic Controls	Gasoline Engines

And other RF Interference producing equipment

An inquiry on your Company letterhead will receive prompt attention

THE FILTRON CO., INC.

FLUSHING LONG ISLAND N. Y.

LARGEST EXCLUSIVE MANUFACTURERS OF RF INTERFERENCE FILTERS

Millimeters that do a Mammoth Job with Driver-Harris Alloys

The introduction of the indirectly heated "cathode" brought about revolutionary improvement in the operation of electron tubes for radio and TV reception. It eliminated AC hum in receivers, and actually increased emission at lower filament voltage. Thus tubes became considerably more efficient, and operating life was greatly extended.

And all this as the result of employing a tiny component—customarily measured in millimeters, or very small fractions of an inch!

It stands to reason that an item of such importance as the cathode must be manufactured from materials that are carefully produced to exacting specifications. Superior Tube Company, leading manufacturers of nickel alloy cathodes, specifies Driver-Harris Alloys for both "active" and "passive" cathode base metals. "Active" materials, producing a high level of electron emission, are D-H Alloys 399, 599 and 799; "passive" materials, employed when freedom from grid back-emission is necessary, are D-H Alloys 499 and 999. All are produced free from oxides, and with extreme accuracy as to dimensions, temper and purity. The commercial grade of pure nickel does not meet specifications.

A consideration of major importance is *surface*. The surface of materials used for cathodes must possess sufficient "tooth" to enable coatings of chemical emitters (such as Barium-Strontium Oxide) to adhere successfully—without cracking or spalling. Driver-Harris furnishes the precise type of surface required.

D-H Alloy Cathodes, as produced by Superior Tube Company, Norristown, Pa., are made from thin strip stock, of thicknesses such as .002" and .0025"—handled by patented machines especially developed for the purpose of producing plain or beaded "Lockseam" type nickel cathode sleeves. Basic Dimensions: Max. OD—.100"; Min. OD—.040". Max. Length—42 mm.; Min. Length—11.5 mm. (Compare with paper clip.)

Here is but another example of the tremendous role played by D-H Alloys thruout industry—and the ability of Driver-Harris to produce *special alloys for special purposes.*

Whatever *your* particular alloy problem, let us have your specifications. We'll gladly put our specialized knowledge, and the skills acquired from fifty years of alloy manufacturing experience, at your disposal . . . make recommendations based upon your specific needs.

FIFTIETH ANNIVERSARY — SPECIAL PURPOSE ALLOYS SINCE 1890 — D/H — TRADE MARK REG. U. S. PAT. OFF.

Manufacturers of world-famous Nichrome* and over 80 other alloys for the electronic, electrical and heat-treating industries

Driver-Harris Company

HARRISON, NEW JERSEY

BRANCHES: Chicago, Detroit, Cleveland, Los Angeles, San Francisco

*T.M. Reg. U. S. Pat. Off.

Choose JOHNSON Variable Condensers For

DEPENDABLE EFFICIENCY

Excellent design, careful workmanship and quality materials are combined in the manufacture of JOHNSON Variable Condensers to assure highest stability of the tuned circuit.

The entire JOHNSON line features high quality steatite insulation and sturdy construction — your assurance of long, dependable service.

Type C&D

Unusually economical for quality condensers, Types C and D have .051" thick, rounded aluminum plates, large laminated rotor brushes. Air gap from .080" to .250" (Type D) and .125" to .500" (Type C). Panel space, Type C, 5½" W x 5⅜" H. Type D, 4¼" W x 4" H.

Type E&F

Rugged, compact units for low and medium power transmitters. Aluminum plates .032" thick, rounded edges. Stainless steel shafts. Air gap from .045" to .125" (Type E) and .045" or .075" (Type F). Panel space, Type E, 2⅛" square; Type F, 2-1/16" square.

Type M

MINIATURE — SMALLEST EVER BUILT!

Ideal for VHF, miniature test equipment, etc. Soldered construction, silver plated beryllium copper contact spring, split sleeve rotor bearings — no shaft wobble. Made in single and differential models up to 19.6 mmf and butterfly up to 11 mmf. Panel space only ⅛" x ⅞". Air gap .017".

Type L

Ceramic soldered — no eyelets or rivets to loosen. All brass, soldered construction. "Bright alloy" plated. Ideal for rough service. Beryllium copper contact spring, silver plated. Made in butterfly, single and differential types. Panel space 1⅜" square. Air gap .030". Also furnished in .020", .060" and .080".

TYPE N

Small mounting space requirements, extremely high voltage rating and fine adjustment make these neutralizing condensers ideal.

TYPE G

Extremely popular as neutralizing condensers for medium and low power stages. Also widely used for grid and plate tuning at high frequencies.

WRITE TODAY FOR JOHNSON CONDENSER CATALOG!

TYPE BC . . . for Commercial and Broadcast use where high voltage, high current conditions prevail.



New aluminum die cast plates have heavy beaded round outer edge for maximum voltage breakdown. Cast aluminum end plates, with rounded edges, rugged steatite insulators with long creepage path. Width 7⅛", height 7-5/16". Voltage ratings up to 18,000 volts peak breakdown.

Many other types, including pressurized units, are made for high voltage, high power applications.

JOHNSON *a famous name in Radio*

E. F. JOHNSON CO. WASECA, MINN.

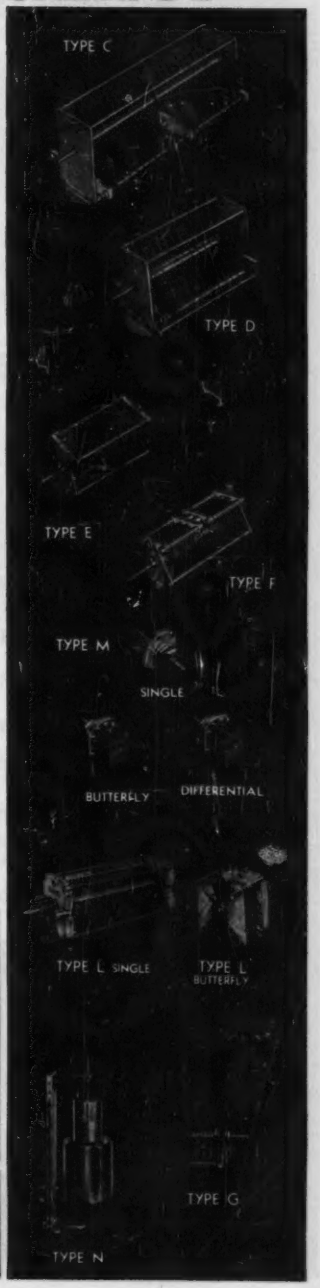

GRACOIL
Transformers
COILS
FOR YOUR GOVERNMENT REQUIREMENTS
Conventional and Hermetically Sealed Types
IT'S EASY... Simply submit your blueprint and an estimate will be promptly forwarded to you.
IF you desire a sample built to your specifications, it can be made for you in a short time.
SEND B/P FOR COST-FREE RECOMMENDATIONS
CRAMER
TRANSFORMER
CORPORATION
2734 N. PULASKI ROAD • CHICAGO 39, ILLINOIS

NEW INDICATOR ION TRAP

a Rauland "Exclusive"

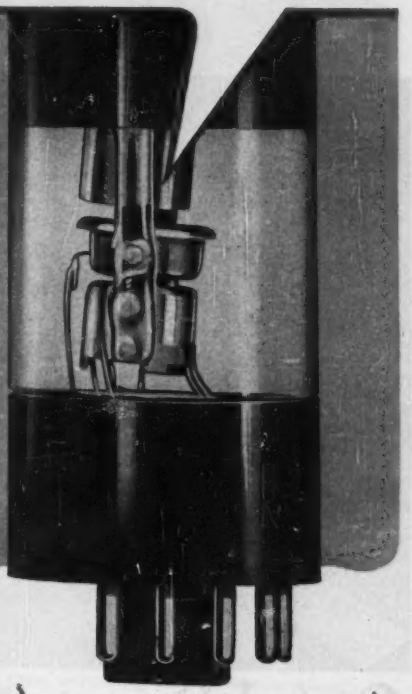

Helps you Cut Production Costs

Rauland's new Indicator Ion Trap can help you in your battle to cut pennies off production costs and thereby to price receivers competitively.

First of all, the Indicator Ion Trap completely eliminates the need for any equipment and any trained judgment in the adjustment of ion trap magnets. Adjustment can be made faster than equipment could be attached. The ion trap magnet is simply moved until the green glow signal is reduced to minimum. It can be done in seconds with absolute accuracy—without even seeing the front of the picture tube.

Second, the Rauland Tilted Offset Gun which incorporates this Indicator Ion Trap requires only one Ion Trap Magnet instead of two, nibbling a little more off production costs. Yet it gives better results—the electron beam is bent only once and is focused to maximum sharpness.

Specify Rauland tubes with these exclusive advantages, and get the benefits that only Rauland offers.

For further information, write to . . .

RAULAND

The first to introduce commercially these popular features:

Tilted Offset Gun

Indicator Ion Trap

Luxide (Black) Screen

Reflection-Proof Screen

Aluminized Tube

•

THE RAULAND CORPORATION

Perfection Through Research

4245 N. KNOX AVENUE • CHICAGO 41, ILLINOIS

Another
"DESIGN HEADACHE"
solved by INSUROK* T-725

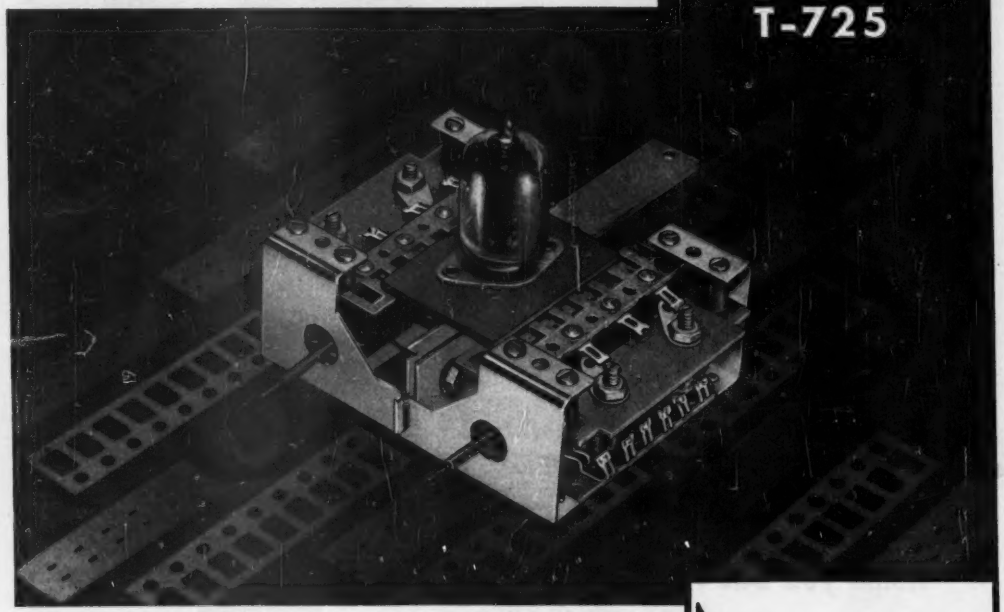

Centralab† **required a superior combination in the insulation for this unique slide switch used in Anchor Radio's TV preamplifier**

At the high frequencies encountered in TV equipment, insulating materials must possess a unique combination of many properties. To find such a material for its intricate slide switches, used in Anchor Radio's TV preamplifier, was the problem faced by Centralab engineers.

INSUROK T-725 laminated plastic insulation proved to be the answer. It had the necessary physical strength and electrical properties. It was stable under elevated temperatures and high humidity. And, from piece to piece, it remained uniform.

In hundreds of similar applications, laminated and molded INSUROK are solving difficult problems for industry. Richardson's years of experience in the engineering application of plastics are available to you without obligation. Write, today.

1. Uniform quality
2. Low electrical loss
3. Resistance to moisture
4. Electrical stability over a wide temperature range
5. Mechanical strength
6. Close tolerances

Write for Descriptive Data Sheet T-725

*Reg. U. S. Pat. Off.

†DIVISION OF GLOBE-UNION INC., MILWAUKEE

The RICHARDSON COMPANY

FOUNDED IN 1858—LOCKLAND, OHIO

Lake St., Melrose Park, Illinois (Chicago District)

SALES OFFICES: CLEVELAND • DETROIT INDIANAPOLIS • LOCKLAND, OHIO • MILWAUKEE NEW BRUNSWICK, (N. J.) • NEW YORK PHILADELPHIA • ROCHESTER • ST. LOUIS

YOUR FUTURE REQUIREMENTS

IN TOROIDAL COILS and FILTERS

OUR PROBLEM .. TODAY!

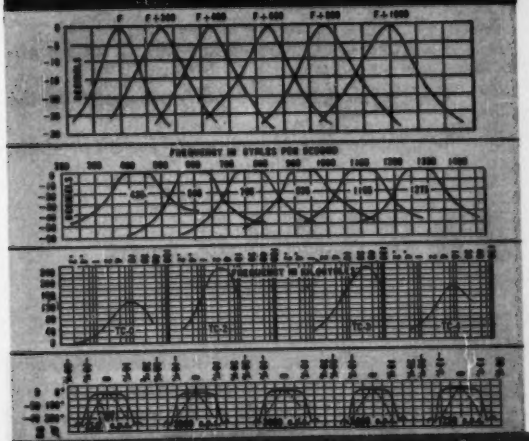

We do not lay claim to any special powers of prognostication, but we can compare ourselves to the seasoned hunter or veteran sailor in their ability to sense the way the wind is blowing. By maintaining constant vigil of the Horizon in our Industry, we strive to be well prepared to meet the ever changing requirements for high quality filters. In following this policy we have been able to give you 'Yes' or 'No' answers on the spot to your queries of 'is this practical' or 'can this be done?' If it can be done, we have probably tried it. If it cannot be done we are still trying to do it. This has obviated unnecessary expenditure of our customers' time and money, and has helped expedite the development of new equipment by eliminating the several blind alleys that can be so costly. In these times, especially, the continued application of foresight, ingenuity and new ideas, as well as the constant expansion of production facilities, will be the key note of our 'Burnell Customer Service.'

Exclusive Manufacturers of Communications Network Components

Burnell & Company
YONKERS 2, NEW YORK

For PERFORMANCE, PRICE, ADAPTABILITY, you just can't beat the *Tarzian Tuner!*

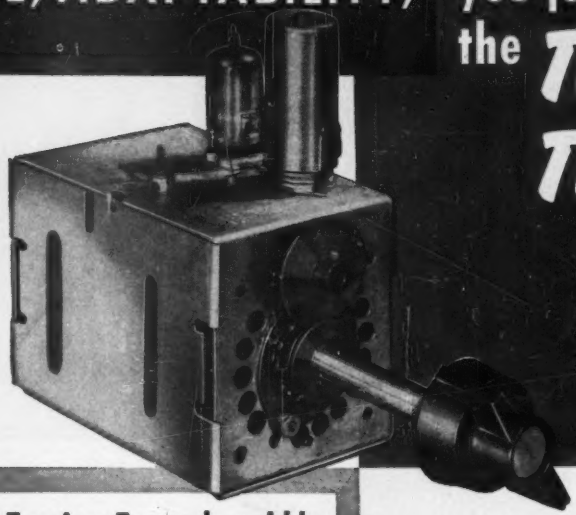

A compact, precision-built "package," offering maximum performance per dollar cost. And, backed by TARZIAN engineering "know-how."

Only Tarzian Tuner has *ALL* of these desirable Features

- Low oscillator radiation
- High gain and low noise
- Designed for 21 or 41 megacycle I.F. systems
- Insulated shaft design available at low cost
- Anti back lash, air dielectric fine tuning, giving uniform coverage on low and high channels
- Three tube performance with two tubes
- Each channel individually aligned for maximum performance
- Good input balance—no tracking difficulties
- Completely shielded
- Oscillator tube shield provides rigid horizontal and vertical positioning of the tube
- Extra terminals provided for tie-points

Write for complete information, specifications and technical data.

● Since the time it was first introduced, the TARZIAN front-end tuner has won the acclaim of the industry. It is small, skillfully designed, well-built and low-priced. That's why 17 of the nation's set manufacturers today are specifying the TARZIAN tuner as a component for their products.

Engineering service available upon request

Sarkes Tarzian, inc.
TUNER DIVISION,
537 South Walnut Street • Bloomington, Indiana

The SARKES TARZIAN stations in Bloomington
WTTS-WTTV
5000 Watts Channel 10

Available Now! CRITICAL TV COMPONENTS

DEALERS AND SERVICEMEN—Your share of today's multi-million dollar TV replacement market is limited only by your ability to handle it. Now you can get *ferrite transformers, ferrite core yokes,* linearity controls, focus coils—the vital TV components you need—from one dependable source—General Electric! Don't wait to cash in on the biggest *new* business in television history—call your distributor today and stock the General Electric line!

RECEIVER MANUFACTURERS—Here's a way to cut production headaches and manufacturing costs! You simplify ordering and delivery when you design G-E components into your sets. Remember, too, that your sets will be serviced *in the field* because G-E distributors and dealers everywhere stock these parts. Let us review your requirements for next year's production right now. General Electric application engineers are at your service.

GENERAL ELECTRIC



MAIL COUPON FOR NEW *FREE CATALOG*

General Electric Company, Section 411
Electronics Park, Syracuse, New York

Rush me the new G-E Catalog of TV Components.

NAME_____

ADDRESS_____

CITY_____ STATE_____

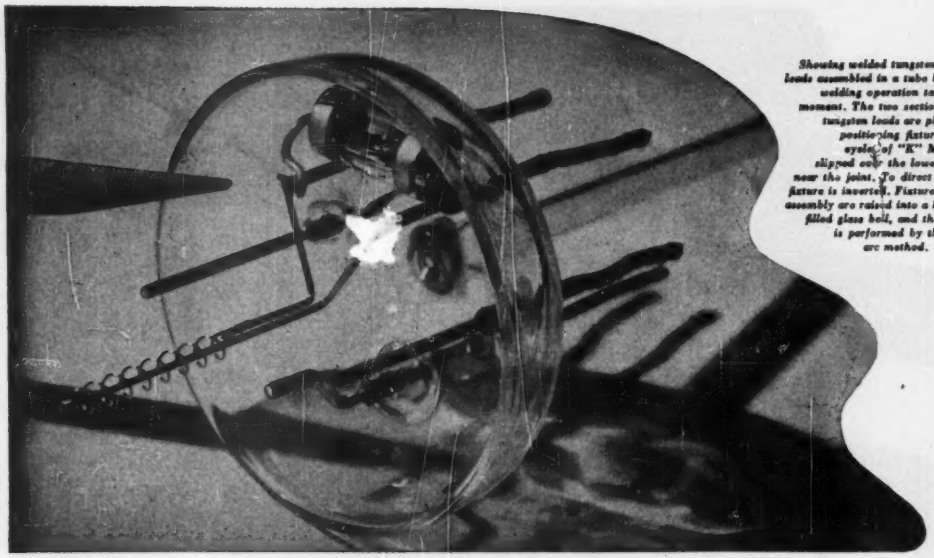

Showing welded tungsten filament leads assembled in a tube base. The welding operation takes but a moment. The two sections of the tungsten leads are placed in a positioning fixture. A tiny eyelet of "K" MONEL is slipped over the lower section, near the joint. To direct flow, the fixture is inverted. Fixture and lead assembly are raised into a hydrogen-filled glass bell, and the welding is performed by the carbon arc method.

How a problem in welding tungsten was solved



VHF beam tetrode tube, manufactured by the United Electronics Co., Newark, N. J. ▶

While improving the design of their VHF beam tetrodes, the United Electronics Company ran into a difficult technical problem.

In their tube types 5D22 and 4D21, tungsten filament leads are brought out to conventional base prongs. However, to locate the filament at the center of the structure, the two internal filament leads had to be sharply offset. It was necessary, also, that the leads be accurately aligned with the base outlet holes, to eliminate stresses which might crack the glass envelope when the tube was put in service.

Bending the tungsten leads to shape proved too inaccurate a method. So it was decided to make the leads in two sections — one straight, and one bent — welding them together in precision positioning fixtures.

This method of assembly proved satisfactory, but difficulty was immediately encountered in finding a suitable joining metal.

Several metals were tried without success. Either they failed to "wet" the tungsten, or caused it to embrittle.

Finally, United Electronics Company engineers tried "K"® MONEL—*and it proved to be the answer to their problem.*

"K" MONEL "wet" the tungsten satisfactorily; flowed well; made strong, smooth joints; was resistant to oxidation and corrosion. In addition, "K" MONEL's melting point was safely above both exhausting and tube operating temperatures.

* * *

If you have a problem in metal selection, get to know the family of INCO Nickel Alloys with their unique combination of properties. Our technical department is always ready to assist you. Write for "66 Practical Ideas for Metal Problems in Electrical Products."

The International Nickel Company, Inc.
67 Wall Street • New York 5, N.Y.

EMBLEM OF SERVICE
NICKEL INCO ALLOYS

MONEL® • "S"® MONEL • "R"® MONEL • "KR"® MONEL • NICKEL • LOW CARBON NICKEL • DURANICKEL® • INCONEL® • INCONEL "X"®

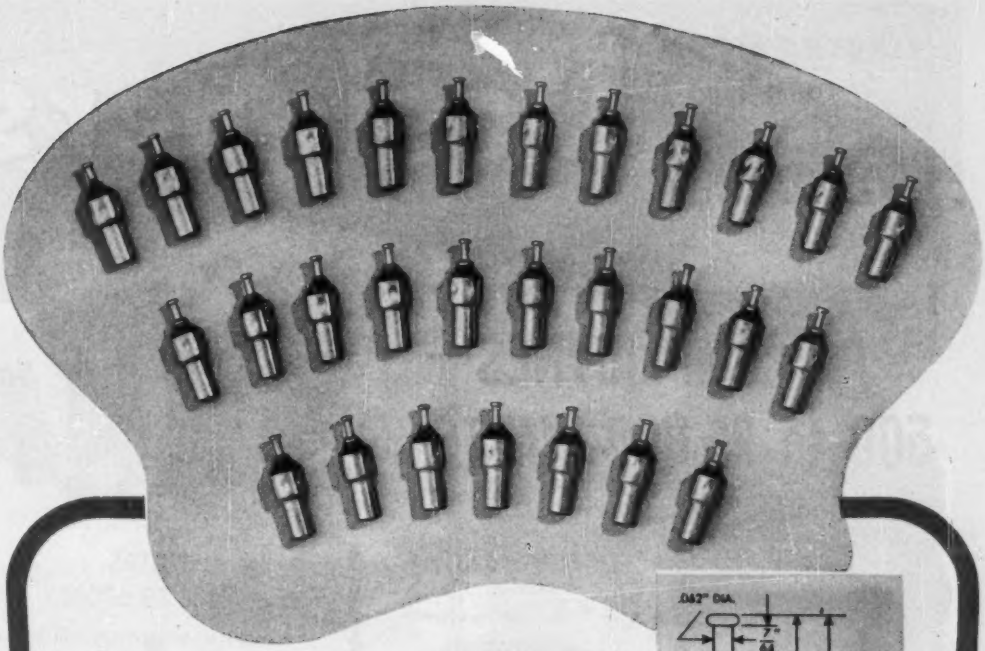

ERIE STYLE 325 . . . *A Rugged Stand-Off . . . Quickly Installed . . . Makes a Neater Chassis . . . Provides Uniform, Efficient By-passing*

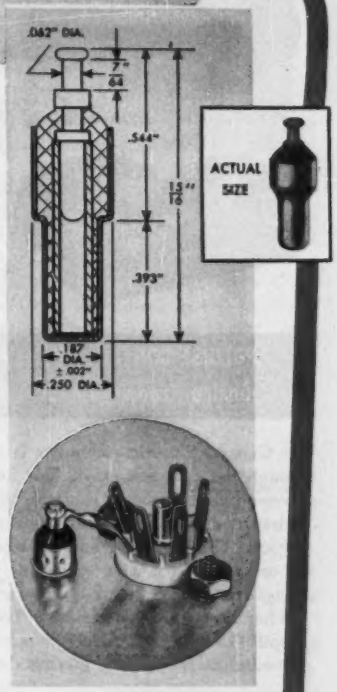

Manufacturers of TV and other high frequency receivers have welcomed the Erie Type 325 Ceramicon because its distinctive features give the answer to many production problems. Consider these advantages:

1 For the first time in a hermetically sealed case, a by-pass to ground is provided through the shortest possible path, by taking advantage of the concentric cylindrical electrode configuration and making connection to the outer shell at the plane of the chassis.
2 The design provides extremely low and uniform series inductance and effective v.h.f. by-pass.
3 In assembly operations terminals and lead lengths are fixed, resulting in better mechanical uniformity.
4 High speed assembly is facilitated through use of a standard push-on clip. For more critical applications shell may be soldered directly into a hole in the chassis.
5 Post terminal matches tube socket terminal height to maintain uniform short leads, and provides a sturdy tie point for several connections.
6 Unusual mechanical ruggedness minimizes danger of breakage in installation and in use.

Available in 10, 33, 47, 68, 82, 100, 680, 1,000 and 1,500 MMF capacity. 500 Volts D. C. working.

Electronics Division

ERIE RESISTOR CORP., ERIE, PA.

LONDON, ENGLAND · · TORONTO, CANADA

ELECTRONICS

Designers

AMPLIDYNES— 500 to 25,000 WATTS



▲ 1-kw Amplidyne motor-generator set.

▼ 5-kw Amplidyne generator



◀ 3-kw Amplidyne motor-generator set

PRECISE CONTROL OF position · torque · speed
tension · power factor · voltage · current

The General Electric amplidyne is a simple d-c generator which, through the arrangement of field and armature circuits, possesses extremely high speed of response and amplification.

First used in radar and fire-control apparatus, it now has many new jobs. That's why G-E amplidyne generators and motor-generator sets are made in a wide variety of sizes and frames with output ratings from 500 watts to 25 kilowatts.

What are your requirements? For further data, write, giving complete details, to *Electrical Industries Sec., Resale Industries Div., Apparatus Dept., General Electric Co., Schenectady 5, N. Y.*

A G-E 25-KW AMPLIDYNE AMPLIFIES A 9/10 WATT INPUT 22,200 TIMES



PULSES —MADE TO ORDER

Specially designed General Electric Type-E networks will generate pulses within ±5 per cent of any length you require from 0.1 to 40 microseconds. These networks consist of capacitor and coil sections adjusted to close tolerances and hermetically sealed in single metal containers. In the last war G-E Type-E networks were produced on a large scale to meet radar demands. Now they are available for commercial or military use in a wide variety of designs, impedances, ratings, and sizes. See Bulletin GEA-4996.



Typical design and operational limits of G E Type-E pulse-forming network: Ripple at top of pulse ±5%; Wave length ±5% measured at 70% amplitude; Capacitance tolerance ±10%

GENERAL ELECTRIC

Digest

TIMELY HIGHLIGHTS ON G-E COMPONENTS



OIL-IMMERSED SELENIUM RECTIFIERS —use them "ANYWHERE"!

G-E hermetically sealed, oil-immersed selenium rectifier stacks make it possible for you to design metallic rectifiers into equipment that will be subjected to corrosive fumes, salt air, dust, fungus, or other atmospheric conditions. Because they're immersed in oil, these stacks will stand higher current drains than equivalent-size "open" units. Available in single- or full-wave circuits. Ratings: from 12 to 180 d-c volts output, 15.5 to 270 a-c volts input, .25 to 27.0 d-c amps. Write for complete data on ratings and dimensions to *Electrical Industries Section, Resale Industries Division, Apparatus Dept., General Electric Co., Schenectady 5, N. Y.*

PUSH-BUTTON STATIONS—make your selection from the COMPLETE G-E LINE

There's a General Electric push-button station or unit for virtually any electronic application. The complete line includes dozens of types. All stations have sturdy nonbreakable steel frames and covers with ample clearance between terminals. G-E units for built-in applications have terminals anchored to a molded base for firm support. Contact maintenance on all stations and units is virtually unnecessary because large fine-silver double-break contacts are used. For full data, check Bulletin GEA-3469.

NEW! SHADOW-PROOF DIALS MAKE SWITCHBOARD INSTRUMENTS EASIER-TO-READ

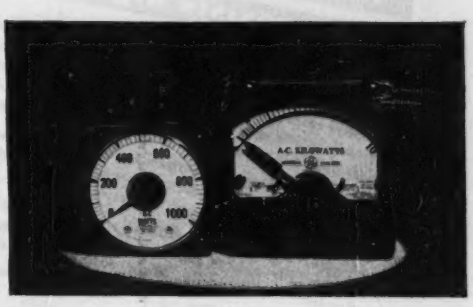

Here is a new switchboard instrument that can be read easily—anytime. Its dial can be clearly illuminated from almost any angle because it is set forward flush with the front of the case. A protruding anti-glare convex-type glass front prevents reflections. The new meter is available in 4¼- or 8¾-inch models, both with long 250-degree scales. D-c ammeters, volt-ammeters; a-c ammeters, voltmeters, wattmeters, frequency and power-factor meters, temperature indicators, and synchroscopes. Send for Bulletin GEC-218.

General Electric Company, Section 667-10
Apparatus Department, Schenectady 5, N. Y.

Please send me the following bulletins:

(V) Indicate for reference only
(X) for planning an immediate project

- ☐ GEA-3469 Push-button stations
- ☐ GEA-4996 Pulse-forming networks
- ☐ GEC-218 Switchboard instruments

Name_____

Company_____

Address_____

City_____ State_____

flexite

APPROVED
by the
UNDERWRITERS LABORATORIES
under their reexamination service

the flexible, extruded plastic tubing that resists high temperatures ABOVE 105° C

YES, FLEXITE is the electrical insulation tubing that sets new standards for resistance to extreme high temperatures. Compounded of a plasticized copolymer of vinyl chloride and vinyl acetate and manufactured with a true wall thickness, smooth inside and outside, FLEXITE PLASTIC TUBINGS offer the greatest resistance to high and low temperatures, are extremely flexible and have great tensile strength.

FLEXITE compares more than favorably with tubings of similar nature. Check the specifications of FLEXITE, compare them with the requirements for your products and against other insulations for identical use . . .

YES, you will find that FLEXITE sets a new high standard for protection against high temperatures, high dielectric, stretching, tearing, abrasion, exposure to acids, oils and alkalies, flammability, etc. — samples and additional information will be sent upon request.

And for a Plastic Tubing to Withstand Normal High Temperatures Mitchell-Rand Offers Flexite-Norm . . . write for specifications.

Flexite	physical & electrical properties		
a. tensile strength, minimum average	2500 PSI	Colors	Black, white, red, green, yellow and blue are standard colors.
b. ultimate elongation, min. average	300%	Dimensions and Tolerances	Standard sizes to fit B & S wires #20 to #0 inclusive, as specified by ASTM Spec. D922-47T.
c. dielectric strength, minimum	800 v/mil	Wall Thickness	In accordance with ASTM Spec. D922-47T, as follows: #20 — #10 incl. — .016" ± .003" # 9 — # 0 incl. — .020" ± .003"
d. flammability	non-inflammable	Standard Lengths	Standard 36" lengths or continuous lengths in coils. Sizes #20 — #10 incl., will be supplied on paperboard spools when so ordered.
e. heat resistance	After 100 hrs. at 300° F. the tubing is not brittle and when flexed does not crack.	Quality	Uniform in quality and condition, smooth on both inside and outside, free of defects such as pin-holes, blisters, foreign inclusions and other imperfections.
f. heat endurance	Recommended for continuous operating temperatures up to 105° C., and when baked at 125° C. for 2,000 hours does not become brittle.	Test Methods	Properties enumerated in above specifications shall be determined according to Tentative Methods of Testing Non-rigid Polyvinyl Tubing, American Society for Testing Materials, Designation D876-46T.
g. low temperature flexibility	—30° C.		
h. heat shrinkage	ASTM Standards #20 — #17 incl. — less than 8% #16 — # 6 incl. — less than 5% # 5 and larger — less than 3%		
i. oil resistance	Highly resistant to effects of transformer and lubricating oils, does not stiffen when continuously exposed to them.		

WHATEVER YOUR ELECTRICAL INSULATION PROBLEM MITCHELL-RAND HAS THE ANSWER

And for a Plastic Tubing to Withstand Normal High Temperatures • Mitchell-Rand Offers • Flexite-Norm • write for specifications.

MITCHELL-RAND INSULATION CO. Inc.
51 MURRAY STREET • CORTLANDT 7-0310 • NEW YORK 7, N. Y.

A PARTIAL LIST OF M-R PRODUCTS: FIBERGLAS VARNISHED TUBING, TAPE AND CLOTH • INSULATING PAPERS AND TWINES • CABLE FILLING AND POTHEAD COMPOUNDS • FRICTION TAPE AND SPLICE • TRANSFORMER COMPOUNDS • FIBERGLAS SATURATED SLEEVING • ASBESTOS SLEEVING AND TAPE • VARNISHED CAMBRIC CLOTH AND TAPE • MICA PLATE, TAPE, PAPER, CLOTH, TUBING • FIBERGLAS BRAIDED SLEEVING • COTTON TAPES, WEBBINGS AND SLEEVINGS • IMPREGNATED VARNISH TUBING • INSULATED VARNISHES OF ALL TYPES • EXTRUDED PLASTIC TUBING

America's Road to Victory

. . . Let's Increase Production

This is the time to speak out—now—at the beginning.

Our industrial program for re-armament is getting off on the wrong foot.

The talking and writing about it emphasize the wrong things.

Its headline words are "cuts" and "controls."

Those words make bad propaganda for the cold war.

"Cuts" and "controls" are no words to challenge the imagination and energy of our own people. They won't impress the masters of the Kremlin. And they can only make it appear to the rest of the world that America thinks it can defend the free way of life by abandoning it.

America stands as the world's champion against aggression because America has become the most powerful free nation in the world.

How did we get that way?

Not by putting ceilings on wages; not by rationing or clamping iron-clad government controls all over business and industry.

To be sure, some temporary controls are necessary to channel very scarce materials speedily to use for defense. So, too, are special taxes and credit restrictions needed to combat inflation. But they will be fatal if they blind us to this fact:

We became the strongest nation in the world by out-producing every other nation.

Production—The Final Answer

Next year our government is planning at least a $40 billion military program. Instead of planning only on controls to divert $40 billion of production from the making of civilian goods to the making of military supplies, we should be figuring out also ways to push up total production.

Of course, our industrial plant is running at close to "capacity" now. And our labor force has reached almost full employment. There isn't much slack to be taken up.

Can even the United States add a $40 billion miracle of production on top of what it is already doing?

Our answer is "Yes"—and within two years. It can be done by adding about $6 billion each year to our program of capital investment which now runs about $22 billion a year.

Part of this added production will come from expanding our industries. The steel companies, for example, already have plans to increase their capacity almost ten per cent in the next two years.

But by far the largest part of that $40 billion of added production must come from higher productivity—raising industry's efficiency.

continued on next page

To meet our goals we need to raise our productivity five per cent a year.

Can it be done?

The answer is an emphatic "Yes."

Raise Industry's Productivity

McGraw-Hill's studies of industry's equipment show that there are countless opportunities for improving efficiency. Our manufacturing industries alone need at least $35 billion of new equipment to raise their facilities to first class technical standards.

Here are some of the broad possibilities reported by the trained editors of McGraw-Hill's business magazines:

In many manufacturing plants as much as 40 per cent of workers' time goes into moving materials and parts—shifting things about within the plant between processes and to and from shipping platforms.

FACTORY estimates that improved materials handling equipment and methods might well cut handling costs twenty-five per cent and save annually over 650,000 man-years of unnecessary labor.

Modern machine tools designed since World War II are 40 per cent more productive, on the average, than is old equipment. But AMERICAN MACHINIST surveys show that 95 per cent of industry's machine tools are of designs at least ten years old. Replacing them could raise productivity of the metalworking industries at least ten per cent—enough to absorb a major share of the metalworking industries' part of the defense program as now planned.

In coal mining, latest equipment and methods can raise productivity sharply. The editors of COAL AGE estimate that production of bituminous coal could be raised from seven tons per man-shift to ten within three to five years.

Many new textile production techniques are 50 per cent to 75 per cent more efficient than those in use now. If plants could be fully modernized, and full use made of latest management methods, TEXTILE WORLD estimates that output-per-manhour would rise 20 per cent. *A FOOD INDUSTRIES study indicates that modern equipment plus the best management techniques could raise productivity in food processing at least 20 per cent.*

These are just some of the opportunities that industry can seize and by which the nation can profit.

A Nation-Wide Effort

Of course, industry itself can't do the whole job. Labor, government and all the rest of us must cooperate.

Government's part is to see that its emergency controls are so applied that they will increase productivity and thus make possible an early lifting of such controls.

Labor's part is to help in the development of labor-saving methods and machinery and to welcome their adoption as the only sure way of continuing to advance the American standard of living while maintaining the American free way of life.

For all of us the job is to work constantly for an expanding, ever-stronger America with constantly growing productivity; not a pinched and shackled America cooped up under wage and price ceilings and tied to a ration card.

Challenge to Industry

Here is a sharp challenge to industry to study the best work-methods that are being reported—to use every minute and every dollar it can to replace obsolete equipment.

Here is a sharp challenge to government to do everything within its power to make its control policies and its fiscal policies strengthen the incentives to industrial modernization—to demand sacrifice for a purpose and not for effect.

The job to which such opportunities point will take time—though nothing holds back adoption of some of the simpler improvements in work-methods reported in business magazines all the time.

But increasing production is our one best hope that we may be spared the full array of price, wage and production controls now and be freed eventually from all controls.

General Omar Bradley has said that the protection of our national independence calls for "long-range commitments that we are willing to carry out."

A long-range commitment to fight this battle for peace with America's most powerful weapon—industrial productivity—is the surest guarantee of victory for the free world.

Let's make that commitment—now—at the beginning.

McGraw-Hill Publishing Co., Inc.

COMPLETE, WIDE-BAND INSTRUMENTATION FOR DISTORTION-FREE, FAST-PULSE MEASUREMENT!

New –hp– 460B Fast-Pulse Amplifier

–hp– 46A Connectors and Accessories

–hp– 460A Wide-Band Amplifier

UP TO 90 DB GAIN IN CASCADE! AMPLIFIES MILLI-MICROSECOND PULSES! RISE TIME .0026 μSEC! 125-VOLT OPEN-CIRCUIT OUTPUT! GIVES OVER 100 MC BANDWIDTH TO YOUR STANDARD OSCILLOSCOPE!

SPECIFICATIONS

–hp– 460B PAST PULSE AMPLIFIER

FREQUENCY RESPONSE: Closely matches Gaussian curve. Hf 3 db point is approx. 140 mc. Lf 3 db point is approx. 50 kc into 200-ohm load.
MAXIMUM OUTPUT VOLTAGE: High bias, approx. 125 v. negative open circuit. Normal bias (linear amplification) approx. 8 v. peak into 200-ohm load or 16 v. peak open circuit, pos. or neg. pulses.
GAIN: Approx. 15 db into 200-ohm load.
INPUT IMPEDANCE: Approx. 200 ohms.
RISE TIME: Approx. 0.0026 μsec.
DELAY: Approx. 0.016 μsec.
DUTY CYCLE: 0.10 max. for 125 v. output pulse.
LINEARITY PULSE OPERATION: See Figure 1.
MOUNTING: Relay rack. 5¼" x 19". 6" deep.
POWER SUPPLY: 115 v. 50/60 cps. 35 watts.
PRICE: $225.00 f.o.b. factory.

–hp– 460A WIDE-BAND AMPLIFIER

(Specifications same as Model 460B except:)
MAXIMUM OUTPUT VOLTAGE: Approx. 8 v. peak open circuit; 4.75 v. peak into 200-ohm load.
GAIN: Approx. 20 db with 200-ohm load.
DELAY: Approx. 0.012 μsec.
PRICE: $185.00 f.o.b. factory.

–hp– 46A ACCESSORIES

–hp– 46A-16A PATCH CORD – 200-ohms, 2' long. $18.50.
–hp– 46A-16B PATCH CORD – 200-ohms, 6' long. $25.50.
–hp– 46A-95A PANEL JACK—For 200-ohm cables, low capacitance. 1⅛" dia. $7.50.
–hp– 46A-95B CABLE PLUG—For 200-ohm cables, low capacitance. $7.50.
–hp– 812-52 CABLE—200-ohm cable in lengths to specification. Per foot $1.75.
–hp– 46A-95C 50-OHM ADAPTOR – Type N connector for coupling 50-ohm line into –hp– amplifiers. $15.00.
–hp– 46A-95D ADAPTOR—Bayonet sleeve for connecting –hp– 410A VTVM to output of 460A/B amplifiers. $15.00.
–hp– 46A-95E CONNECTOR SLEEVE—Joins two 46A-95B CABLE PLUGS. $7.50.
–hp– 46A-95F ADAPTOR—For connecting to 5XP CRT. $10.00.
–hp– 46A-95G ADAPTOR—For connecting to Tektronix type 511 oscilloscope. $12.50.

Data subject to change without notice.

Here at last is complete instrumentation for true amplification of fast pulses at high power levels sufficient to operate scalers or counting meters, cathode ray tubes, or to give more than 100 mc band-width to your present oscilloscope. New –*hp*– 460B Fast-Pulse Amplifiers, in cascade with –*hp*– 460A Wide-Band Amplifiers, amplify up to 125 volts, open circuit (limited duty cycle). This permits full deflection of 5XP cathode ray tubes, or 2-inch deflection of 5CP tubes. Ultra-short rise time of 0.0026 μsec, combined with zero overshoot, insures distortion-free amplification of pulses faster than 0.01 μsec.

New –*hp*– 460B Amplifier, cascaded with –*hp*– 460A provides linear amplification of 16 volts peak output and pulse amplification of 125 volts output (slight non-linearity). This combination provides maximum usefulness in fast-pulse study for nuclear radiation work, television or VHF research; for increasing frequency range of your oscilloscope, or general wide-band laboratory amplification. In addition to the above instrumentation, –*hp*– also offers series 46A accessories—a complete set of 200 ohm cables, adapters and fittings for inter-connecting amplifiers or patching to oscilloscopes.



Fig. 1: Linearity of –hp– 460B Fast-Pulse Amplifier

Fig. 2: (a) 0.01 μsec pulse through –hp– 460B Amplifier (b) 0.02 μsec pulse through 3 amplifiers in cascade

Get complete details. Write direct or see your –hp– sales representative.

HEWLETT-PACKARD COMPANY
2177A Page Mill Road • Palo Alto, California, U.S.A.
Sales Representatives in all principal cities.
Export: Frazar & Hansen, Ltd., San Francisco, New York, Los Angeles

HEWLETT-PACKARD hp INSTRUMENTS

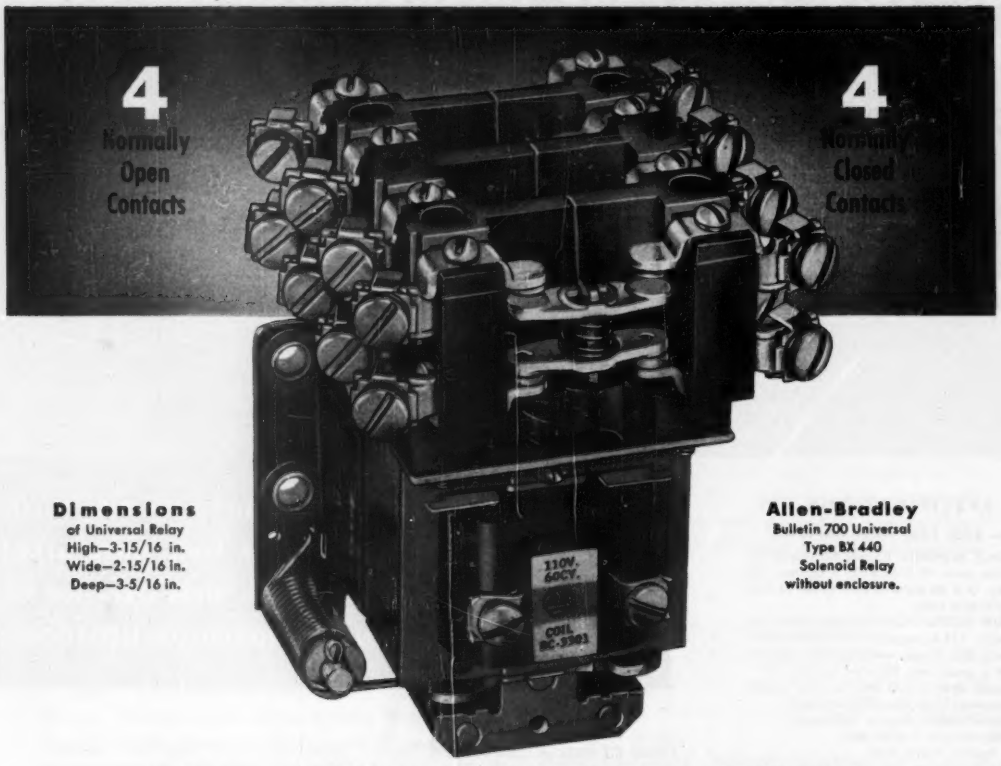

Dimensions
of Universal Relay
High—3-15/16 in.
Wide—2-15/16 in.
Deep—3-5/16 in.

Allen-Bradley
Bulletin 700 Universal
Type BX 440
Solenoid Relay
without enclosure.

These SMALL UNIVERSAL RELAYS

are instantly adaptable for switching a wide variety of power supply circuits

There are literally thousands of places for these small, dependable solenoid relays in electronic power circuits. These Bulletin 700 relays are built in an amazing variety of contact arrangements . . . normally open and normally closed . . . from one to eight poles. Enclosures are available for almost any service requirement.

• The Type BX 440 Universal Solenoid Relay has four normally open and four normally closed contacts which may be used interchangeably for handling a wide variety of circuit arrangements.

It will pay you to get a full listing of Allen-Bradley Bulletin 700 A-C Relays. And for heavier currents, Allen-Bradley solenoid contactors are available up to 900 amperes . . . with or without enclosures. Investigate the Allen-Bradley line.

Allen-Bradley Co., 110 W. Greenfield Ave., Milwaukee 4, Wis.



Allen-Bradley Relay in general purpose enclosure.

A-B

ALLEN-BRADLEY

RELAYS • RESISTORS

QUALITY

Bulletin 702 Solenoid Contactor—50 ampere rating.

for edge to edge sharpness...

the New Du Mont Bent-Gun

the latest refinement in the most copied gun structure

Uniform sharpness of trace to the very edges of the screen distinguishes the new Du Mont Bent-Gun.

A higher degree of pre-focusing passes a smaller-diameter beam through the deflection field. Spot distortion is reduced and a uniform overall focus results. Other design changes are: Improved bulb spacer insures proper anode contact and electron gun centering; rounded corners on pertinent gun parts eliminates stray emission at higher anode voltages; new grid-cathode assembly allows a longer G-2 (second grid) without increasing overall length.

This new Du Mont Bent-Gun is now being incorporated in ALL Du Mont Teletrons. Therefore, whether planning a new TV receiver or modifying an old one, be sure to include the Du Mont Teletron for the best in TV pictures. Simply specify DU MONT.

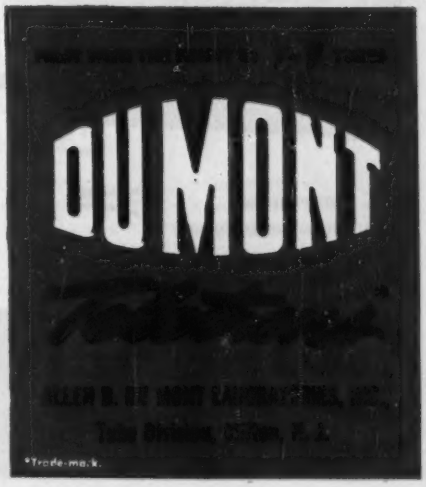

SIGNAL GENERATORS by ARC

AIRCRAFT RADIO CORPORATION

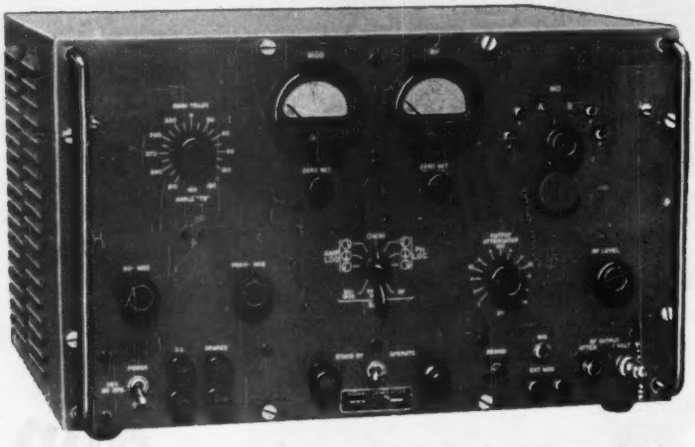

TYPE H-14

108-118 MEGACYCLES

Tests OMNI Receiving Units in Aircraft or on the Bench

Checks on:

- 24 Omni courses
- Left-center-right on Phase-localizer
- Left-center-right on Amplitude-localizer
- Omni course sensitivity
- To-From and Flag-alarm operation
- All necessary quantitative bench tests



The Type H-14 Signal Generator, 108-118 megacycles, provides a standard signal source for the complete testing of VHF airborne omnirange and localizer receivers in aircraft or on the bench. It provides for testing 24 omni courses, plus left-center-right checks on both amplitude and phase localizers. Aircraft may be checked out quickly and accurately just before take-off. RF output for ramp checks, 1 volt into 52 ohm line and for bench checks, 0-10,000 microvolts. Provision for external voice or other modulation. AF output available for bench maintenance and trouble shooting.

Price: $885.00 net, f.o.b. Boonton, N. J.



TYPE H-10—Microwave Test Set; 23,500-24,500 Megacycles

Provides source of cw or pulse frequency-modulated RF, power level −37 to −90 dbm. RF power meter measures levels from +7 to +30 dbm. Frequency meter for measuring output or input RF accurate to better than 20 mc. Primary purpose of the H-10 is to measure receiver sensitivity, bandwidth, frequency, recovery time, and overload characteristics, plus transmitter power and frequency. Recommended as a standard source of RF for research or production testing. Equal to military TS-223/AP.

Price: $1692.00 net, f.o.b. Boonton, N. J.

TYPE H-12—VHF Signal Generator; 900-2100 Megacycles

Provides source of cw or pulse amplitude-modulated RF, power level 0 to −120 dbm. Internal pulse circuits with controls for width, delay, and rate, and provision for external pulsing. Single dial tuning, frequency calibration accurate to better than 1%. Built to Navy specifications for research and production testing. Equal to military TS-419/U.

Price: $1950.00 net, f.o.b. Boonton, N. J.

ARC Communication and Navigation Equipment

Aircraft Radio Corporation also manufactures LF and VHF airborne communication and navigation equipments—all CAA-Type-Certificated for scheduled air-carrier use or for those whose type of flying requires a high degree of reliability and performance. Equipment consists of light, small units which can be combined to provide the required operation, whether it be the 1 Receiver/1 Transmitter (15 pound) installation in a 2-place helicopter, or a 3 Receiver/2 Transmitter/ VHF Omni installation (70 pounds) in larger 2-engine aircraft.

WRITE TODAY for descriptive literature on A.R.C. Signal Generators or airborne LF and VHF communication and navigation equipments, CAA Type Certificated for transport or private use.

Aircraft Radio Corporation

Boonton, N. J.

Dependable Electronic Equipment Since 1928

It's a fact that

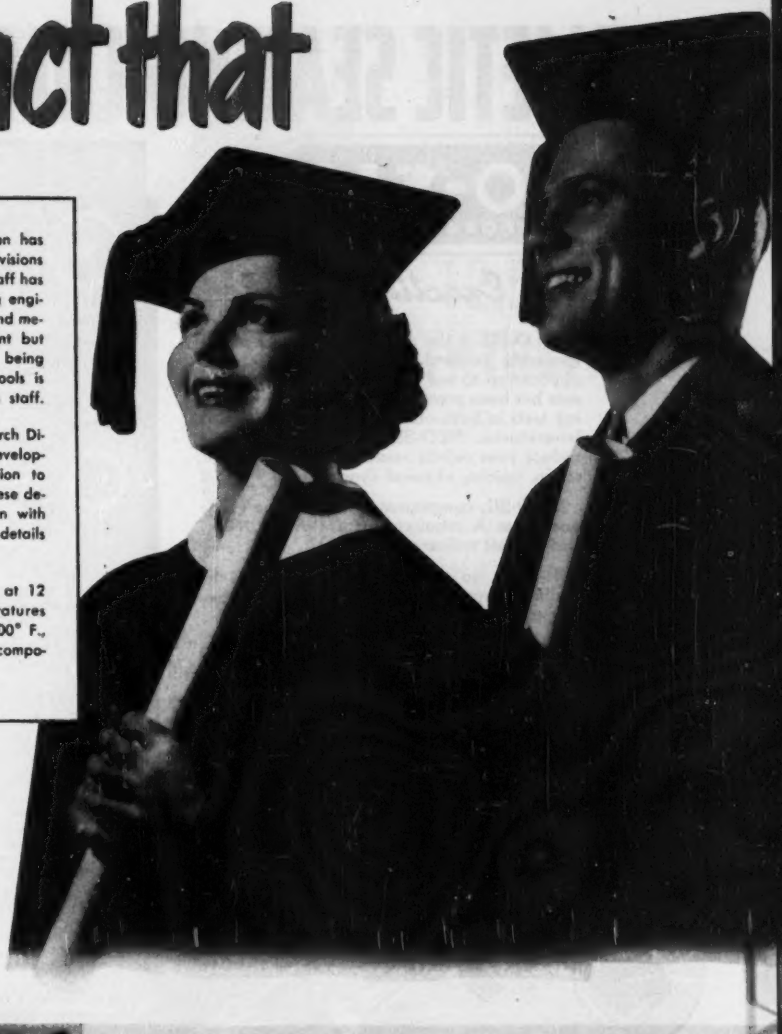

- The American Lava Corporation has one of the best equipped Research Divisions in the industry. The American Lava Staff has graduate engineers from all leading engineering schools. Ceramic, electrical and mechanical engineers are preponderant but every engineering degree currently being awarded by U. S. Engineering Schools is held by one or more men on this staff.

- Almost every month, the Research Division successfully completes the development of a new AlSiMag composition to comply with special requirements. These developments are in close cooperation with the customer. When requested, all details are kept confidential.

- Continuous operation of kilns at 12 different temperatures, at temperatures ranging from 1400° F. to above 3000° F., permits the firing of each AlSiMag composition at its optimum temperature.

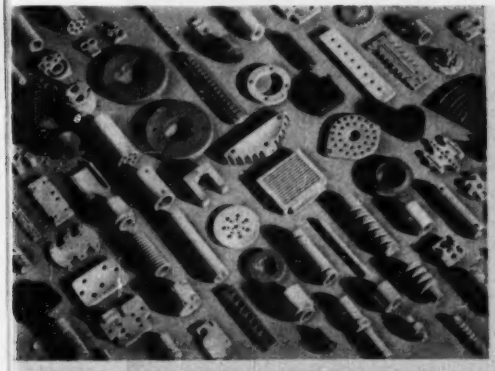

ALSIMAG

TRADE MARK REGISTERED U.S. PATENT OFFICE

At American Lava Corporation, you are most apt to find the answer to any question involving technical ceramics. American Lava Corporation is composed of MEN who give intelligent, sympathetic consideration to customer problems—backed by specialized experience gained in 49 years of concentrating entirely on custom made technical ceramics. The knowledge of these men is available to you on request. If requested, all customers' information is kept strictly confidential.

AMERICAN LAVA CORPORATION

49TH YEAR OF CERAMIC LEADERSHIP

CHATTANOOGA 5, TENNESSEE

OFFICES: METROPOLITAN AREA, 671 Broad St., Newark, N. J., Mitchell 2-8159 • CHICAGO, 228 North LaSalle St., Central 6-1721
PHILADELPHIA, 1649 North Broad St., Stevenson 4-2823 • LOS ANGELES, 232 South Hill St., Mutual 9076
NEW ENGLAND, 38-B Brattle St., Cambridge, Mass., Kirkland 7-4498 • ST. LOUIS, 1123 Washington Ave., Garfield 4939

HERMETIC SEALING COMPONENTS

NEO-SIL CORPORATION

Welcomes Exacting Demands

NEO-SIL is the result of ten years of engineering research and development. Its application to our hermetic sealing components has been proven under severe and exacting tests in both our own and our customers laboratories. NEO-SIL components will help reduce your rejects resulting from breakage, strain, cracks, physical shock, etc.

NEO-SIL components will pass the grade one, class A requirements for Army, Navy and aircraft military equipment.

It costs no more to use these hermetic sealing components and their use will save you money.

For performance, quality and economy—specify NEO-SIL hermetic sealing components. Manufactured by NEO-SIL Corporation—to meet the most exacting performance demands.

SPECIALTY PRODUCTS

1 Molded Cables With Plugs Attached
2 Female 4 Pin Panel Connector
3 Meter Hermetic Seal Gasket
4 Panel Type Hermetic Seal Fuse Holder
5 5 Pin Female Panel Connector
6 Rotary Hermetically Sealing Panel Bushing

The above items are all pressure checked at 25 pounds per square inch.

The materials and processes used in the manufacture of all sealed components are made to conform to the most rigid JAN specifications.

Your special problems are solicited.

NEO-SIL CORPORATION

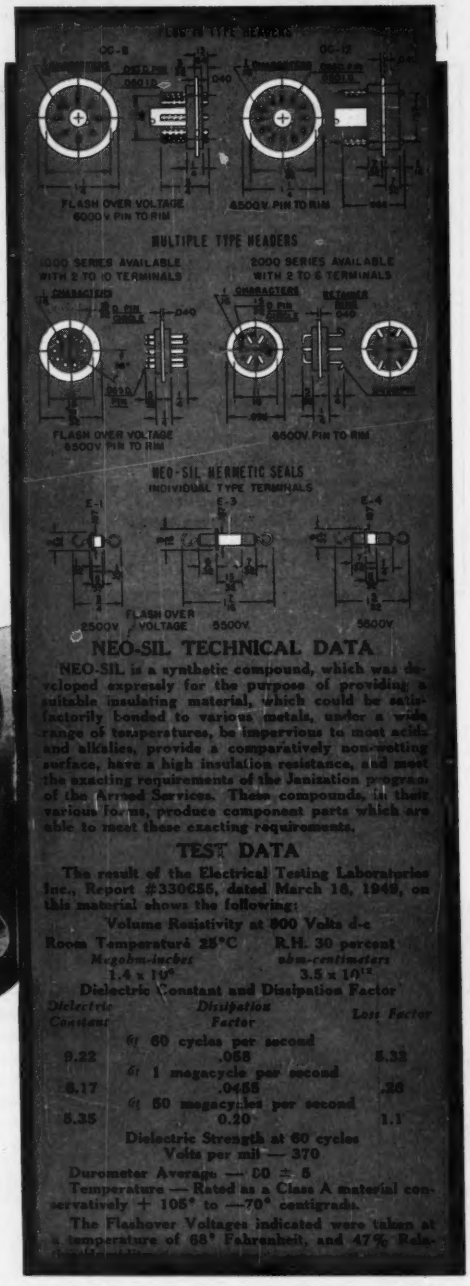

NEO-SIL TECHNICAL DATA

NEO-SIL is a synthetic compound, which was developed expressly for the purpose of providing a suitable insulating material, which could be satisfactorily bonded to various metals, under a wide range of temperatures, be impervious to most acids and alkalies, provide a comparatively non-wetting surface, have a high insulation resistance, and meet the exacting requirements of the Janization program of the Armed Services. These compounds, in their various forms, produce component parts which are able to meet these exacting requirements.

TEST DATA

The result of the Electrical Testing Laboratories Inc., Report #330655, dated March 16, 1949, on this material shows the following:

Volume Resistivity at 900 Volts d-c
Room Temperature 25°C R.H. 30 percent

Megohm-inches	*ohm-centimeters*
1.4×10^{6}	3.5×10^{15}

Dielectric Constant and Dissipation Factor

Dielectric Constant	*Dissipation Factor*	*Loss Factor*
@ 60 cycles per second		
9.22	.058	5.33
@ 1 megacycle per second		
6.17	.0455	.28
@ 50 megacycles per second		
5.35	0.20	1.1

Dielectric Strength at 60 cycles
Volts per mil — 370

Durometer Average — 80 ± 5
Temperature — Rated as a Class A material conservatively + 105° to —70° centigrade.

The Flashover Voltages indicated were taken at a temperature of 68° Fahrenheit, and 47% Rela-

26 CORNELISON AVE., JERSEY CITY 4, N. J.

12.5-AMP THYRATRON

General Electric's GL-5855 is designed for control work that requires high current capacity . . . toughness and stamina . . . utmost dependability.

HERE'S a new motor-control tube that handles big currents, and can take the punishment of full-time, heavy-duty operation . . . on through a long life span which squeezes value out of every dollar.

Study the clean, sturdy design. Under the heavy glass envelope is a structure so simple, so inherently braced, that vibration and shocks have little effect. Bolts fasten the tube to the panel, assuring firm support and providing tight, solid electrical contacts.

Cleanness and simplicity go further . . . right through to application needs. No snubber circuit is required. The high commutation factor (200) means that the anode gas absorption from inductive loads is negligible. This makes for long tube life with a straightforward, economical circuit.

To a husky 12.5-amp rating are added high anode voltage, high peak-to-average current ratio, stable control characteristics, and short heating time. This pattern has made the earlier, smaller GL-5544 and GL-5545 popular; assures enthusiastic acceptance for the new thyratron. Also, the GL-5855 has a wide temperature range, making the tube virtually climate-proof.

Wire or write for complete ratings and performance data. Or better, ask for an across-your-desk talk with an experienced G-E tube engineer! *Electronics Department, General Electric Company, Schenectady 5, N. Y.*

GL-5855

12.5-amp control thyratron

Filament voltage	2.5 v
Filament current	34 amp
Peak anode voltage, forward and inverse	1,500 v
Peak cathode current	150 amp
Avg cathode current	12.5 amp
Current averaging time	15 sec
Ambient temp range	−55 to +70 c
Commutation factor	200

* * *

NOTE—Commutation factor is the product of the rate of current decay in amperes-per-microsecond just prior to commutation and the rate of inverse voltage rise in volts-per-microsecond just after commutation.

GENERAL ELECTRIC

190-51

Looking for trouble before it starts...

with an MB VIBRATION EXCITER

One of the many instruments produced by the Sperry Gyroscope Company is here undergoing a "shake test" on the MB model S-3 Vibration Exciter. Such vibration testing contributes to the dependability in service for which Sperry instruments are noted. The instrument is fastened to the shake table of the exciter, which is controlled from panel. Amplitude, velocity and acceleration are being read directly on an MB Vibration Meter.

WHEN PRODUCTS GIVE unexpected trouble in service, you'll find too often that it's due to vibration.

Foresighted concerns take no chances with this enemy of equipment life. At Sperry Gyroscope Company, possible troubles due to vibration are ferreted out in the laboratory. By means of an MB Vibration Exciter, which has quick, easy adjustments for force and frequency, instruments are checked for vibratory response—for ability to resist fatigue. Result: Trouble is eliminated in the design stage, *before* it starts.

This shaker is adaptable to countless situations. You can test miniature electrical assemblies to mammoth wing structures; filaments to heavy axle shafts. In one of its jobs—fatigue testing—the shaker reproduces vibratory effect of years within hours. One company, for example, reduced the time of spot-checking bellows to 10 minutes—a job which formerly took 12 hours per unit!

Location of noise sources . . . actual observation of the motions of vibrations . . . study of damping characteristics of materials . . . these are but a few other important jobs where an MB Exciter pays off.

Models which deliver forces of 5, 25, 50, 100, 200, 300 pounds and higher are now available—all electromagnetic. We'd like to explain the technique of their use in detail, show you how to use one on your own problems. Write us without obligation.



The Model 53 Vibration Exciter illustrated delivers peak force of 200 pounds. Operates in frequency range of 3 to 500 C.P.S. Has rotating power supply.

Write us for more detailed information on MB Vibration Exciters, and ask for bulletin 410 M5.

THE MB MANUFACTURING COMPANY, Inc.

1060 State Street, New Haven 11, Conn.

PRODUCTS AND EQUIPMENT TO CONTROL VIBRATION . . . TO MEASURE IT . . . TO REPRODUCE IT

Most Trusted Name in Picture Tubes...

Only Zetka utilizes the power-tube method of producing picture tubes. This means custom-processing, long pumping, set-testing. Zetka tubes are superior, more sharply focused, safe. Rectangulars and rounds in 16", 17", 19" and 20".

zetka

zetka TELEVISION TUBES, INC. 131-137 GETTY AVE. • CLIFTON, N. J.

For 37 years, Zetka has been a respected name in the radio and television industry.

MYCALEX

MINIATURE TUBE SOCKETS

7-PIN and 9-PIN . . . and SUBMINIATURES

PREMIUM INSULATION PRICED COMPETITIVELY

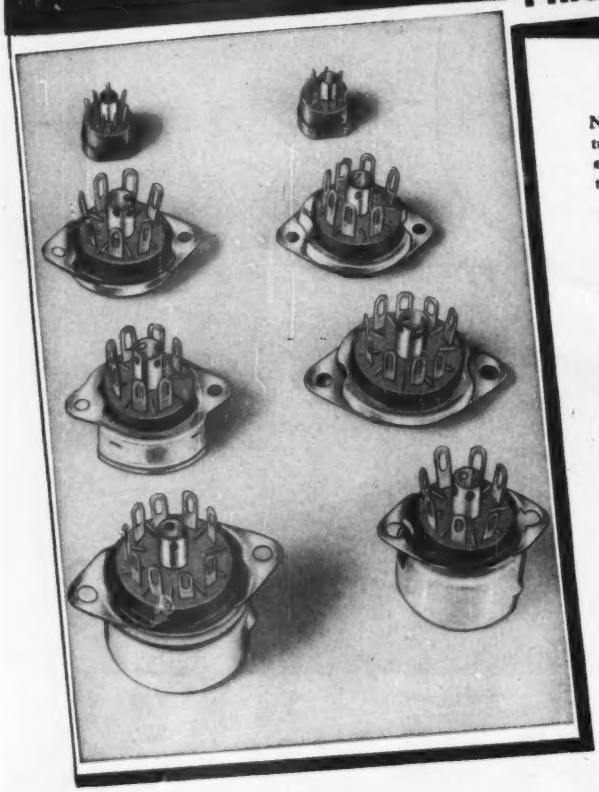

Now MYCALEX offers both 7-pin and 9-pin miniature tube sockets . . . with superior low loss insulating properties, *at new low prices* that offer ceramic quality for the cost of phenolics.

MYCALEX miniature tube sockets are injection molded with precision that affords uniformity and extremely close tolerances. MYCALEX insulation has high dielectric strength, very low dielectric loss, high arc resistance and great dimensional stability.

Produced in two grades: MYCALEX 410 conforms to Grade L4 specifications, having a loss factor of only .015 at 1 MC. It is priced comparably with mica filled phenolics.

MYCALEX 410X is for applications where low cost of parts is vital. It has a loss factor only one-fourth that of "everyday" quality insulating materials, and a cost no greater.

Prices gladly quoted on your specific requirements. Samples and data sheets by return mail. Our engineers will cooperate in solving your problems of design and cost.

Mycalex Tube Socket Corporation

"Under Exclusive License of Mycalex Corporation of America"

30 Rockefeller Plaza, New York 20, N.Y.

SINCE 1919 MYCALEX THE INSULATOR TRADE MARK REG. U.S. PAT. OFF.

MYCALEX CORP. OF AMERICA

"Owners of 'MYCALEX' Patents"

Executive Offices: 30 Rockefeller Plaza, New York 20, N. Y. Plant and General Offices: Clifton, N. J.

BRADLEY RECTIFIERS *perform as rated!*

SE8L SERIES
Selenium for high voltage uses.

YOU CAN COUNT on performance exactly as rated with Bradley rectifiers — whether your requirements involve one unit or a hundred thousand units. Our exclusive vacuum process—as applied to selenium and copper oxide rectifiers — provides the highest type of quality control. You get the rectifier you need, predictably accurate, true to rating and long-lived even under extreme operating conditions.

SPECIAL POWER CONVERSION PROBLEMS — the kind that get you shrugs elsewhere — are challenges that we accept and handle with speed and competence. Bradley has helped many leading manufacturers use rectifiers in new ways that have led to improved product performance. We can help you, too, on either standard or special requirements. If your product involves a rectifier — see Bradley to get the performance desired.

CX14 SERIES
Copper oxide for instruments.

SE11X SERIES
Selenium for high current uses.



BRADLEY LABORATORIES, INC.
82 MEADOW STREET NEW HAVEN 10, CONNECTICUT

plus values

in the cords on your products

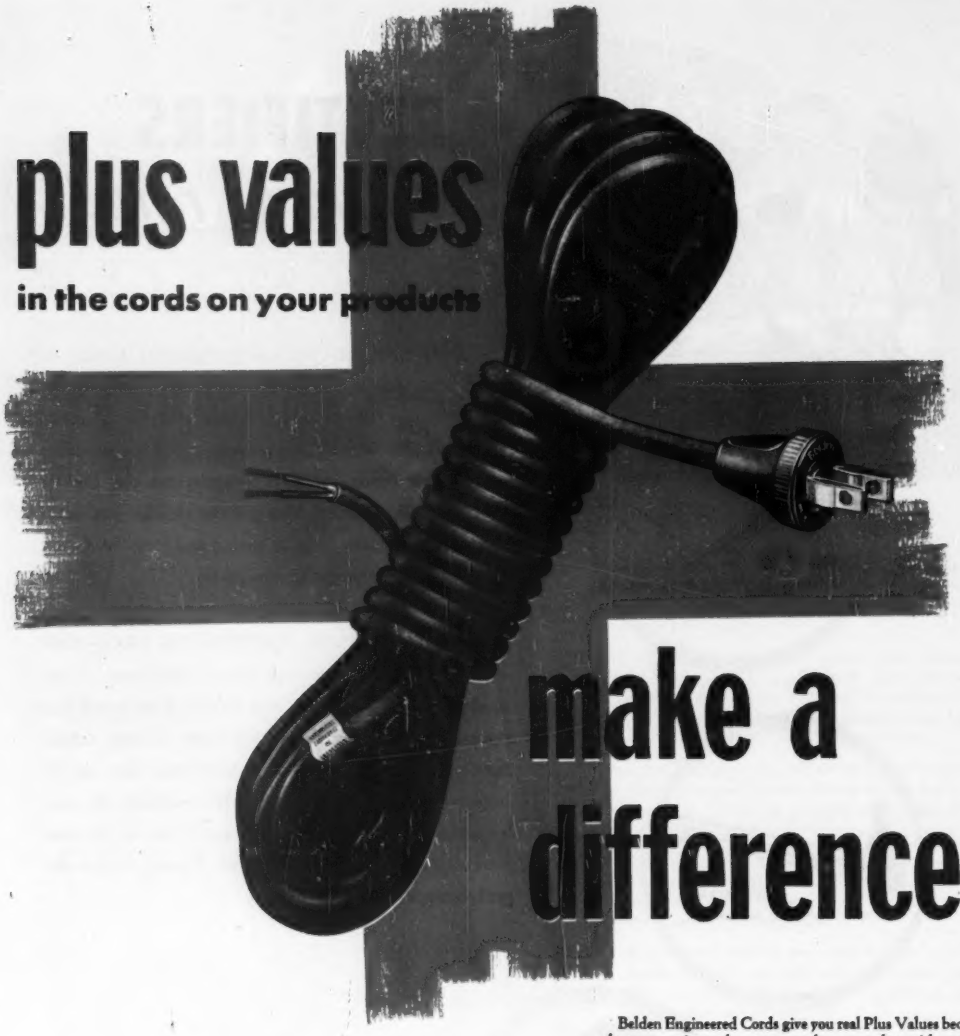

make a difference

a Belden Cord Means

+ SAFETY and APPEARANCE

+ QUICK ASSEMBLY

+ FEWER REJECTIONS

+ LONG LIFE IN SERVICE

Belden Engineered Cords give you real Plus Values because they are engineered to your product, complete with molded plugs or connectors. They are built far above minimum standards, to give your product a chance to operate without cord failure and to maintain your customer's good will.

All Belden Cords are factory tested to eliminate cord grief —extra assembly operations—rejections—extra cost. Investigate Belden Cords, today. Write

Belden Manufacturing Company
4625 W. Van Buren Street
Chicago 44, Illinois

CORDITIS-FREE CORDS BY

Belden

WIREMAKER FOR INDUSTRY

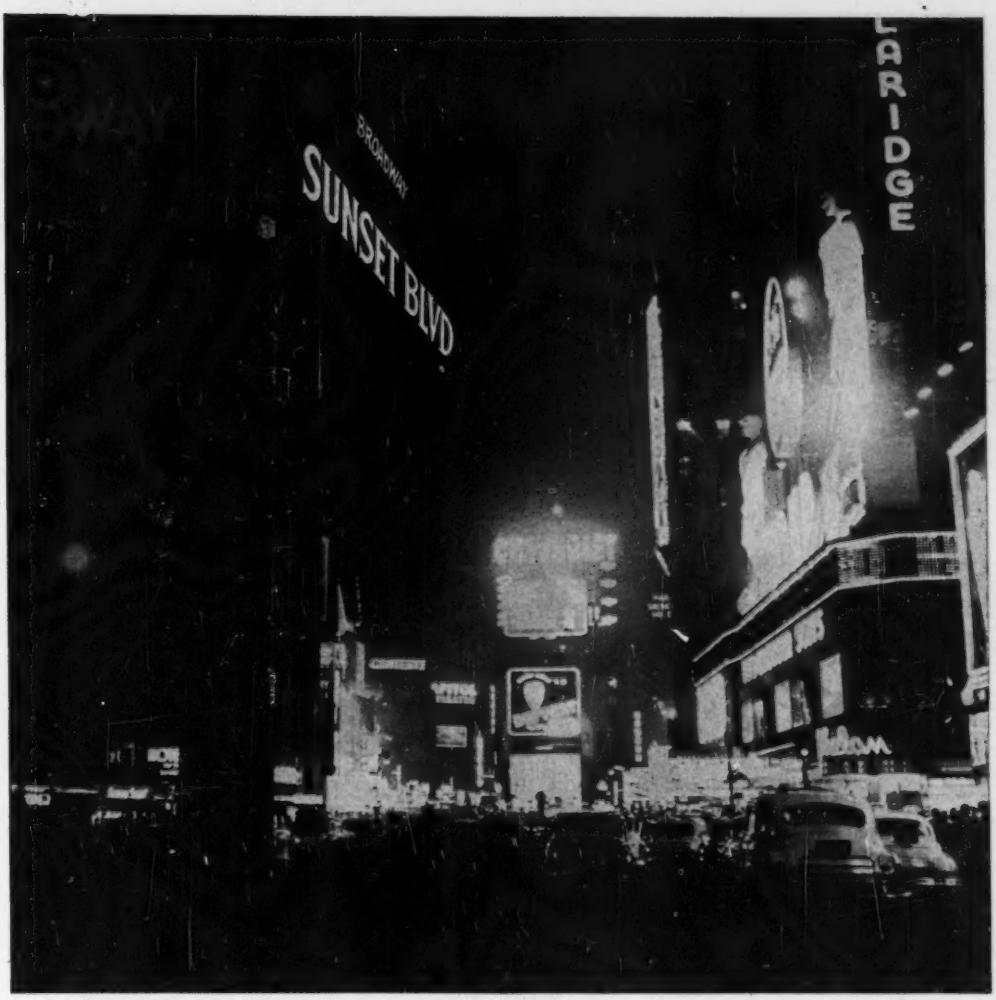

HOW DID SUNSET BLVD GET ON BROADWAY?

Everyone knows that it's hard to be in two places at the same time.

But recently, Paramount Pictures had to be in 387 places at once.

The release of their smash hit, "Sunset Boulevard," called for *simultaneous* openings in theatres on Broadways all over America. And although Gloria Swanson is being mentioned for an Oscar, Paramount feels there ought to be a special award for a star not even mentioned in the cast.

That's Air Express!

Thanks to Air Express, Paramount could work on the cutting, editing and printing of this film up to the last minute —and still get there on time!

But, you don't have to be in the motion picture industry to profit from regular use of Air Express. Here are its unique advantages which any business can enjoy:

IT'S FASTEST — Air Express gives the fastest, most complete door-to-door pick up and delivery service in all cities and principal towns, *at no extra cost.*

IT'S MORE CONVENIENT — One call to Air Express Division, Railway Express Agency, does it all.

IT'S DEPENDABLE — Air Express provides one-carrier responsibility all the way and gets a *receipt upon delivery.*

IT'S PROFITABLE — Air Express expands profit-making opportunities in distribution and merchandising.

Like to know more? Call your local Air Express division of Railway Express Agency.

AIR EXPRESS
GETS THERE FIRST

THE CERAMIC CORES THAT PAVED THE WAY TO BETTER TV

STACKPOLE Ceramag®

- ✓ Lower losses with higher efficiency and lower operating temperatures
- ✓ Lighter weight, smaller sizes for more compact construction, lower costs of finished equipment
- ✓ Much higher permeability
- ✓ Less corona effect
- ✓ Lower cost

Technically, Stackpole Ceramag Cores are molded from a metallic oxide powder mixture which, when properly handled during processing, promotes cubic crystal growth. This results in a non-metallic material having low eddy current loss and exceptionally high permeability.

Practically, Stackpole's skill in the highly critical fabrication of these cores in production quantities has resulted in lower costs and higher standards of performance and dependability for the nation's leading television receivers.

Besides the more popular standard Ceramag core types illustrated above, many specials are regularly supplied.

Electronic Components Division

STACKPOLE CARBON COMPANY, St. Marys, Pa.

NEED A MIXER FOR YOUR UHF TV CONVERTER DESIGN?

SPECIFY GENERAL ELECTRIC 1N72* UHF GERMANIUM DIODES

Designed specifically for the TV market and performance tested for a full year, this low noise, high stability diode is now available in production quantities at new low prices.

CHARACTERISTICS: Low noise factor . . . improved burn-out resistance . . . operation not affected by overloads . . . snap-in design for use with miniature clips to avoid inductive leads . . . input and output impedances approximately 100-500 ohms . . . no contact potential . . . welded whisker construction.

New Plant Facilities To Meet Total Industry Requirements —A complete new G-E plant devoted exclusively to the manufacture of diodes is now in operation near Syracuse, New York. These facilities enable us to handle the total industry requirements for UHF television mixer crystals. General Electric application engineers are at your service to help your designers interpret the characteristics of this crystal to your circuit's advantage. For full information, call the G-E electronics office nearest you or write for Bulletin X57-015A: *General Electric Company, Section 411, Electronics Park, Syracuse, New York.*

*Formerly designated G-7

SPECIFICATIONS

UHF TYPE 1N72 (Formerly Designated G-7)

Specifications at 25° C:

Design frequency.....500 mc
Useful frequency range.....DC to over 1,000 mc
Noise figure.....14 to 19 db*

*Measurements made with Measurements Corp. Model 84 Signal Generator, R.C.A. Model A Converter with 0.7 ma rectified local oscillator current and G-E Model 814 television receiver with television channel 3 used as IF frequency with noise band width of 3.5 mc. Noise figure is measured by noting signal required to double zero signal noise power output of converter. Similar measurements made on average 1N21B diodes indicated noise figure of 16 db.

Maximum Ratings:

Average rectified current.....25 ma max.
Peak rectified current.....75 ma max.
Temperature range.....—50 to +75°C

...Other Applications, Too

For example, as harmonic generators to provide local oscillator injection from the low frequency local oscillator . . . As detectors in high frequency RF voltage measurements . . . and in low frequency circuits where a low impedance crystal is needed.

COMPLETE LINE OF GENERAL ELECTRIC WELDED GERMANIUM DIODES

General Purpose		Television	JAN	UHF	Quads	Transistors
1N48	1N63	1N64	1N69	1N72	1N73	SX-4A
1N51	1N75	1N65	1N70		1N74	Z-2
1N52						

You can put your confidence in—

GENERAL ELECTRIC

PEAK

IN POWER VERSATILITY QUALITY PERFORMANCE

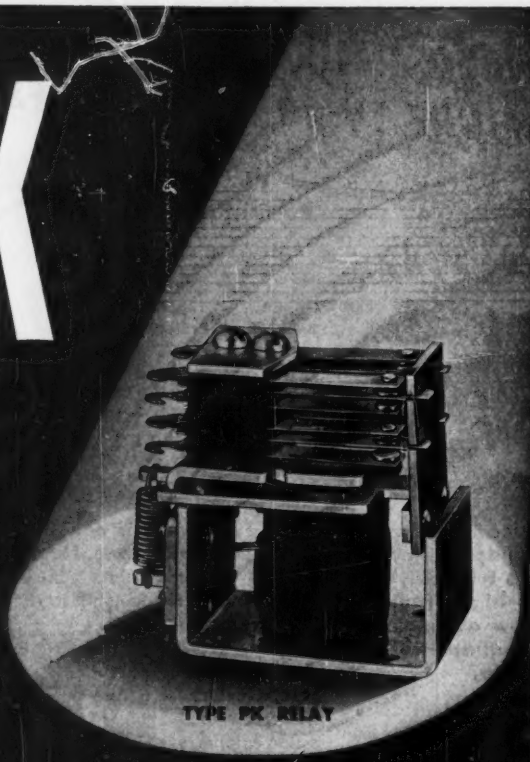

TYPE PK RELAY

HERE ARE THE FACTS AND FIGURES:

CONTACTS: 10 amp. standard. 24 volts D.C., 115 volts A.C.
15 amp. contacts available.

SENSITIVITY: D.C.: 4 pole 1.5 watts
2 pole .7 watts
A.C.: 4 pole 5 volt amperes
2 pole 2.5 volt amperes
Can also be furnished in 6 pole AC and DC up to 4000 Ohms.

COIL: To 115 volts D.C., 230 volts A.C.

NOMINAL HEAT USE: D.C. 30°C above room ambient
A.C. 45°C above room ambient

MAX. INPUT FOR 85° RISE: D.C. 5 watts
A.C. 11 volt amperes

MOUNTING: Base or end mounting

WEIGHT: 4.5 oz. 4 P.D.T.

WEIGHT HERMETICALLY SEALED: 7.7 oz.

DIMENSIONS: Open Relay—2 1/16", 1 1/8", 2 1/16"
Sealed Relay—3 1/16", 1 1/2", 2 9/16"
Overall Mounting Flange—3 1/8"
Center to Center Mounting Holes—2 11/16"

A Quality Relay

The new Allied PK Relay is designed to offer versatility in a power relay where quality and low cost are factors. Besides stability in operation its reliability allows a range in applications from high quality instruments to vending machines. The PKU relay will comply with Underwriters Laboratories requirements and can also be supplied hermetically sealed.

Bulletin PK gives complete details. Send for your copy today.

Be sure to send for your copy of Allied's Relay Guide. It gives the engineering data for all Allied relays in a concise tabular form for easy reference.

ALLIED CONTROL COMPANY, INC. 2 EAST END AVENUE, NEW YORK 21, N.Y.

Improve Your Controls with VICKERS MAGNETIC AMPLIFIERS

SELF-SATURATING

HIGH POWER

For 60 cps power sources—27 styles—maximum output powers from 62 watts to 4200 watts.

HIGH PERFORMANCE

For 60 cps power sources—28 styles — maximum output powers from milli-watts to 108 watts. For 400 cps power sources —20 styles—maximum output powers from 30 watts to 385 watts.

HIGH GAIN

For 60 cps power sources — 22 styles — maximum output powers from ½ watt to 1200 watts.



All amplifiers furnished complete with Vickers special Selenium Rectifiers.

Now More Than 90 STANDARD Styles Offer These Advantages

- HIGH PERFORMANCE
- NO MAINTENANCE
- RUGGED CONSTRUCTION NO MOVING PARTS
- NO WARM-UP TIME
- A-C OR D-C CONTROL A-C OR D-C OUTPUT
- RESPONDS TO SUM OR DIFFERENCE OF SEVERAL SIGNALS
- ALLOWS ELECTRICAL ISOLATION BETWEEN CIRCUITS

TYPICAL APPLICATIONS

Servomechanisms — Line-To-Line Voltage Regulators — Hydraulic Transmission Controls—A-C and D-C Generator Voltage Regulators—Speed and Frequency Regulators — Lamp and Furnace Controls—Temperature Regulators—Time Delay Devices.

WRITE FOR BULLETIN 20-A

for information on the *complete* line of Vickers Standard Magnetic Amplifiers. Please make request on your letterhead.



VICKERS ELECTRIC DIVISION

VICKERS Inc.

1801 LOCUST STREET • ST. LOUIS 3, MISSOURI

85° BELOW ZERO

would freeze an eskimo

. . . WON'T FREEZE VARGLAS SILICONE

Contains samples for you to test of the revolutionary development of Varflex laboratories . . .

500° ABOVE

would roast the devil

. . . WON'T ROAST VARGLAS SILICONE

Electrical Insulating Tubing and Sleeving lead wire and tying cord

Efficient at 500° F. or more in some applications—yet completely flexible at —85° F. Resistant to moisture and lubricating oil—flame resistant and self-extinguishing—this pioneer silicone tubing and sleeving developed by Varflex is available in various NEMA colors where required.

Varglas Silicone is a combination of *Varglas*—continuous filament Fiberglas; moisture and fungus proof; will not burn; strong and flexible at high and low temperatures; chemically inert . . . and *Silicone High Temperature Resin*—which has a natural affinity for Fiberglas; renders it abrasion-resistant, flexible and non-fraying. Normalizing process removes binder and organic inclusions from the Fiberglas; improves electrical qualities and allows uniform impregnation.

Investigate the NEW, low cost VARFLO Sleeving and Tubing if you do not have to allow for an unusually high operating temperature. Samples and prices on request. It's flexible. It takes rough handling without loss of dielectric. It won't fray out. Made with a Fiberglas braid, it won't support combustion—YET COSTS NO MORE THAN COTTON.

Clip and mail this coupon TODAY!

VARFLEX CORPORATION
308 N. Jay St. Rome, N. Y.

Please send me folder containing free samples of Varglas SILICONE products.

Name_____

Company_____

Address_____

City_____ Zone____ State_____

Varflex CORPORATION

Makers of Electrical Insulating Tubing and Sleeving

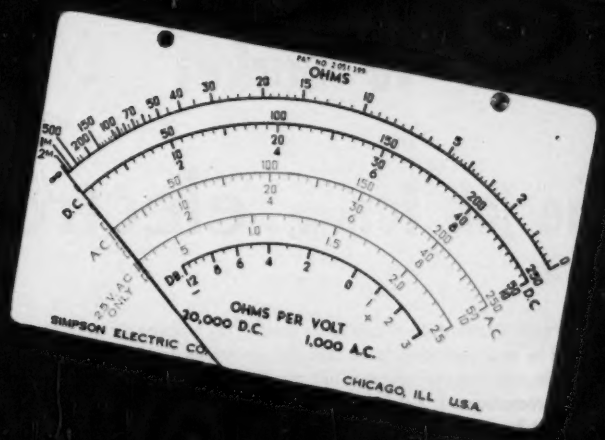

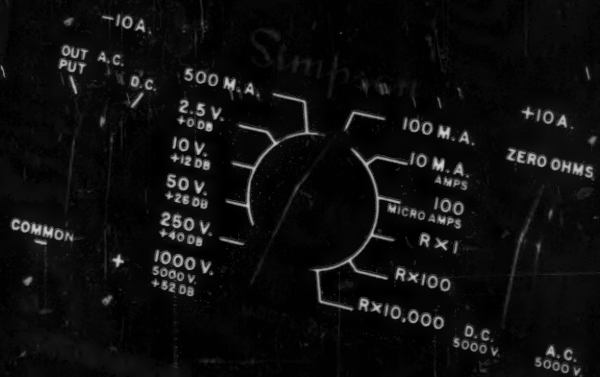

THE SAME LOW PRICE

$38.95

the Volt-Ohm-Milliammeter

that needs no introduction!

bringing Your Product to market

is a full time job for... electronics

When you consider that there are more than 2,000 widely-diversified products sold to manufacturers and users of electronic equipment, the problem of bringing your product to that market — and selling it, might, at first, seem complicated. But it isn't.

Consider first how products are bought and by whom. Components and materials used in the design, testing or production of electronic equipment of all sorts are bought for engineering reasons by engineers. That this is true is obvious when one considers the extremely technical nature of the industry's products. The buying for this industry is done by men like the one shown . . . back-in-the-plant, design, development and test engineers, generally inaccessible to salesmen.

And it is their counterparts throughout industry and, of course, in communications and broadcasting who, by use of electronic equipment to solve their own design, test, production and control problems, create the markets for packaged electronic equipment.

It is for these men that ELECTRONICS is edited. Bringing them the up-to-the-minute electronic design, use and product information is ELECTRONICS' full time job. (A job it has held for over twenty years.) Because of this, they work with ELECTRONICS at their sides and refer to it more than to any other single source for the information they need in their work. It is for this reason that bringing your product to this market isn't as complicated as it might seem at first. ELECTRONICS provides a market place, the only one, in which you can reach these men who do the specifying and buying of electronics throughout industry... be it electronic manufacturing or general industry.



electronics THE DIRECT ROUTE TO---

12 REGULAR ISSUES
supplying latest technical information, design and product news

A McGraw-Hill Publication • 330 West 42nd St., New York 18, N. Y.

What is YOUR PRODUCT?

With ELECTRONICS' blanket coverage of all industry, it doesn't matter whether your product is a material, component or a piece of electronic gear—a getter or a gear train, a capacitator or a cabinet, a servo or a spring, a motor or a motor control.

Both designers and users of electronic equipment find ELECTRONICS their best source of information. Manufacturers find it their best source of sales to both.

Take instrumentation for example. ELECTRONICS research department recently completed a survey of reader purchasing in that one, only partially electronic field. Returns were from every segment of industry and revealed that 116,395 instruments of 53 specified types are used by the four hundred and fifty-nine respondents. A copy of the complete results is yours for the asking.

Similar documented evidence that ELECTRONICS is not only the market place for all things electronic but also for all manner of other products used in conjunction (allied) with electronic products is available in another survey study we would like to show you, "The ELECTRONICS Audience—What is its buying scope?" Ask your ELECTRONICS representative for details.

Further evidence is the list at the right showing some of the allied products currently being advertised successfully in ELECTRONICS. Positive evidence of the market offered by ELECTRONICS for your particular product can be obtained profitably by advertising it in ELECTRONICS.

ANNUAL BUYERS' GUIDE
supplying all basic product source and technical specifying data

——A $2,000,000,000 MARKET PLACE

SUCCESS STORIES

Following is a partial list of allied products currently being advertised successfully in ELECTRONICS . . .

BEARINGS
BLOWERS
BOBBINS
BUSHINGS
CARBON
CERAMICS
COUPLINGS
DRAFTING EQUIPMENT
FASTENERS
GASES
GEAR TRAINS
GRAPHITE
HAND TOOLS
HEATING TANKS
INSULATION
IONIZATION CHAMBERS
LIGHTING EQUIPMENT
METAL STAMPINGS
METALS & ALLOYS
MOLDINGS
MOTORS
MOUNTINGS
PAPER
PHOTOGRAPHIC EQUIPMENT
PLASTICS
RINGS
SEALS
SOLDER
SOLDERING GUNS
SPRINGS
TAPES
TUBING
WASHERS
WIRE & CABLE

CARBOLOY assures uniform

1 Pouring molten Carboloy Permanent Magnets from electric furnace at 1800°C. Samples of every melt are checked for physical, chemical, and metallurgical qualities before release for fabrication.

3 Every Carboloy Alnico Permanent Magnet is subjected to countless quality checks like this flux test to assure you of outstanding uniformity and performance.

2 As permanent magnets move from one production step to the next, every batch is quality checked and recorded.

LOOK TO

CARBOLOY CO., INC.

for the finest in versatile metals

continuous quality control Alnico permanent magnets

Carboloy's rigid quality tests pay off in uniform high quality Carboloy Permanent Magnets for peace-time uses like this television tube. You are assured of the same high quality for radar and other defense applications.

FOR OVER 22 years the name "Carboloy" has been a synonym for uniformity and outstanding quality with users of cemented carbide. Today, the same exacting standards of quality control that have earned this reputation for Carboloy Company, Inc., are being applied to the production of permanent magnets, (among them Alnico) and other versatile metals, mass-produced for industry.

Your inquiries or orders for Carboloy Permanent Magnets for use in essential goods will receive immediate attention.

The trade-mark "Carboloy" identifies manufacture by Carboloy Company, Inc.

CARBOLOY
THE QUALITY BRAND

PERMANENT MAGNETS

(Alnico and other types)

GREATER VALUE

WITH BENDIX ELECTRICAL CONNECTORS

PRESSURE TIGHT SOCKET CONTACTS

PLUS

- Moisture-proof
- Radio Quiet
- Single-piece Inserts
- Vibration-proof
- Light Weight
- High Insulation Resistance
- Easy Assembly and Disassembly
- Fewer Parts than any other Connector
- No additional solder required

Outstanding design and precision workmanship assure completely pressurized electrical connectors for all sizes of contacts. A truly important feature, but only one of the many exclusive advantages that contribute toward making Bendix outstanding in the electrical connector field. Increased resistance to flash over and seepage is made possible by the use of Scinflex dielectric material—an exclusive development of Bendix. In temperature extremes, from −67°F. to +300°F. performance is remarkable. Dielectric strength is never less than 300 volts per mil. Remember, for the greatest value in electrical connectors, it pays to specify Bendix. Our sales department will gladly furnish complete information on request.

PLUS



SHELL
High strength aluminum alloy . . . High resistance to corrosion . . . with surface finish.

CONTACTS
High current capacity . . . Low voltage drop.

SCINFLEX ONE-PIECE INSERT
High dielectric strength . . . High insulation resistance.



Pin and socket arrangements available for all sizes of contacts.

Bendix

SCINTILLA MAGNETO DIVISION OF

Mr. BROADCASTER

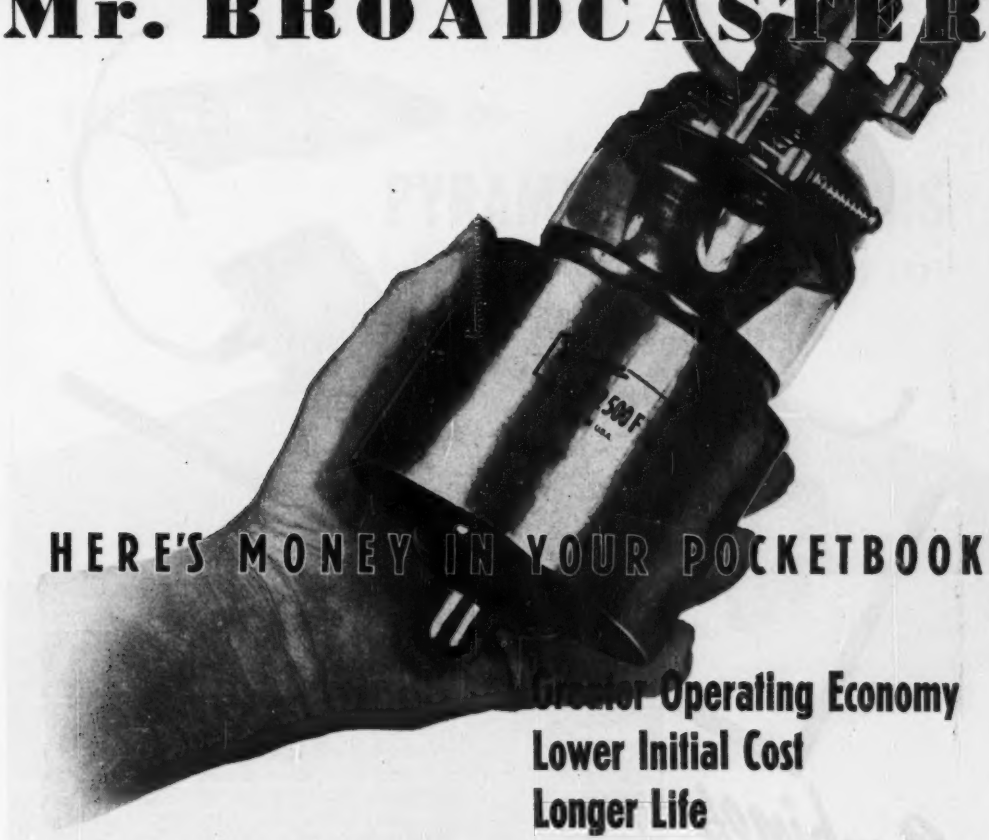

HERE'S MONEY IN YOUR POCKETBOOK

Greater Operating Economy
Lower Initial Cost
Longer Life

You save from every angle when you buy and use transmitters employing Eimac tubes. Saving starts with the initial tube cost . . . you save again every hour you're on the air because of higher tube operating efficiency . . . and you save still further by staying on the air more hours without service shutdown.

Take as an example of Eimac tube economy the rugged 3X2500F3 triode pictured above. Initial cost is $198.00 each, yet as power amplifiers they will provide 5 kw output per tube . . . that's lots of watts per dollar cost. The dependability of this tube and its high frequency version (type 3X2500A3) has been proven over many years by thousands of hours of life in AM, FM, and TV service.

These tubes are the nuclei around which modern transmitter circuits have been developed and built.

Let us send your engineering staff complete data on the 3X2500F3 and other Eimac tubes for broadcast service. A letter to us will bring the material by return mail.

EITEL-McCULLOUGH, INC.
San Bruno, California
Export Agents: Frazar & Hansen, 301 Clay St., San Francisco, California

249

BROWN INSTRUMENTS ACCELERATE RESEARCH

	27 RPM MOTOR	54 RPM MOTOR	162 RPM MOTOR
MAXIMUM TORQUE	Approx. 85 inch-ounces	Approx. 43 inch-ounces	Approx. 19 inch-ounces
MAXIMUM POWER	Approx. 6300 inch-ozs. per minute at approx. 17-18 rpm.	Approx. 6700 inch-ozs. per minute at approx. 30-32 rpm.	Approx. 8150 inch-ozs. per minute at approx. 100 rpm.
POWER REQUIREMENTS	Line field—approx. 9.5 Watts. Amplifier field—approx. 4.0 Watts. Total power—approx. 13.5 Watts.		

Combines

Reversibility and Low Inertia

...THE BROWN 60 CYCLE BALANCING MOTOR

Available in the 3 speeds indicated in the table, this totally enclosed and self-lubricated motor is ideal for service where positive positioning is required. Its low inertia eliminates coasting, promotes maximum effectiveness from any dynamic braking. The motor is designed to have a tapered curve of speed versus voltage and, at the same time, to maintain high torque at low speeds. Your local Honeywell engineer is qualified to discuss your application. Call him in, today . . . and write for a copy of Data Sheet #10.20-2. MINNEAPOLIS-HONEYWELL REGULATOR CO., *Industrial Division,* 4428 Wayne Ave., Philadelphia 44, Pa. Offices in more than 80 principal cities of the United States, Canada and throughout the world.

MINNEAPOLIS Honeywell

BROWN INSTRUMENTS

THE NEW HOME OF

PYRAMID CAPACITORS

will be in full operation by FEBRUARY 1, 1951

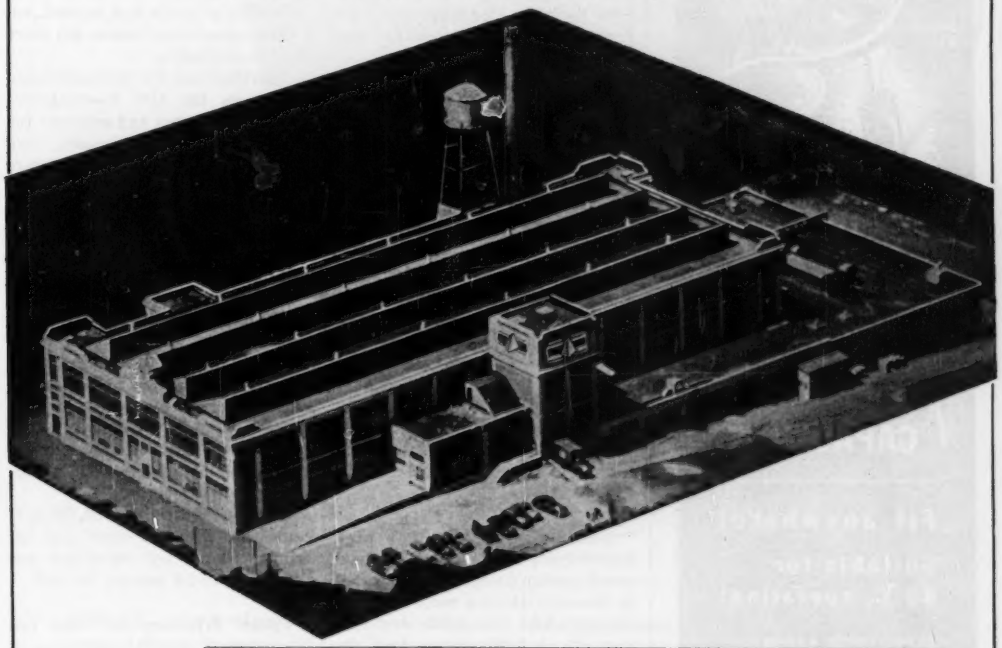

LOCATION	1445 HUDSON BOULEVARD, NORTH BERGEN, N. J.
SIZE	137,000 SQUARE FEET
PRODUCTS	ELECTROLYTIC CAPACITORS PAPER CAPACITORS RF INTERFERENCE FILTERS

Your inquiries are invited

PYRAMID ELECTRIC COMPANY

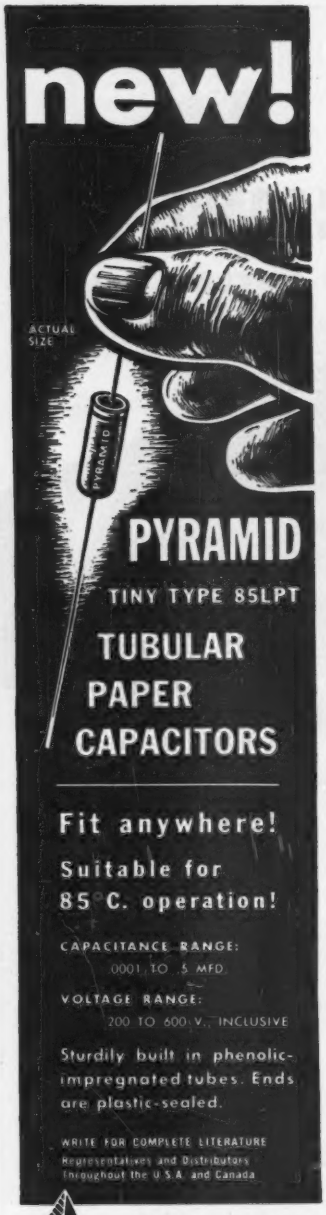

BUSINESS BRIEFS

By W. W. MacDONALD

Audio Fair has made a place for itself among important annual meetings, national in one sense and local in another. Second shindig conducted under the auspices of the relatively young Audio Engineering Society at the Hotel New Yorker pulled more engineers from greater distances to hear technical papers, had 50 percent more exhibits and a larger overall attendance than in 1949. But local dealer-distributors rented many of the rooms and metropolitan-area hobbyists swelled the gate.

Men and women attending moved in a world consisting largely of corner speakers and magnetic amplifiers, amid weird sounds such as those generated by a showpiece recording aptly entitled "Ionisation" that rattled the rafters. There appeared to be a growing trend toward the use of separate remote-control boxes for high-fidelity amplifiers. Incidentally, the desirability of standardized input and output connectors for such amplifiers is becoming evident.

Difficulty of deciding how high high-fidelity should be in new sound system designs is illustrated by the story about a recent listener test in which two units, one cutting off at 5,000 cycles and the other going on up, were compared. A white light indicated when one unit was playing and a yellow light showed when the other was in use. Study of ballots indicated only one thing . . . that people prefer white lights.

Engineers make poor test audiences. Two identical amplifiers were played but when using one of them needle scratch was deliberately introduced into the recording. The technicians assumed that because they heard scratch one amplifier was doing a better job on highs, and voted for it.

United Nations has until recently rented American cameras to handle televising of meetings at Lake Success and Flushing. Now, according to H. B. Rantzen, who is Director of the Telecommunications Services Division, British units are being tried out too. Most attractive appears to be a type employing an image orthicon, first because equipment must perform at low light levels and, second, because replacement tubes are more readily available.

Specifications for new electronic equipment for UN Headquarters have been written and requests for bids are not internationally. We understand that there are severe financial restrictions so that it is a question of fitting new gear in with equipment already on hand rather than provision of entirely new systems.

650 Radio Patents were the subject of 1,500 suits between 1910 and 1942. Some 35 percent were dismissed or settled out of court, and 30 percent involved consent decrees, validity not being determined. Information regarding the remainder of the suits is obscured in the records.

Of the patents involved, 16 percent were declared valid and infringed, 3 percent valid but not infringed, and 2 percent invalid.

Public Relations are very important to a large lab operating in the midst of a nice residential neighborhood near New York. So before shutting down last Christmas eve the timer on a high-power electronic carillon was set to spread carols over the countryside at 2 o'clock the following afternoon.

The thing went off at 2 a.m.

Wayne Coy of the FCC says there are now 1,200 American ship-borne radar installations.

A Subscriber who works for a southern broadcast station has worked out some of the details of an idea that might be useful to chiropractors. He thinks that if low-voltage a-c is applied each side of a patient's backbone amplified bridge output potential might

The A-B-C's of SYLVANIA SILICON DIODES

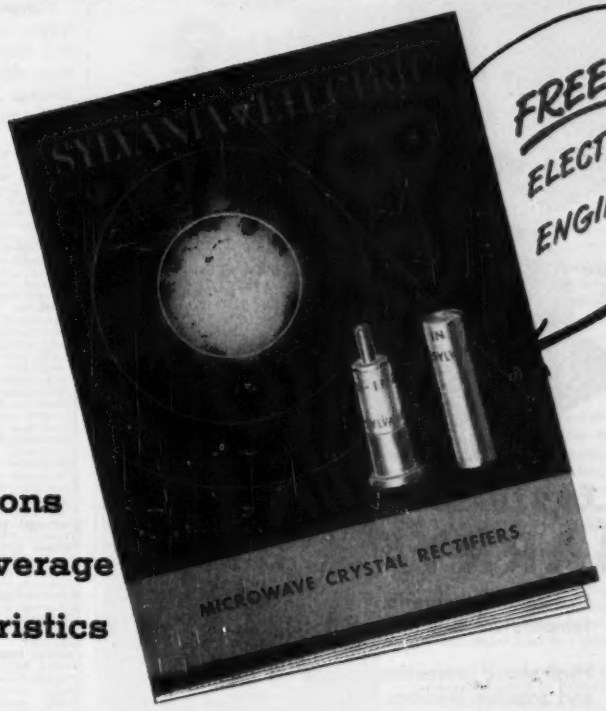

FREE to ELECTRONICS ENGINEERS

Applications

Band Coverage

Characteristics

● Here's a fund of up-to-the-minute information about Sylvania Silicon Diodes that belongs in the file of every electronics engineer.

This new 16-page booklet describes crystal rectifiers covering the frequency range from 1000 to 25,000 mc per second. It explains the various types of Silicon Diodes with their ratings and common applications.

The booklet discusses mixer crystals, including the new matched pairs, microwave video detectors and Silicon Diode use in UHF and SHF instrument applications. For your free copy of this new booklet, simply clip the coupon and mail today.

SYLVANIA ELECTRIC

ELECTRONIC DEVICES; RADIO TUBES; TELEVISION PICTURE TUBES; ELECTRONIC TEST EQUIPMENT; FLUORESCENT LAMPS, FIXTURES, SIGN TUBING, WIRING DEVICES; LIGHT BULBS; PHOTOLAMPS; TELEVISION SETS

Sylvania Electric Products Inc.
Dept. E-1001, Emporium, Penna.

Please send me your new FREE booklet "Microwave Crystal Rectifiers." Also send me information on Sylvania Magnetrons.

Name_____

Company_____

Street_____

City_____ Zone____ State_____

SHOCK AND VIBRATION NEWS

ALL-METL BARRYMOUNTS

for unusual airborne applications

FOR EXTREME LOW TEMPERATURES

FOR EXTREME HIGH TEMPERATURES

Design Features of ALL-METL BARRYMOUNTS

1. . . . Outstanding vibration isolation under severe temperature and environmental conditions.
2. . . . High shock protection in accelerated take-offs and arrested landings.
3. . . . Unit mountings are interchangeable with mountings now in use.
4. . . . Complete line of ALL-METL mounting bases to JAN-C-172-A dimensions.
5. . . . Special ALL-METL bases made to customers' requirements.

FREE CATALOGS give dimensions and load ratings of stock BARRYMOUNTS. Write today for Catalog 509 describing ALL-METL unit mountings and mounting bases. Catalog 502, covering general aircraft applications, and Catalog 504, covering industrial mountings, are also free on request.

THE BARRY CORP.

Main Office 707 Pleasant St. ● Watertown 72, Massachusetts

New York Rochester Philadelphia Washington Cleveland Dayton Detroit
Chicago Minneapolis St. Louis Seattle Los Angeles Dallas Toronto

indicate differences in tissue resistance associated with nerve impingement and that this might help when diagnosing spine defects.

Component Parts made by electronic equipment manufacturers find their way into an extremely wide variety of end products. Vic Mucher says Clarostat's are used in the following:

Air cleaners
Aircraft de-icer controls
Aircraft wing flap controls
Alarm systems
Analyzers
Antenna dummy loads
Antenna rotor controls
Atomic program
Attenuators
Audio-frequency amplifiers
Audio-input amplifiers
Battery-charging equipment
Battery-testing equipment
Boosters
Cathode-ray oscillographs
Colorimeters
Communication systems
Compasses
Computers
Cyclotrons
Diathermy equipment
Direction finders
Electric dryers
Electrical bridges
Electrocardiographs
Electronic dictation machines
Electronic heating equipment
Electronic sorters and counters
Fire-control apparatus
Fire detectors
Fuel gages
Gas detectors
Graphic recording instruments
Guided missiles
Heat-controlling equipment
Intercommunication systems
Loran navigational devices
Meteorological studies
Microwave amplifiers
Microwave landing systems
Mine-detection apparatus
Monitors
Optical equipment
Power amplifiers
Precision measuring instruments
Radar microwave amplifiers
Radar recording cameras
Radar systems and equipment
Radiation counters
Receivers
Recorders
Rockets
Servo amplifiers
Servomechanisms
Signal generators
Sonar
Sonobuoy
Spectrophotometers
Speech scramblers
Synchroscopes
Transceivers
Transmitters
Transmitter input controls
X-ray cameras

Advertising of radio and television sets increased sharply in the last half of 1950. An informal poll of RTMA Advertising Committee members indicates that at least 9 percent more will be spent by the average manufacturer in 1951 than in 1950.

Reader who liked our September wheeze about the new AN-system of definitions points out that CU/SBW-8 would indicate the

eighth model of a coupling unit for a remote-controlled shipboard carrier pigeon.

Industrial Television is already at work, according to Bill Norvell of Remington Rand, in the following applications:

Remote handling of explosives
Adjustment of bombs
Rocket-motor testing
Telemetering
Atomic research
Structural testing of aircraft
Helicopter rotor testing
Teaching of surgery
Navy training programs

Other possible industrial applications of television equipment include:

Observation under water
Microscopic and telescopic observations
Night-watchman operations
Time studies
Manufacturing production control
Department-store merchandising
Sales promotion
Factory training
Transmission of business records
Monitoring of motion-picture sets
Teaching of dentistry
Observation of sports fouls
Transmission of race results
Transmission of weather charts
Traffic control
Civilian defense
Police-record transmissions
Railroad-yard inspection
Reservation information

First widescale use of industrial color television, Norvell thinks, may be in the medical field.

Rectangular Picture Tubes represented 47 percent of all cathode-ray tubes sold to television set makers in July, the first month in which detailed statistics were compiled by RTMA. Eighty-four percent of all c-r tubes sold to manufacturers were 16 inches or more in size.

Business Booster that might appeal to other distributors of electronic equipment is the Electronic Industrial Equipment Show recently staged for the third time in three years by Sam Poncher of Chicago's Newark Electric. Sam displayed the products of 27 manufacturers in Hotel Stevens rooms, served drinks and smorgasbord, attracted over 1,500 potential customers.

Gold Bricks are well known. Not so well known are recently marketed lead bricks simplifying the construction of shielding in radioactivity and other research projects.

Computer Makers, we are told, soon learn to think in terms of microseconds and megabucks.

INTERVAL TIMING
with sensitive relays



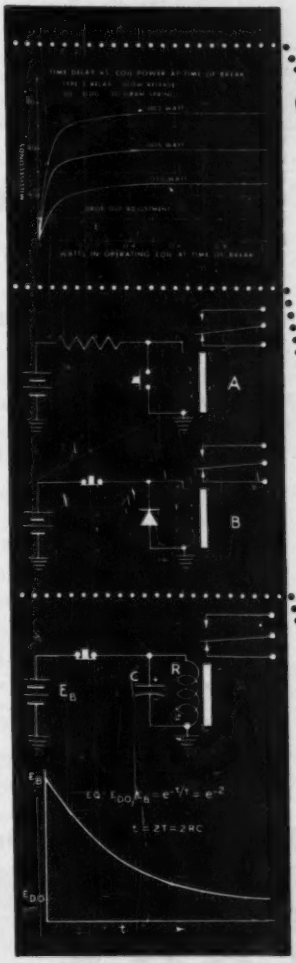

Interval timing in the range 0.02 to 0.20 seconds is advantageously accomplished when a slow releasing relay can be used. Unlike slow make relays of which the operating time is an inverse function of voltage applied to the coil (which affects rate-of-rise of flux), slow release relays need only be operated in a saturated condition to give a time delay independent of applied voltage. (See curves applying to pictured relay, with 50% copper slug.)

Time varies as a function of drop-out setting, which on most sensitive relays can be closely controlled with screw adjustment. It also varies inversely with ambient temperature which affects the resistance of the copper slug. Bimetallic temperature compensation can be applied to the above relay to mitigate this.

Variations of the same principle are presented at "A" and "B", both involving the use of short circuited operating windings as a "copper slug." At "A" a switch is used to control the relay by means of shorting its coil, resistor R limiting short circuit load on battery.

At "B" a crystal diode shunting the coil is non-conducting to battery potential, but when the switch is opened, provides a low impedence path for the decay of coil current. A variable resistor in series with the diode gives adjustable control of the timed interval.

For intervals longer than attainable with the "slug" principle and where moderate precision is adequate, "RC" methods may be employed. Use of sensitive relays permits smaller capacitors or longer time intervals. In the circuit at left, time of drop out, t, is related to the time constant, RC, but not equal to it. After one time constant, T = RC, (T seconds R megohms C microfarads), the voltage will equal 0.37E_B, not necessarily the dropout voltage. In the graph $E_{d.o.}$, the drop out voltage, has been chosen as equal to voltage attained after two time constants. The equation is shown solved on this assumption. Approximate solutions may be attained by taking 37% of E_B, 37% of the result, and so on until $E_{d.o.}$ is reached. The number of times this may be done multiplied by the time constant gives the release interval.

SIGMA Instruments, Inc.
SENSITIVE RELAYS
62 Ceylon St, Boston 21, Mass.

Service Beyond The Sale!

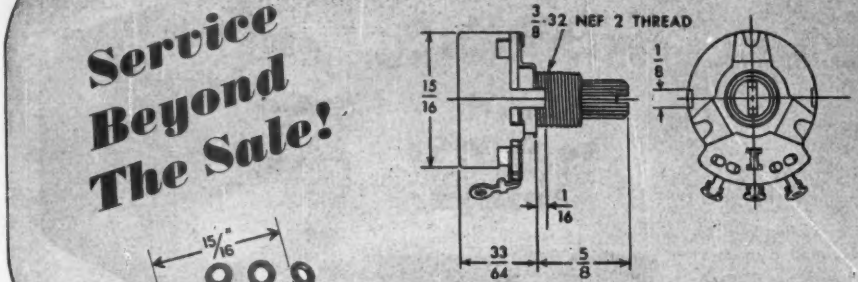

Design Standardization By Mallory

effects real customer savings!

Mallory goes beyond the basic research and development work which results in totally new products . . . and utilizes every opportunity to pass on to customers the savings effected by product standardization.

Such is the case with the well known Mallory Midgetrol. Standardizing its diameter and shaft design resulted in cost reductions for radio and television manufacturers. The standard molded phenolic shaft provides a combination hand knurl and screwdriver slot adjustment at no extra cost . . . and it is available with either ¼" or ⅜" bushing length. In addition, the Mallory Midgetrol occupies less space than larger controls, with no sacrifice in wattage rating.

That's service beyond the sale!

Mallory's electronic component know-how is at your disposal. What Mallory has done for others can be done for you!

15/16" MALLORY MIDGETROL*

Electrical characteristics specially designed for critical applications in television, radio and other circuits. Insulated shafts are knurled for ease in adjustment. Current-carrying parts provide 1500 volt insulation . . . 15/16" diameter saves space . . . phenolic material eliminates mechanical noise. Precision-controlled carbon element provides smooth tapers, quiet operation, accurate resistance values, less drift in television applications.

**Trade Mark*

Television Tuners, Special Switches, Controls and Resistors

P. R. MALLORY & CO. Inc.

MALLORY

P. R. MALLORY & CO., Inc., INDIANAPOLIS 6, INDIANA

SERVING INDUSTRY WITH

Electromechanical Products
Resistors *Switches*
TV Tuners *Vibrators*

Electrochemical Products
Capacitors *Rectifiers*
Mercury Dry Batteries

Metallurgical Products
Contacts *Special Metals*
Welding Materials

CROSS TALK

► **COBALT** . . . The first real taste of shortage in the electronics industry due to conflict with military needs came last month when the supply of cobalt for civilian production was sharply cut back. Since Alnico 5 magnets are 25-percent cobalt, and since less than 30 days supply of this material was on hand, things looked (and still look) black for production of radio and television sets. An understandable hue and cry arose, to the effect that television and radio production would be shut down tight unless the government relented and diverted cobalt from jet engines to television.

Alnico is used in television sets in focusing magnets, centering magnets, ion traps and loudspeaker fields. Prewar loudspeakers used electromagnets; centering was accomplished by the d-c components in the scanning yoke. Preware electrostatic electron guns required no focusing coil or magnet; early postwar sets used electromagnetic focusing coils.

If and when the Alnico supply is cut off completely, these older designs must be readopted. The principal problem appears to be the focusing unit, which takes several pounds of Alnico and would take several pounds of copper in a conversion unit. While copper is not so scarce as cobalt, purchasing agents report that getting extra pounds of copper for focus coils is out of the question in today's market. So we may be faced with a return to the electrostatic gun, much longer picture tubes and deeper cabinets.

Since a single jet fighter may be worth a lot of television sets in months to come there is little point in screaming bloody murder. But if civilian production is to continue, both government and industry must adopt a cooperative and flexible frame of mind. Engineers must be ready and willing to redesign around shortages quickly and cleverly. The management must be willing to prepare for and pay the cost of such conversions. The public must foot the bill. The government must understand that advance notice of impending shortages is absolutely essential to permit conversions to be ready when the restriction order is issued. Otherwise our industry, and a dozen others essential to defense mobilization, will grind to a standstill before defense orders take up the slack.

► **TURNOVER** . . . Not many years ago, most engineers in the radio receiver business had a well-traveled look and a brand new mortgage, the result of too short tenure in too many jobs. Since the war, the turnover has been slower. Our guess is that the majority of radio engineers now 15 years out of college have been in their present job for at least five years. A record of some sort has been hung up by Mark Glaser of DeWald, who recently completed 20 years as chief engineer of that company. During this time he has designed over a thousand different radio and tv sets.

All of which brings up a question: How many different jobs, or changes of employment, should an engineer in electronics anticipate during his professional life? The different-job-every-year pace that afflicted so many before the war is evidently wrong; it is fraught with insecurity. But is it not also true that the engineer who stays in one company for 20 years (chief engineers excepted) does so at a lower average salary level than the man who makes, say, three changes in that time?

Does the occasional change of job lead to the fuller life, pension rights to the contrary notwithstanding? We solicit opinions, especially from men over fifty (who have had the experience) and under thirty (who may be wondering what the answer is).

► **CURTAIN** . . . About a year ago, we received a letter from a reader who lives in Eastern Europe in which he described an idea for a new type of phototube. In his letter, he explained that he had no means for investigating his ideas, and furthermore, so strict were the rules and regulations behind the iron curtain, that he dared not reveal his identity. This letter was published in the *Backtalk* department of ELECTRONICS. After it appeared in print, we received a letter from engineers of the Rauland Corporation, S. Paksweer and W. O. Reed, who had taken up the idea and had actually built a tube according to the proposed specifications. A series of tests were run, and while the results will probably not change the course of world affairs, they proved that the author's predictions were correct. A detailed account of the findings appears this month on page 126. Our correspondent is anxious to find a place in our industry. Any job offers?

MILLIMETER

There is a need for tubes and circuits that will operate in the unexploited millimeter wavelength region between microwaves and the infrared. Present unsatisfactory methods using incoherent sources are reviewed and new techniques suggested



FIG. 1—Lebedew's 6.6-mm spark oscillator used in experiments at the University of Moscow in 1895



FIG. 2—Glagolewa-Arkadiewa's source of millimeter waves from which radiations from 129 to 50,000 microns were obtained



FIG. 3—Present state of tubes at millimeter wavelengths. The dotted area shows the range of average power output available from electron tubes. Pulsed tubes give higher average powers than c-w tubes

ELECTRONIC ENGINEERS and physicists have worked extensively with radiations at most wavelengths available in the spectrum. There is, however, a little-exploited gap, that between the longest infrared and the shortest microwaves. This is the region of millimeter waves.

As the physicist pushes his spectroscopic measurements to longer and longer wavelengths, the energy available from his hot source of illumination becomes less and less intense. There is little energy per quantum, not enough to eject electrons, and sensitive photocells give way to heat-detecting bolometers which employ thin wires or films of metals or semiconductors, or to Golay cells which measure heat by the expansion of a small body of confined gas.

Because little energy is available in a given frequency range, carefully designed and efficient lamellar or echelon gratings must be used which conserve all that it is possible to save of the scant energy. Further, energy must be integrated or collected over periods of the order of a second, and measuring equipment becomes sluggish. Finally, at wavelengths of around 1,000 microns or 1 millimeter, infrared spectroscopy peters out.

To pursue their interest at still longer wavelengths, physicists must have more powerful sources of radiation. One possibility is to use incoherent sources of radiation whose properties are similar to the hot-body sources used in the past.

A 60-cycle a-c generator and a vacuum-tube oscillator are coherent sources; they generate a smooth sinusoidal signal of a single frequency. The radiation from an incoherent source consists of many short wave trains of random or unrelated phase. Mathematical analysis or measurement with a spectroscope or a frequency meter shows that such incoherent radiation covers a band of frequencies.

Incoherent Sources

Aside from hot bodies, the most familiar generators of incoherent radiation are spark-excited oscillators such as Hertz used in his original experiments. Indeed, P. Lebedew generated 0.6-mm waves with a spark oscillator at the University of Moscow in 1895 (Fig. 1), and in the 1920's Nichols and Tear generated 0.22-millimeter (220-micron) radiation with a similar device, thus invading the field of the long infrared with an electric generator. More recent spark generators have used tiny ball bearings bouncing between charged electrodes, or a stream of mercury droplets striking an electrode.

Mass radiators have also been used in the electrical generation of incoherent millimeter waves. From 1924 to 1929 Mme. Glagolewa-Arkadiewa of Moscow used a device in which metal particles suspended in oil were carried into a spark by a rotating wheel (Fig. 2) and obtained radiation of wavelengths ranging from 129 to 50,000 microns. Similar work has been carried out by Lewitsky (1924–27) and more recently by Cooley and Rohrbaugh (1945).

The exact mechanism of mass radiators seems somewhat in doubt. Recently H. A. Prime, following a suggestion of Frohlich, dropped copper powder through an arc and obtained enhanced radiation in the vicinity of an ionic resonance of the copper crystal.

Although spark generators or mass radiators might be used to extend the range of infrared spectroscopy, they suffer from the limitation of all incoherent sources.

WAVES

By JOHN R. PIERCE

Bell Telephone Laboratories
Murray Hill, N. J.

The spectroscopist wishes to measure absorption or reflection versus frequency. For finer detail, a spectrometer of higher resolving power must be used and a smaller fraction of the total radiation selected. Thus, the spectroscopist who uses an incoherent source must build a larger spectrometer which will have greater resolution, but he has less energy left to work with as he does so. He envies radio-frequency and microwave spectroscopists who have available sources (electron tubes) which are essentially monochromatic (single-frequency).

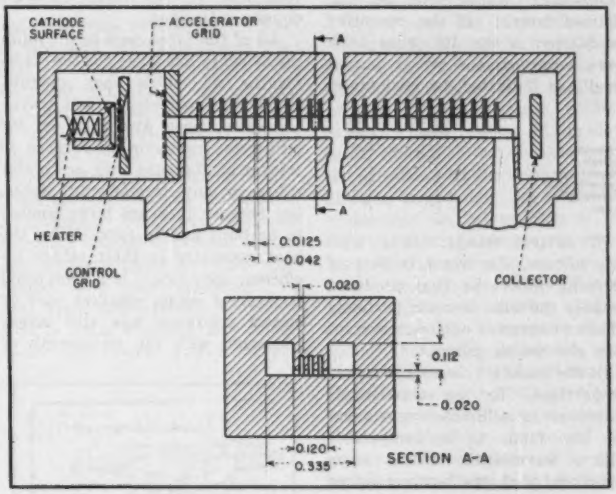

Cross-sectional view of a spatial-harmonic traveling-wave tube operating at 1.25 cm

Need Coherent Source

With a monochromatic or coherent millimeter source, physicists could obtain the higher resolutions they need to untangle the behavior of matter. Physicists are delighted that molecules in vapor form in the atmosphere and molecules of liquids and solids as well absorb millimeter waves for this enables them to study these molecules. Although this pronounced absorption of millimeter waves is something of a nuisance to communication engineers, it is not such as to rule millimeter waves out of consideration for short-range communication through the atmosphere or perhaps even for longer-distance communication through evacuated or gas-filled waveguides. Thus, both physicists and engineers are anxious to obtain electron tubes which will operate in the millimeter range.

Unfortunately, as electron tubes are made smaller to operate at shorter wavelengths, they are harder to build. Circuit losses increase as the square root of the frequency, an irremediable defect which can prevent some sorts of tubes from operating at all. The required small cathodes can scarcely furnish the currents necessary to make the tubes operate. Millimeter-wave tubes thus tend to be inefficient and short lived. But worst of all, the tubes can scarcely dissipate by conduction or radiation the large part of the electric input which is converted into disorganized heat rather than into millimeter-wave energy.

Spectrum Range

Curve *A* of Fig. 3 shows the characteristics of the radiation per cm² from a black body at a temperature of 5,000 Kelvin for infrared radiation. This is in a frequency range of one percent, which would allow a spectral resolution of one part in 100. Curve *B* is for the same black body at the same temperature but with radiation per cm² lying in a bandwidth of one megacycle, a broad band in terms of radio, but a narrow bandwidth in terms of spectroscopy.

The dotted region of Fig. 3 is intended to include, roughly, the average powers presently attainable with electron tubes, in an easily assimilable form. The spread is partly a confession of ignorance or uncertainty. However, at the shorter-wavelength end of the range the spread is such as to include the average power of pulsed tubes as well as that of c-w tubes. Pulsed tubes tend to have the higher average powers, but their radiation is not monochromatic; it covers a bandwidth of around a megacycle.

Electron tubes as millimeter-wave sources have an advantage beyond that of being monochromatic or coherent; they also give a power tremendously greater than that available from hot bodies for any reasonable bandwidth or resolution. The fact that physicists have been able to use thermal sources at all for measurements, even in the slightly submillimeter range, is a tribute to their care and ingenuity in making slow and painstaking observations.

The other striking feature is the rapidity with which the power output of tubes falls off at short wavelengths, see curves *C* of Fig. 3.

Suppose we consider an electron tube of a given type, say, a magnetron, which has a diameter D, which operates at a voltage V, a current I and a magnetic field B at a wavelength λ, and gives at that wavelength a power output P. Now

imagine that we made a magnetron just half as big in every respect. Suppose the circuit Q (or loss) were unchanged by this scaling (something which will be disclaimed later). If the operating conditions in the following table were observed, the power output would, as indicated, be unchanged.

	Original Tube	Scaled Tube
Diameter	D	$D/2$
Voltage	V	V
Current	I	I
Magnetic field	B	$2B$
Wavelength	λ	$\lambda/2$
Power	P	P

Of several things wrong with this picture, the worst is that of carrying away the heat produced because the tube is not a perfectly efficient converter of direct current into alternating current.

In the scaling process the size is proportional to the wavelength. Moreover, in millimeter-wave tubes the size tends to be comparable with a wavelength. For a given structural part, the heat conducted through it for a given temperature difference is proportional to the linear dimension. Curve *D* of Fig. 3 shows the power conducted through a copper cube a wavelength on a side for a temperature difference of 1,000 C.

Power can also be carried away by radiation, and curve *E* of Fig. 3 shows the power radiated from a black surface a wavelength square at 1,000 Kelvin. It is no coincidence that the available power tends to be low at short wavelengths, where the conducted and radiated powers are small.

Need for Large Tubes

A typical miniature pentode which can be used at a frequency of 500 megacycles is about an inch long. The grid is wound of wire 0.001 inch in diameter, and the spacing between cathode and grid is about 0.002 inch. The following table shows what the dimensions would have to be if the tube were scaled for operation at 6 millimeters (50,000 mc).

	500-mc Tube	50,000-mc Tube
Length	1 inch	1/100
Grid wire diameter	1/1000 inch	1/100,000
Cathode-grid spacing	1/500 inch	1/50,000

This is clearly ridiculous.

The vital circuit portion of a 6-millimeter traveling-wave tube of somewhat less power output scaled for operation at 500 mc, would be 6 inches by 17 inches in cross-section, and 17 feet long, which is equally ridiculous.

All of the tubes used in the millimeter range are large for the wavelengths at which they operate. Klystrons, magnetrons and traveling-wave tubes are used in the millimeter range in preference to triodes not because they are better tubes in any fundamental sense, but because they are large enough to be built and to carry away the heat generated in their rather inefficient operation. If a tube could be evolved whose smallest part or closest tolerance was still larger compared with the wavelength of



Basic circuit of a reflex klystron, an oscillator which has been used down to wavelengths of about 5 mm

operation, on these grounds, at any rate, it would be a good candidate for the millimeter region.

Besides matters of thermal dissipation and of ease or indeed feasibility of fabrication, two important considerations are cathode current density and circuit loss. If the current density rather than the current were kept constant in going to shorter wavelengths, the current itself would vary inversely as the square of the frequency, and the power would vary accordingly, if the tube would oscillate at all. Usually, a sort of compromise is made, and the cathode current density is raised in going to shorter wavelengths, but not inversely as the square of the wavelength. This compromise tends to degrade the performance of the tubes.

Coupled with this is the fact that the circuit loss varies inversely as the square-root of the wavelength. This, combined with compromises as to current density and feasibility of construction make it hard to build operable tubes of some types (notably, klystrons) for the millimeter range.

Pulsing offers a way out of this dilemma. Momentarily, cathodes will emit large currents, and while the temperature of the parts rises steadily during the microsecond or so of operation, the parts have a chance to cool down again in the interval between pulses. Finally, high-voltage tubes are larger and easier to build than low-voltage tubes, and pulsing enables one to go to high voltages as well as high currents.

Experimental Tubes

Some of the best tubes in the millimeter range have been pulsed magnetrons. The table below shows some of the results which have been achieved at the Columbia Radiation Laboratory.

Wavelength in mm	Peak Power in kw	Efficiency in percent
6.3	30–40	15–20
4.3–4.8	5–15	4–10
3.0	1–2	1–5

Even higher frequencies have been obtained as harmonics of the frequency oscillation, the shortest wavelength being 1.45 mm (207,000 mc), as the third harmonic of a 4.35 mm tube. The powers obtained are, however, very small.

The output of a pulsed tube consists of a band of frequencies of width inversely proportional to the pulse length. For some purposes a steady, single-frequency signal is desirable. So far, reflex klystrons have been chiefly used to produce continuous waves in the millimeter region. Tubes operating at several thousand volts have produced several tens of milliwatts at around 8 millimeters wavelength and a few milliwatts around 5 millimeters. Tubes operating at 400 volts have also operated at wavelengths a little longer than 6 millimeters. In this part of the millimeter range, however, resonator losses are so great that the tubes barely oscillate.

While no tubes are completely immune to the bad effects of circuit losses, some, like the traveling-wave

tube, suffer less than others. In a traveling-wave tube, a beam of electrons moves along near to a circuit which can guide a slow electromagnetic wave. The electrons are given a velocity nearly equal to that which the wave has in the absence of electrons. If the circuit or the electron stream is excited, the signal is found to increase in amplitude as it travels along the combination of circuit and electron stream. The signal always increases if the circuit and stream are long enough; loss merely makes the increase somewhat less.

Traveling-wave tubes have been built in many physical forms for many frequency ranges. In the millimeter range, gain has been obtained around 6 mm both with a tube using a helix or coil of wire as a circuit, and also with a more rugged circuit consisting of slots or resonators cut in a ridge of metal.

The traveling-wave tube can be regarded as made up of two systems, each capable of sustaining waves. One is the electromagnetic circuit, which can carry electromagnetic waves. The other is the electron stream, along which waves of charge density, velocity and potential called space charge waves can travel. When one system (the electron beam) moves with respect to the other (the circuit) at such a speed that the backward wave on the moving system is in synchronism with the forward wave on the fixed system, the waves interact or combine to form an increasing wave which gives gain. This suggests using two electron streams of different velocities rather than one electron stream and a circuit.

Possible Solutions

In the double-stream amplifier, two nearby or interpenetrating streams of electrons of different speeds interact to sustain a wave which increases in amplitude as it travels. This indicates a possibility of obtaining gain at millimeter waves without the fragile and lossy circuits which are used in other tubes. Unfortunately, circuits are still necessary to put the signal onto and take it from the electron stream. This, together with some difficulties in intermingling the electron streams, have so far stood in the way of making double-stream tubes for the millimeter range.

In the double-stream amplifier, the two streams of electrons are drawn from two cathodes held at different potentials. Experimental and theoretical work by Haeff, Macfarlane and others indicates that gain can be obtained when all the electrons come from one cathode, provided electrons in different parts of the stream have different velocities, as they do because of space-charge effects. Both beams of electrons traveling in the direction of a magnetic field, and electrons traveling normal to crossed electric and magnetic fields, as in the magnetron, have been considered. As yet, such single-stream amplification is little explored and imperfectly understood, and it is possible that substantial progress is yet to be made.



Electron paths in a magnetron oscillator, showing spokes formed by bunching effect of r-f fields of the anode

Another device related to the traveling-wave tube is the multiresonator klystron, in which a beam of electrons is shot past or through a series of uncoupled resonators and an increasing wave is so obtained. In one device, the easitron, the resonators are merely a series of half-wave wires, arranged like the rungs of a ladder.

The operation of the traveling-wave tube may be related in some way to the phenomenon of Cherenkov radiation. This radiation takes place when a charged particle moves through a medium at a speed faster than the velocity of light in that medium. In traveling-wave tubes the electrons travel faster than the increasing wave. No more detailed comparison has been worked out. It has been proposed that Cherenkov radiation of electrons traveling close to the surface of a dielectric might form a source of millimeter wave power.

One scheme has been called the "relativistic doppler" method of generating millimeter waves, on which Coleman at MIT has been working. Electrons which oscillate back and forth radiate. If the electrons move toward the observer, the frequency of the received radiation is larger than the frequency of electron oscillation; this is the doppler effect. Suppose a stream of high-velocity electrons is shot between the poles of a series of magnets which alternately produce magnetic fields in opposite directions. These fields deflect the electrons back and forth (normal to the direction of motion) at a high frequency as the electrons travel.

Electromagnetic waves of an even higher frequency will be generated and radiated in the direction of electron motion. Fortunately, it turns out that most of the radiation lies in a narrow cone in the direction of electron motion. While some radiation will be obtained from the individual electrons of a smooth beam, the radiation is greater if the electrons travel through the magnetic field in groups or bunches, and hence it is planned to bunch the electron beam as in a klystron before it enters the magnetic field.

Electrons which circle in a magnetic field radiate at harmonics of the rotational frequency, and this radiation has been suggested as a source of millimeter waves. Finally, various combinations of electron acceleration and slowing of waves by dielectrics have and will be considered.

While the most pressing problem in connection with millimeter waves is that of generation, there are other problems as well. Methods of detection must be somewhat different from those which are used at longer wavelengths. Competing means of handling millimeter waves such as optical, waveguide, and others must be worked out and evaluated. Finally, there is the field of application, in spectroscopy, in communications and in radar.

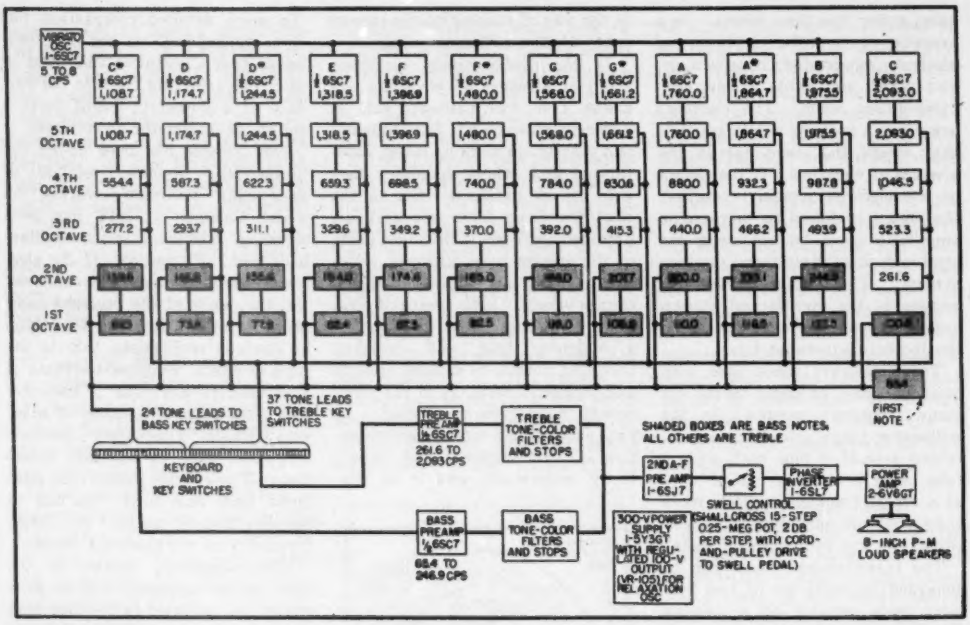

GAS-DIODE ELECTRONIC

Chains of sawtooth tone generators using 10-cent neon lamps are synchronized to master oscillators for frequency control. Undesired harmonics are removed with tone filters to give five octaves of organ-like music with two vibrato stops and six tone-color stops

ELECTRIC-KEYBOARD musical instruments may be classified into two main groups according to their means of tone production: (1) electromechanical generators; (2) electric-circuit generators. Mechanical systems are either rotary or vibratory. Both means have been used to modulate electrostatic or magnetic fields or beams of light. Electric circuit types have employed both vacuum and gas-tube oscillators as tone generators.

Designers of new instruments have either imitated existing instruments or have devised completely new pleasing tonal qualities and controls. However, one of the greatest complaints against electric instruments is that they are generally too perfect, and therefore unnatural. Variation is the essence of musical expression and variations in pitch, loudness, tone color and vibrato should be within easy control of the musician. On the other hand, too many controls confuse or discourage the performer. In general, new instruments should be easily operated by masters of similar existing instruments.

It was required to develop an organ-like electronic instrument that would retail for $800, whereas the cheapest all-electronic organ then available sold for about $3,000. Since mechanical economies in the design and construction of the console and keyboard would classify the equipment as a toy rather than a musical instrument, it was necessary to retain the standard form of the other low-priced organ-like instruments. The main savings were effected in parts and production costs, with minimum sacrifice in performance. A standard organ keyboard of five octaves or 61 notes covering the range from C 65 to C 2,093 cycles is used. The controls consist of eight organ stops; two are used to select vibrato rates and the remaining six are for tone color. A swell pedal is provided for output level or volume control.

The cheapest double-triode vac-

FIG. 1—Arrangement of stages in complete organ. Frequency value in cycles is given for each master oscillator (top row) and each of the 61 synchronized NE-2 neon-tube relaxation oscillators comprising the five octaves. Shaded boxes represent bass notes

TOP: Complete organ being played; CENTER: Rear view of console, showing general arrangement of electronic units; BOTTOM: View of chassis containing the twelve master oscillators and twelve octave chains. Total tube complement is eight 6SC7, one 6SJ7, one 6SL7, two 6V6GT, one 5Y3GT, one VR105 and 61 NE-2 neon diodes

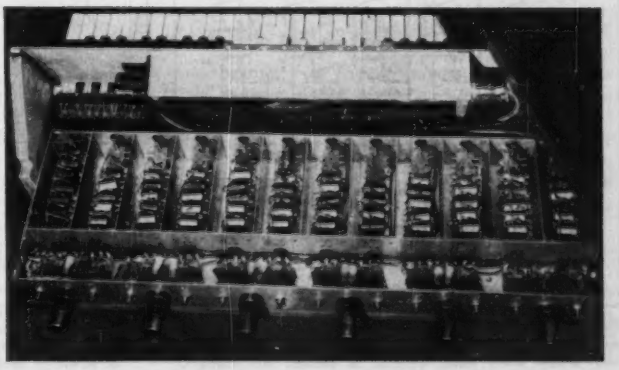

ORGAN

By ROBERT M. STRASSNER
Monterey Park, Calif.

uum tube, the 6SC7, lists for $2.00. The cheapest gas diode, the NE-2, lists for 10¢. For this reason, gas-tube methods of tone generation were thoroughly investigated. As it happens, the sawtooth waveform of the gas-discharge relaxation oscillator has a high harmonic content, permitting wide variation in tone color by removing the undesired harmonics with suitable filters. The main difficulty was, of course, with frequency stability.

Actual Design

The block diagram of the complete instrument is shown in Fig. 1. The twelve separately-tuned master oscillators generate continuously

the twelve frequencies for the highest of the five octaves provided. For each master oscillator there is a chain of sawtooth tone generators, the first of which is synchronized to the fundamental frequency. Only these harmonic-rich sawtooth generators feed the preamplifiers and tone-color filters; the master oscillators serve only for frequency control and are not heard.

Each master oscillator synchronizes its corresponding submultiple notes in cascade fashion. Of course, octave submultiples are the only frequencies that may be synchronized in a musical instrument, since the others are not exactly related in the equally-tempered scale.

The 61 sawtooth tone generators are continuously in operation, with all their output leads terminating at the keyboard switches. Twenty-four of the generators feed the bass preamp, and the remaining 37 feed the treble preamp. When the musician depresses one or more keys, the corresponding key switches send the tonal combination to the treble and/or the bass preamp. Stops at the control panel select the desired combination of tone color. The bass and treble tone-color filters then separately modify the upper and lower portions of the keyboard and inject their combined outputs at the second preamp grid. The input level to the phase inverter is controlled by a step potentiometer operated by the foot of the performer. The signal continues through the power amplifier to the dual-speaker combination.

The main factors affecting the frequency stability of gas-discharge oscillators were found to be applied voltage and incident light. Voltage was readily stabilized within 2 percent with a VR105 regulator tube. It was necessary to introduce a small amount of light for proper operation at the lower frequencies. This effect was accomplished by placing ordinary six-volt dial lights near the low-frequency gas diodes.

The necessary additional stabilization was obtained by subjecting the tubes to a small electrostatic field at the controlling frequency. By using a portion of the output from one oscillator whose frequency was already under control to synchronize another at a submultiple frequency, octave divider chains were developed. Three or four turns of hookup wire provided sufficient coupling for reliable control within plus or minus 10 percent of the free-running frequency.

Figure 2 shows a typical octave-divider chain. The charging capacitors for the first three stages are connected so that the output voltage to the treble preamplifier approaches −100 volts according to the relation:

$$V = 100\,(1 - e^{-t/RC}) \qquad (1)$$

The time for discharge is extremely short compared with the time required for the voltage to increase from the extinction voltage V_e to the ignition voltage V_i, so that the free-running frequency of oscillation is mainly a function of the difference between these two voltages[1]. Substituting V_e and then V_i for V and taking the reciprocal of the difference between the two corresponding values of t, the frequency of oscillation becomes

$$f_o = \frac{1}{RC \ln \left(\frac{100 - V_e}{100 - V_i}\right)} \qquad (2)$$

This expression is approximate because V_e and V_i are themselves affected by frequency, incident light, temperature and magnitude of the discharge current.

At the point of ignition, in the first three stages, the output voltage rises very quickly to +100 volts. The last two tubes in the chain, V_4 and V_5, are connected so that a positive-approaching sawtooth is produced. It was found that the steep time rise at the point of discharge in the negative sawtooth is much more effective in controlling the positive-sawtooth generators than other combinations. Because the lowest frequencies are the more difficult to control, the last two tubes in the chain are both controlled by the steep negative sawtooth. The first three tubes in the chain, V_1, V_2 and V_3, are controlled directly by the master oscillator.

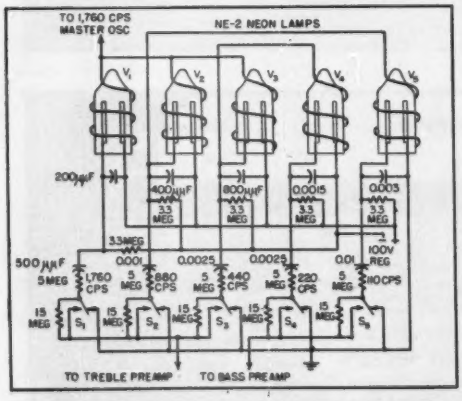

FIG. 2—Example of octave divider chain. For 6-note C chain, sync signals are injected in slightly different order so that the two lowest notes (most difficult to control) are triggered



FIG. 3—Neon-lamp test and aging circuit for improving stability of sawtooth oscillators



FIG. 4—Typical master oscillator circuit, with component values for the 1,760-cps chain

The charging resistance was adjusted to about 3.3 megohms in all cases. This value represents a compromise between higher values, which would be more unstable against temperature variations and would limit the discharge current, and lower values that operate the tube too near the border between oscillation and continuous glow. For all other factors remaining constant, Eq. 2 shows that if R is increased, C must necessarily be reduced if frequency is to remain constant. A reduction in C means less energy storage in the capacitor and therefore less discharge current. If R is too low, the charging current will be so high that the tube is unable to extinguish at the completion of capacitor discharge, which results in continuous glow.

Switches S_1 through S_8 are mechanically linked to the playing keys. When in the up position, these switches ground the outputs of all unplayed oscillators and also parallel the 15-meg resistors from grid to ground of the preamps, giving 0.625 meg and 0.405 meg respectively at the bass and treble inputs. As a key is depressed and the ground connection removed, a 28-db loss of available oscillator output for bass notes and 31-db loss for the treble is momentarily sent to the preamps. When the key has completed ¾ of its stroke, the 15-meg resistor is shunted, thereby allowing playing level. In this manner the loud transient click that would otherwise be present has been almost completely eliminated.

Despite these precautions against transients, key switches with silver alloy contacts caused considerable clicking. Evidently these high-impedance circuits were extremely sensitive to the slightest oxide coating at the contacts. Even the best silver forms a slight coating under normal conditions. The final switches were formed from Nichrome V wire. Clicking was unnoticeable and these switches have maintained their characteristics for a long period of time.

After the first experimental model had been in use for several months, a few oscillators drifted out of their range of control. It was determined that an aging process within the tubes had taken place. It was observed that the glow in troublesome tubes was irregular and unevenly spread over the electrode area. When these tubes were tested as positive and negative peak clippers in the circuit of Fig. 3 (switch S open), they failed to produce square and symmetrically clipped sine waves. When the switch was closed for several seconds, allowing about 200 ma to flow, the glow started unevenly but gradually spread over the entire area of both electrodes. At the completion of this spread, the switch was opened because continued application of this high current overheats the electrodes and destroys their photosensitive coating. After proper aging, the wave is always symmetrical and squarely clipped. Uniform characteristics throughout the remainder of their life were thereby assured. The experimental model has remained in synchronism for well over a year.

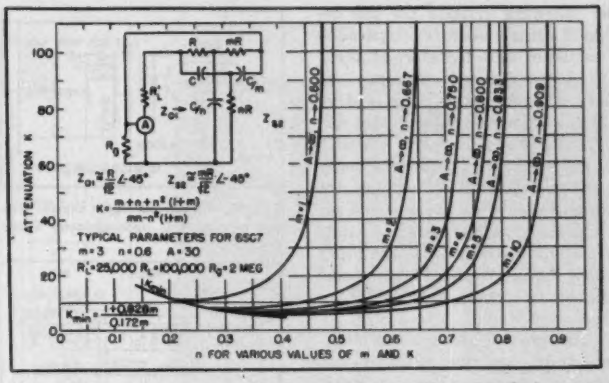

FIG. 5—Design curves for determining parameters of parallel-T networks in master oscillators

Master Oscillators

At the frequencies corresponding to the twelve notes in the highest octave, twelve stable oscillators were used to control eleven chains of five notes and one of six to account for the extra C at the low end. Because of its high stability and low parts cost, the parallel-T circuit was chosen. Stabilities of 0.1 percent are possible without supply-voltage regulation. Since only one triode per oscillator is required, two master oscillators may be housed in one double triode tube. Typical circuit constants of the A-chain master oscillator are shown in Fig. 4.

To aid in determining the parallel-T network parameters, the curves for Fig. 5 were plotted from equations already derived[3]. This presentation assumes zero generator impedance and infinite load impedance. Therefore, the network open-circuit input impedance Z_{o1} should be much greater than the generator impedance R_1' and its short-circuit output impedance Z_{s2} should be much less than the load impedance R_3 in order that the network balance conditions be least disturbed. After stage gain A has been determined by the tube and load resistor selected, n is a function of A for various values of m may be read directly from the curves.

For sustained oscillation, network attenuation K must be less than stage gain A. If there is no loading on the network and constants are to exact tolerance, K could be taken equal to A. This is, of course, impossible and for reliable operation, K should not be more than one-half A. In most of the literature on the subject, m is taken equal to one.[3,4] It should be noted that increased selectivity as well as decreased K occurs as m is increased.

The more common method of increasing selectivity is to increase A only. With high-mu triodes the upper limit on A is about 35, so that if additional selectivity is desired, increasing m is a convenient method. With these limits in mind

the following criteria for the design of a single-stage triode parallel-T oscillator were therefore adopted: (1) A was determined from μ, R_L and r_p; (2) K was set equal to $A/2$; (3) the highest value of m that will allow Z_{in} to remain much less than R_g was selected; (4) Z_{in} was made much greater than R_L'; (5) at the chosen value of m, n was found for K calculated above; (6) only points well above the K_{min} curve and below where K changes rapidly with small changes in n were used; (7) $C = 1/\omega R$.

Although the design was time-consuming and the required low-tolerance components are expensive, the production cost per oscillator is less than for other types and stability is comparable with a laboratory standard.

Vibrato Oscillator

Vibrato in most musical instruments is produced by combined frequency and amplitude modulation. However, a rather pleasing effect may be obtained from frequency modulation alone. Figure 6 shows the vibrato oscillator, which is a standard four-section phase-shift variety.[5] Frequency is adjusted to about six cycles per second and is controllable at the stop tabs by simultaneously varying two of the 1-meg resistors in the phase-shift network. Oscillator output is injected through the 2-meg resistors shown in Fig. 4 to the grids of all master oscillators. The extent of the frequency swing or vibrato depth is determined by the amplitude of the injected voltage.

Tone-Color Stops

The raw sawtooth waveform from the tone generators could hardly pass for music because of its improper harmonic distribution. After this sawtooth has passed through filter circuits that alter its harmonic structure, many pleasing tonal effects are obtained.

The highest note on the keyboard of this instrument is the 32nd harmonic of the lowest. A low-pass filter designed to remove certain harmonics of the treble notes would have negligible effect on bass notes. In like manner, another low-pass filter with a much lower cutoff point would be very effective in coloring bass notes and yet completely attenuate the treble section. If uniform tone color were required, a separate filter for each tone color of each note would be needed. However, few instruments have the same tone color throughout their range.[6,7] A satisfactory tonal balance was obtained by splitting the keyboard at middle C (261 cycles). Two filter sections were provided. The 24 notes below middle C were routed to bass stops or filters and the 37 above to treble stops. When a bass note is played and a bass stop is closed, a tone is produced that in pitch is determined by the note played, in color is designated by the stop closed and is at a level depending on the setting of the swell pedal. Figure 7 shows circuit constants of the tone color unit. One filter in each section is a resonant band-pass type designed to act as a formant-producing element. (Formants are caused by boosting partial tones around a particular resonance frequency.) The others are ordinary R-C networks. These combinations produce horn, string and reed effects. Large amounts of insertion loss were deliberately incorporated in each network in order that output level would be noticeably increased as more stops were closed.



FIG. 6—Vibrato oscillator circuit. Output frequency is approximately 6 cps



FIG. 7—Bass and treble tone-color filters, each using half of the 6SC7

Choice of Speakers

The distortion of the 8-watt amplifier used was held to a minimum consistent with parts cost, but best speaker performance (oddly enough) was realized with one of the least expensive combinations tested. The final choice was a pair of 8-inch p-m speakers, one with a hard cone resonating at 150 cycles and the other soft for a 75-cycle resonance. When these were operated in parallel, their reciprocal damping effects appeared to reduce overall resonance and distortion to a low degree. An 8-watt test signal that produced objectionable distortion in a 25-watt high-fidelity speaker supplied by a prominent manufacturer was easily handled by the 10-watt combination used. The dual system was also chosen because it allowed a more uniform dispersion than could be realized from even a large single speaker.

Conclusions

It was pointed out that the purpose of this project was to design a low-cost, easily-operated organ-like instrument. Low manufacturing cost was accomplished by using inexpensive tone generators whose tiny size lend themselves to small identical subassemblies. Pleasing tone color was the main standard of performance. To this end, comments on the results of listening tests by many musicians and engineers have been most gratifying. Provided reasonable care is exercised in the selection of capacitors and resistors in the parallel-T networks, the instrument should remain in tune indefinitely. Eight organ stops provide 196 combinations of tone color. Any person able to play keyboard instruments can play this instrument with little or no practice.

References

(1) H. J. Reich, "Theory and Application of Electron Tubes," p 454, McGraw-Hill Book Co., New York, 1944.
(2) H. S. McGaughan, Variation of an RC Parallel-T Null Network, *Tele-Tech*, p 48, August 1947.
(3) W. G. Shepherd and R. O. Wise, Variable Frequency Bridge-Type Frequency-Stabilized Oscillators, *Proc. IRE*, p 256, June 1943.
(4) A. B. Hastings, Analysis of a Resistance Capacitance Parallel-T Network and Applications, *Proc. I.R.E.*, p 126, March 1946.
(5) L. Stanton, Theory and Application of Parallel-T Resistance Capacitance Frequency Selective Networks, *Proc. I.R.E.*, p 447, July 1946.
(6) S. K. Lower, "Electronic Musical Instruments," *Electronic Engineering*, 1948. This monograph has an extensive bibliography and lists American and British patents.
(7) B. F. Miessner, Electronic Music and Instruments, *Proc. IRE*, p 1,427, Nov. 1936.

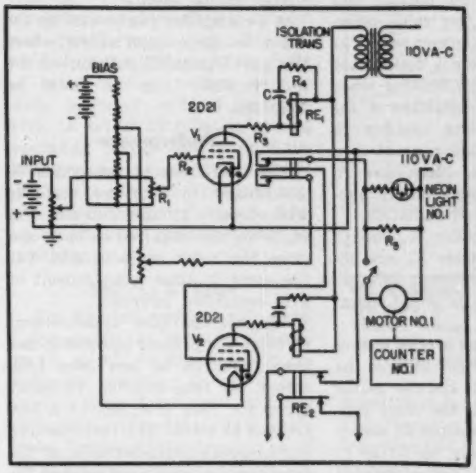

FIG. 1—Simplified schematic diagram of thyratron circuit. Fairly-sensitive, fast-operating standard telephone relays having coil resistances from 2,500 to 14,000 ohms have been used successfully

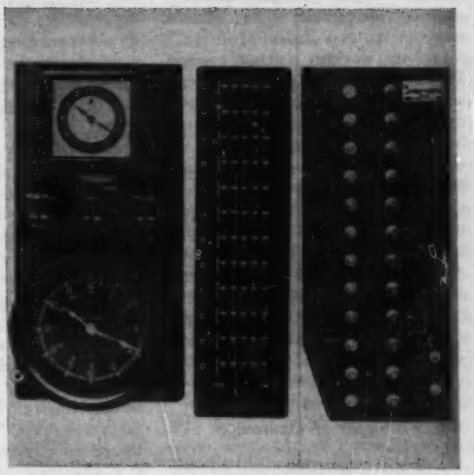

Mechanical counters (center) show total time signal exceeds each of twelve values as selected and indicated by potentiometers and neon lights in control unit (right). Clock panel is at left

Signal Strength Analyzer

System of thyratrons and mechanical counters automatically totals amount of time that any changing d-c voltage exceeds each of twelve chosen values. Provides greater accuracy at fraction of cost and complication of other methods

By RALPH W. GEORGE

Radio Corporation of America
RCA Laboratories Division
Riverhead, New York

CERTAIN RADIO PROPAGATION studies require continuous records of the percent of time a signal is above, or below, selected values over a range of variation. For example, in measuring television signal strength, it is important to know what percentage of time a usable signal can be received in a certain location.

One method for determining this voltage-time information involves the time-consuming process of going over signal strength recorder charts and adding up the time intervals during which the signal exceeds each level step. The automatic method described here accomplishes the same purpose with improved accuracy and with considerable economy, as compared to other methods. Other applications for the basic principle involved can probably be made to advantage.

The equipment gives a direct reading of the total time that a fluctuating voltage exceeds each of twelve selected values. The total time for each signal level may be read at any desired time interval.

The analyzer is designed for long-term operation. Calibration drift is inherently small. The equipment consists of two units, a control unit and a minute counter unit, the latter showing the total time in tenths of a minute on a separate counter for each voltage level. The counter-operating input voltage is determined by the bias on a miniature type thyratron with associated relay in the control unit. A separate permanent-magnet type synchronous motor, chosen for its fast starting and stopping characteristics, drives each counter.

In laboratory tests, average time measurement errors per on-off cycle have been measured as low as 0.01 second using square-wave keying on one circuit. Under more normal operating conditions, as with an input voltage changing at the rate of about 0.5 volt per second, the error may be as large as 0.1 second per on-off cycle. Test runs were made over various periods of time, from 40 minutes to 24 hours

using one on-off cycle per minute.

Input impedance of the control unit is on the order of 1 to 2 megohms, working against ground. When all the thyratrons are cut off, corresponding to maximum input, the input impedance is determined by the overall impedance of the wiring and components to ground. The minimum range of input voltage depends on the use. For signal propagation studies it appears to be on the order of 0 to −15 volts. A larger voltage range will, in general, reduce errors in measurement. Source impedance of the input should be as low as possible and preferably should not exceed 50,000 ohms.

Principle of Operation

The basic functions will be described with reference to the simplified diagram shown in Fig. 1. Thyratron V_1 is the first tube to be cut off as the input voltage is raised above zero. A fixed negative bias of something less than 2 volts is obtained from the bias supply and adjusted by means of potentiometer R_1 so that an input voltage of the desired value (assumed to be less than 1 volt) will cut off V_1.

This de-energizes RE_1 which does the following: (1) turns on the synchronous motor driving counter No. 1, (2) turns on the neon light No. 1 to give a visual indication of operation, and (3) connects the input circuit to the grid of V_2. Tube V_2 has a higher positive bias than V_1, hence requires a higher input voltage to cut it off. This operating sequence is carried through 12 stages.

The bias system shown permits an independent and wide range of choice of the input voltage required for operation of each stage. The orderly sequence of operation must be preserved. The fixed bias divider may be eliminated by the use of suitable taps on the bias battery.

Only one thyratron in the conducting condition, which is the only condition in which appreciable grid current can flow, is connected to the input circuit at any time. This fact, and grid resistor R_2, keep the maximum grid current flowing in the input circuit down to less than one microampere for normal bias adjustments of a few volts difference between adjacent stages. The conducting condition is maintained by leaving the grids floating when the tubes are not connected to the input circuit. Plate resistor R_3 limits the peak plate current to a conservative value. Resistors R_3 and R_4 are also important in suppressing spurious r-f radiation.

The smoothing filter R_4 and C_1 and the series resistor R_5, are adjusted to give a minimum differential in grid voltage for on-off operation of the relay.

Stray a-c coupling in the wiring is likely to be sufficient to light the neon light when the counter motor is disconnected and the relay contacts are open. Resistor R_6 serves to reduce this voltage, by virtue of the relatively high impedance of the source, to a value insufficient to break down the neon.

The circuit in Fig. 1 can be modified to operate with substantially the same characteristics for a zero to positive input voltage. In this case, the motor-control contacts should be closed when the relay is energized and the grid to the preceding stage should be opened. With zero input voltage, the grids would all be connected to the input and biased beyond cutoff.

A d-c amplifier can be used on the input in those applications where the added instability factor of the d-c amplifier can or must be tolerated.

Performance

The usefulness of the system is determined by (1) its stability with time, (2) the difference in input voltage required to open and close the relay contacts, and (3) the error in time measurement of grid controlled intervals.

The average time measurement error of the present equipment has been found to be less than 1/50 second per time interval, or on-off cycle, for time intervals of a few seconds or more. The fast starting and stopping characteristics of the synchronous motor used account for the small error. This motor has a low-inertia rotor, revolving at 100 rpm, which is damped by a permanent magnet in the field. The above time measurement error will not be detected except with square-wave input.

For maximum long-term stability of this system, the plate supply should be regulated. The 2D21 is relatively insensitive to ±10 percent change from normal heater

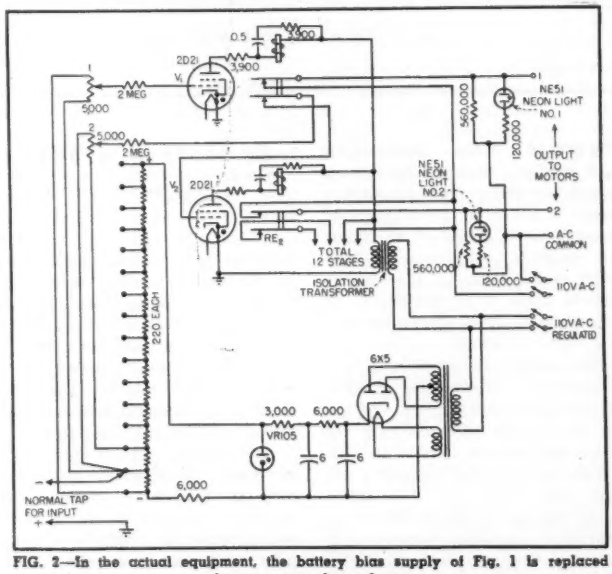

FIG. 2—In the actual equipment, the battery bias supply of Fig. 1 is replaced by an a-c supply as shown

voltage. The tube is operated at conservative values of plate current and should have a long life. The grid operating voltage of the 2D21 is satisfactorily constant over a wide range of ambient temperature. A set of 12 tubes in normal operating service has given satisfactory and trouble-free service during the past year. The bias supply and all resistors must be kept as constant as possible under all conditions.

Sources of Error

The inherent errors in this measuring system can be made relatively small, as will be illustrated in the following example. Assume a calibration error of ±0.1 volt including operating differential and drift, and a desired maximum error of 0.5 db in a signal recording application. This implies that a change in receiver input of 0.5 db must result in a change of not less than 0.2 volt in the receiver output.

To cover a wide range of signal fading, the receiver output should be a logarithmic function of the input, in which case the output change will be 0.4 volt per db change of input. If the system is calibrated in 6-db steps, starting at 6 db above 1μv per meter for instance, the 12 steps in the analyzer will accommodate a range of 72 db and require a maximum input voltage of 28.8 volts. In such practice, it is desired to operate the lowest-level stage as low as possible if very deep fading is to be encountered.

The calibration error assumed in the above example is conservative and may be much lower under favorable conditions. During a 7-day test the input voltage required to operate the relay, including the operating differential, was constant to within ±0.06 volt. The line voltage was not regulated and varied between 107.5 volts and 110 volts.

Less than 5 percent of over 100 type 2D21 tubes tested were found to have an appreciable change in operating grid voltage depending on the time the tube was previously in the conducting or nonconducting condition. A half-minute in each condition before checking the on-off operating grid voltage has been sufficient to show this fault.

Hum pickup in the grid circuit of the 2D21 thyratron must be kept at a minimum for optimum operation. This requires some care in the arrangement of the input circuit and wiring The relay should also be so arranged that a separate stack of contacts is used exclusively for switching the grid into the input circuit.



FIG. 3—Separate on-off motor switches are used to eliminate common a-c coupling through motors which would cause all neon lights to light when any motor control relay is closed

Control Unit

The circuit diagram of the control unit, Fig. 2, is essentially an expansion of Fig. 1 to include the necessary switches, power transformers and an a-c operated bias supply to replace the bias battery used in the simplified version.

A floating, a-c operated, regulated bias supply is used. This supply introduces some hum in the input circuit. The source of this hum is of fairly high impedance and therefore has more serious effects when a high-impedance signal input source is used.

In some cases the hum has been reduced by introducing a compensating voltage to ground from one of the transformer windings not connected to the bias circuit. The electrostatic shield was found to be useless in these transformers. The choice of the a-c plug polarity influences the hum and therefore has an effect on the relay operation and operating differential. An average operating differential not exceeding 0.1 volt was obtained with a 50,000-ohm input signal source.

Tube noise in a signal recording application may give an annoying variation in the signal input operating voltage and operating differential. This is particularly troublesome with weak signals and high receiver gain. A partial remedy may be had in the use of a low-pass filter in the diode output of the receiver. In this case the resulting slower response of the analyzer must be taken into consideration.

Counter Unit

The counter unit is usually turned off when making calibration adjustments on the control unit. Each motor in the counter unit (Fig. 3) must be disconnected separately to eliminate a common a-c coupling through the motors, which would cause all neon lights to be lighted when any motor-control relay contact is closed.

With five wheels, each counter will register a total of 9,999.9 minutes, or about 166 hours. Zero can be reset manually if desired.

Each counter is driven by its respective motor through a gear system giving a speed reduction of 100 to 1, so the right-hand counter wheel rotates at 1 rpm and reads direct to 1/10 minute. The numbers on the counter wheels are about ¼ inch high. The loads on the motors are so light that they are capable of starting and running backwards if there is a slight chatter in the closing of the relay contacts. This was avoided by means of a simple ratchet stop engaging 4 teeth cut in the hub of the worm mounted on the motor shaft. Thus, if started in reverse, the motor is stopped in not more than ¼ revolution at which point it starts in the forward direction. The maximum resulting error, which will occur rarely, will be about ½ revolution or 0.3-second time lost.

The compact arrangement of the counter unit permits as many as 3 counter units, and a panel containing reference time clocks, to be set side by side so that a photographic record of three measuring systems can be made with one camera. Signal-strength recording systems in use at present employ a 16-mm movie camera with an exposure rate of 1 frame every hour. A synchronous, motor-driven timer turns on flood lights a few seconds before operating the camera shutter. A 7-day clock and a 60-cycle line-controlled clock are used so that errors due to power failures will be apparent.

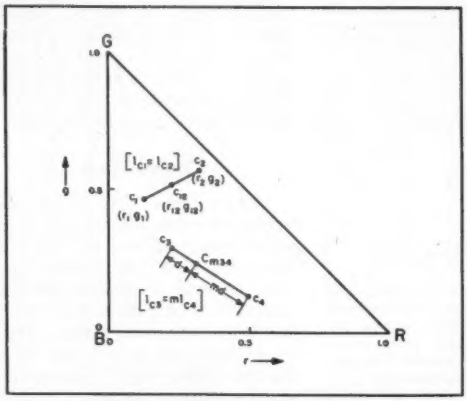

FIG. 10—Color mixture properties of the RGB chromaticity diagram. When two colors are combined, the point representing the mixture color lies on the line connecting the points representing the two combined colors

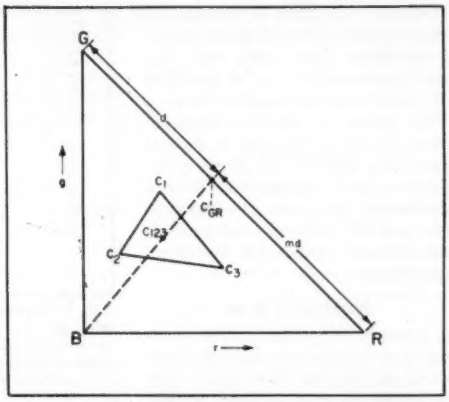

FIG. 11—Color mixture when three colors are combined. If the colors are present in equal amount, the mixture color falls on the center of gravity of the triangle. Dashed line represents finding mixture of primaries to match a given color

COLOR FUNDAMENTALS

In this second installment, the color mixture properties of the RGB chromaticity diagram and its transformation to the XYZ form are described. The spectral locus is identified, and the color gamut covered by three primaries is investigated. Specification by dominant wavelength is defined

By DONALD G. FINK
Editor, ELECTRONICS

DERIVATION of the RGB chromaticity diagram in terms of colorimeter measurements was outlined in the previous installment. This diagram represents the hue and saturation of all colors that can be matched by combinations of the selected primary colors R, G, and B.

Mixture Colors on the RGB Diagram

The RGB chromaticity diagram, in addition to providing an array of points whose coordinates represent the hue and saturation of every color capable of being matched by the selected primaries, constitutes a highly useful basis for computing the hue and saturation of mixture colors arising from the additive mixture of any number of other colors.

To show the method of combining colors, consider two colors, c_1 having coefficients r_1, g_1 and c_2 described by r_2 g_2 (Fig. 10). When these two colors are added, *in equal amount*, ($l_{c1} = l_{c2}$) and the resultant mixture color c_{12} is matched against the selected primaries in a colorimeter, as described in Part I, it is found that the coefficients of the mixture color are

$$r_{12} = \frac{r_1 + r_2}{2} \qquad (5)$$

and

$$g_{12} = \frac{g_1 + g_2}{2} \qquad (6)$$

As shown in the diagram, the point representing the mixture color c_{12} is located at the center of the line joining c_1 and c_2.

Similarly if colors c_3 and c_4 are mixed in unequal proportion, such that the flux l_{c4} is m times the flux l_{c3}, the mixture color c_{m34} lies on the line joining c_3 and c_4, but the distance from c_4 to c_{m34} will be m times the distance from c_3 to c_{m34} shown in Fig. 10.

This material is taken from Chapter 8 of the forthcoming second edition of "Principles of Television Engineering," and is reproduced by permission of the McGraw-Hill Book Co., Inc.

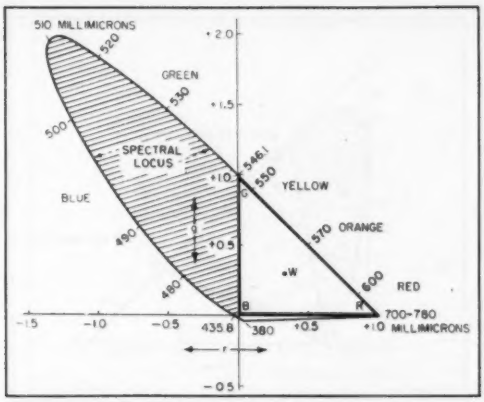

FIG. 12—The spectral locus, shown on the RGB diagram, represents the color coordinates of each color in the spectrum. Numbers on locus indicate corresponding wavelengths

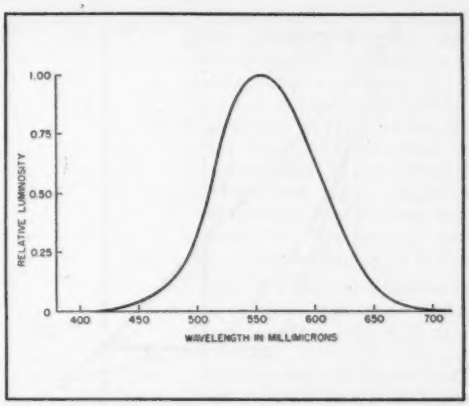

FIG. 13—Relative luminosity of the spectrum colors, as defined by the I.C.I. standard observer. This curve can be used to compute the relative luminosity of different primary colors

for TV Engineers

PART II of a series

When three or more colors are combined, they may be taken in pairs, each pair in the manner of c_1 and c_2, above. The mixture color c_{12} of this pair is then combined in the same manner with c_3 to find a third mixture color c_{123}, and so on until all the colors are combined. The same point is ultimately reached, regardless of the order in which the colors are combined.

Figure 11 shows a typical example involving three colors in a mixture. The mixture color c_{123} lies at the center of gravity of the triangle formed by c_1, c_2 and c_3 when all are present in equal amount. When the component colors are present in unequal amount, the mixture-color point lies within the triangle, but the color point is displaced toward the predominant color point or points.

The process of combining primary colors to find the resultant mixture color can, of course, be reversed, so as to find a combination of primary colors which will match a given color. In this case, there is an infinite number of possibilities depending on the relative amounts of the primaries taken. A typical case is shown in Fig. 11. In this case, a line (shown dashed) connecting one primary and the color to be matched is extended until it strikes the opposite side of the triangle RGB. The point of intersection with this side represents a mixture color of the remaining two primaries. The inverse ratio of distances from the intersection point to the apexes gives the relative amount of each of these primaries required to complete the match.

The Spectral Locus on the RGB Diagram

The RGB diagram described has been set up using the I.C.I. standard primaries*, which are spectral colors. Other spectral colors can be located on the diagram, and the line passing through all the spectral points is known as the *spectral locus*. Figure 12 shows this locus, with the wavelengths of the various spectral hues marked on it. It will be noted that the left-hand portion of the figure (shown shaded) lies outside the triangle RGB. This means that the corresponding spectral hues (the saturated blues and greens) cannot be matched by combining the three selected spectral primaries. Rather, these spectral colors can be formed only in desaturated form by combinations represented by points within the triangle RGB. This limitation of matching with primary colors is not a serious matter, because highly saturated green and blue colors represented at the left of the line BG seldom need to be reproduced with high accuracy.

The procedure for finding a point on the spectral locus is as follows: Consider the spectral light of wavelength 500 millimicrons.

To find the corresponding quantities r, g, b in Eq. 1-3, Part I, we must perform two color matches, one between the primaries and the equal-energy standard white, and the other between the primaries and the 500-millimicron spectral hue, the amount of flux l_w of the white light being equal to the flux l, of the spectral hue.

* A similar diagram can be based on any three primaries, spectral or otherwise, saturated or desaturated, provided only that each primary cannot be matched by a combination of the other two. If one can be matched by the others, the triangle degenerates into a straight line.

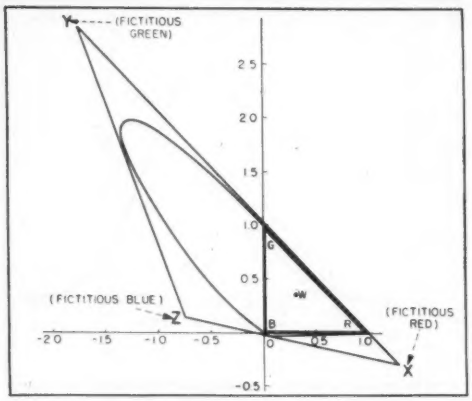

FIG. 14—To transform RGB diagram, triangle XYZ is circumscribed about spectral locus as closely as possible (compare with Fig. 12). Locations of points X, Y and Z are chosen to simplify calculations

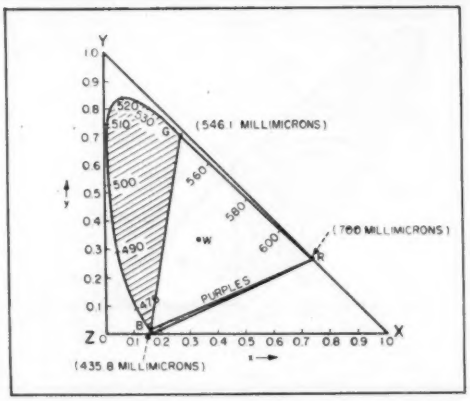

FIG. 15—By use of three linear equations, diagram in Fig. 14 is transformed to XYZ diagram, shown here, thereby eliminating negative values of quantity r. Triangle RGB assumes new shape, but retains color mixture properties of Fig. 10 and 11

The first step is to convert from the power units to light units, that is, to convert from watts to lumens. This conversion is performed with the aid of the "relative luminosity curve", shown in Fig. 13, which gives the response of the normal eye (that of the I.C.I. standard observer) to a given amount of energy of each wavelength in spectrum. The area under this curve is proportional to the number of lumens (l_w) produced by a given number of watts of the equal-energy standard white light.

From the same curve we can find the relative luminosities of the standard I.C.I. primaries; these are in the ratio red: green: blue = 1.0:4.6:0.06. Finally, from Fig. 8 (Part I), we can find the relative amounts of the standard primaries required to match the 500-millimicron spectral hue. These are in the ratio red: green: blue = −17:0.40:0.17. Taking the luminosities in corresponding pairs to form the ratios l_{rc}/l_{rw}, l_{gc}/l_{gw}, and l_{bc}/l_{bw} in Eq. 1–3, we can find the values of r and g from these equations and thus plot the point for the 500-millimicron spectral hue. The negative amount of red light required in the match places the point to the left of the line BG, that is, r has a negative value.

The RGB diagram, with the spectral locus, can be used as the basis of color specification, were it not for the fact that the saturated blues and greens lying between the spectral locus and the triangle involve negative values of the quantity r. If the negative sign is inadvertently omitted in the specification or computation of a color, the color point has the wrong position. To avoid such confusion, and to simplify color and luminosity computations, the RGB diagram is placed on a new set of coordinate axes, x, y and z, such that no negative values appear.

The XYZ Chromaticity Diagram

The transformation from the RGB form to the XYZ form of the chromaticity diagram is illustrated in Fig. 14. The triangle RGB is enclosed by a larger oblique triangle XYZ which fits the spectral locus as closely as possible. The size and position of XYZ are not chosen arbitrarily. The triangle is arranged to enclose all physically-realizable colors, and its shape is such as to simplify computations.

The diagram shown in Fig. 14 is transformed by three linear equations designed to produce, on the x-y coordinates, an oblique projection of RGB, such that the triangle XYZ becomes a right isosceles triangle, with point X at $x = 1$, $y = 0$, point Y at $y = 1$, $x = 0$, and point Z at $y = x = 0$. The transformed diagram is shown in Fig. 15. The transformation is so arranged that point W, representing equal-energy white light, appears at the center of gravity of the figure XYZ. We note that there are no negative values in the XYZ diagram, that no value of x or y exceeds unity. The transformation is arranged, moreover, so that $x + y + z = 1$.

The XYZ diagram is the internationally accepted representation of chromaticity values. The hue and saturation exhibited by any light source or colored object, illuminated by a particular light source, can be specified by the quantities x and y, which are known as the "trichromatic coefficients" of the specified color. These two coefficients, plus a statement of the brightness, give the complete specification of the color in physical terms.

The transformation from the RGB diagram to the XYZ diagram is a mathematical operation, without physical significance, designed to avoid negative values and to simplify certain calculations. Nevertheless, the XYZ diagram can be given a physical interpretation which serves to fix in mind certain of its properties. In this interpretation, the apex points X, Y and Z are thought of as representing the color coordinates of three *fictitious* primary colors, just as the points R, G, and B in Fig. 14 represent

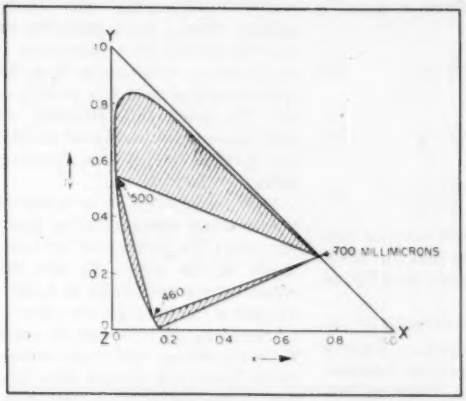

FIG. 16—If another set of primaries is chosen (spectral colors of 460, 500 and 700 millimicrons as shown), saturated blues can be matched but oranges, yellows and greens, in upper shaded area, cannot be matched

three actual primaries (the spectral colors of wavelengths 700, 546.1 and 435.8 millimicrons).

Following out this analogy, the X, Y and Z fictitious primaries are such that if they were physically realizable, and were used in a colorimeter to match the equal-energy white light and the unknown color, the amounts of these primaries needed to achieve the match in each case could be inserted in Eq. 1-3 and the quantities x, y and z computed directly from these equations.

On this basis, the equal-energy white point should fall, as it does, at the point $x = 0.333$, $y = 0.333$. The line YX represents the locus of all colors which can be matched by combining the X and Y fictitious primaries. None of these colors are real, since the spectral locus falls inside line YX.

We note that all the color-mixture properties of the RGB diagram are possessed by the XYZ diagram. The real colors are those enclosed by the spectral locus. Since this locus is not a closed figure, it is necessary to specify the limit of real colors in the open region. It might be expected that a straight line, joining the red and blue ends of the locus, would represent the limit of all the physically-producible colors in the purple region. Experiment verifies this.

The I.C.I. spectral primaries, located as shown on the spectral locus, form the triangle RGB. This triangle covers only about two thirds of the area enclosed by the spectral locus. Colors represented by points outside this triangle (in the shaded area, Fig. 15) cannot be matched by additive combinations of the standard spectral primaries. These include the saturated greens and blues previously mentioned.

If another set of primaries had been chosen, say spectral hues of wavelengths 700, 500 and 460 millimicrons (Fig. 16), many of the saturated blues could be very closely matched, but the triangle formed by these primaries would not enclose the important region of saturated oranges, yellows and reds. For purposes of color reproduction, it is more essential to reproduce saturated reds, oranges and yellows than saturated blues and greens, since the latter colors occur less often in nature. Accordingly the I.C.I. spectral primaries are a better choice. The filters and phosphors used in color television receivers are chosen to be as close approximations to these I.C.I. spectral primaries as is feasible.

Following further the analogy of X, Y and Z as fictitious primaries, we can specify these primaries by a set of color-mixture curves having the same significance as the mixture curves for the real primaries shown in Fig. 8, Part I. The corresponding curves for X, Y and Z are shown in Fig. 17. These curves completely describe the primaries, and correspond to the choice of the particular points X, Y and Z in Fig. 14. Since the shape of the triangle XYZ is subject only to the condition that it enclose the spectral locus rather closely, the corresponding color mixture curves (known as "distribution coefficients" and designated as $\bar{x}$, $\bar{y}$ and $\bar{z}$) can be chosen in a correspondingly arbitrary manner, to meet the purposes of the RGB-XYZ transformation.

We note that the curves in Fig. 17 are generally similar to those in Fig. 8, with the following exceptions: First, there are no negative values of $\bar{x}$, $\bar{y}$ or $\bar{z}$; on this account no negative values of x, y or z occur. Secondly, the area under each curve is chosen to be the same; thus equal amounts of the primaries X, Y and Z are required to match the equal-energy white, for which $x = y = z = 0.333$.

Finally, the shape and ordinate scale of the $\bar{y}$ curve are chosen to be identical to the relative luminosity curve, Fig. 13. Actually these two curves have quite different significance: $\bar{y}$ represents the amount of a green (fictitious) primary color required to match each spectral hue in combination with two other fictitious primaries, whereas the luminosity curve represents the relative luminous effect on the eye of each spectral hue. If these two curves are identical, however, a single computation serves to produce two results, namely the value of the tristimulus coefficient Y (see Eq. 8) of a particular colored light, and the luminosity L of that light.

Thus the three curves in Fig. 17, with the spectral radiation curve of a particular colored light source, serve to make available the complete description of the color in numerical terms, namely values of x and y which specify the hue and saturation, and the value L which specifies the luminosity (brightness) of the color.

To illustrate the manner in which these computations are carried out, consider the color described by Fig. 18A. This is a spectroradiometric curve of a particular color, obtained by measuring (with a bolometer or

other radiation-measuring device), the number of watts radiated by the source at each wavelength λ in the visible spectrum. This curve is plotted with its maximum ordinate as W watts. To obtain the trichromatic coefficients of this color we proceed as follows: First we divide the $w(\lambda)$ curve by W, thus producing a maximum ordinate of unity. Next we multiply the $w(\lambda)/W$ curve by the $\bar{x}$ curve. The area under the product curve, designated as the "tristimulus coefficient" X, represents the ratio l_a/l_w in Eq. 1-3, except that the color match between the color $w(\lambda)$ and the equal-energy white is now understood to be performed with the fictitious primaries X, Y and Z. Similarly, by taking the area under the product of the $w(\lambda)/W$ curve (maximum ordinate unity) with the $\bar{y}$ curve, we find the tristimulus coefficient Y (having the significance l_a/l_w), and a similar process involving the $\bar{z}$ curve gives the tristimulus coefficient Z (having the significance l_a/l_w).

Stated symbolically, the tristimulus coefficients are:

$$X = \frac{1}{W}\int_0^\infty w(\lambda)\,\bar{x}(\lambda)\,d\lambda \qquad (7)$$

$$Y = \frac{1}{W}\int_0^\infty w(\lambda)\,\bar{y}(\lambda)\,d\lambda \qquad (8)$$

$$Z = \frac{1}{W}\int_0^\infty w(\lambda)\,\bar{z}(\lambda)\,d\lambda \qquad (9)$$

By analogy with Eq. 1-3, the trichromatic coefficients x, y and z are then given by

$$x = \frac{X}{X+Y+Z} \qquad (10)$$

$$y = \frac{Y}{X+Y+Z} \qquad (11)$$

$$z = \frac{Z}{X+Y+Z} \qquad (12)$$

From these equations we note that $x + y + z = 1$, and that the maximum value of x, y and z is unity, as previously stated.

The luminosity of the color $w(\lambda)$ is given by Eq. 8, since the $\bar{y}$ curve is identical to the relative luminosity curve of the eye. Since the factor converting lumens to watts at the peak of the latter curve is 650 lumens per watt, the luminosity is expressed directly in lumens as

$$L = 650\,W\,Y \text{ lumens} \qquad (13)$$

The integrals in Eq. 7-9 are indicated as covering the whole wavelength range from zero to infinity. Actually, since the $\bar{x}$, $\bar{y}$ and $\bar{z}$ curves are zero outside the visible range from 380-780 millimicrons, the integration need not be carried outside these limits.

Specification by Dominant Wavelength

The values of x and y specifying the hue and saturation of a particular color, while of great value in technical specification, have the disadvantage that they offer no direct clue to the spectral hue which most nearly describes the color represented. Thus a color described by the wavelength 550 millimicrons is more clearly recognizable than the same color described as $x = 0.3$, $y = 0.7$. To avoid this difficulty, an alternative specification of a color can be taken directly from the chromaticity diagram.

This specification is in terms of the *dominant wavelength* (or dominant hue), the *purity*, and the *luminosity* of the color. To find the dominant hue and purity of a color, we pass a line through the point C representing the color and the point W representing the equal-energy white light and extend this line until it intersects the spectral locus, as shown in Fig. 19. The wavelength corresponding to the point of intersection is defined as the dominant wavelength of the color, and the corresponding spectral hue is the dominant hue.

The purity p is a measure of the saturation of the color, that is, of the distance from its point to the white point, and is given by

$$p = 1 - 0.333\left(\frac{1 - y_a/y_c}{0.333 - y_a}\right) \qquad (14)$$

where y_a is the y-coordinate of the color and y_i is the y-coordinate of the intersection with the spectral locus. The purity ranges from 0 to 1. For example, color point C in Fig. 19 has a dominant wavelength of 560 millimicrons and a purity of 0.69.

From Eq. 14, colors near the

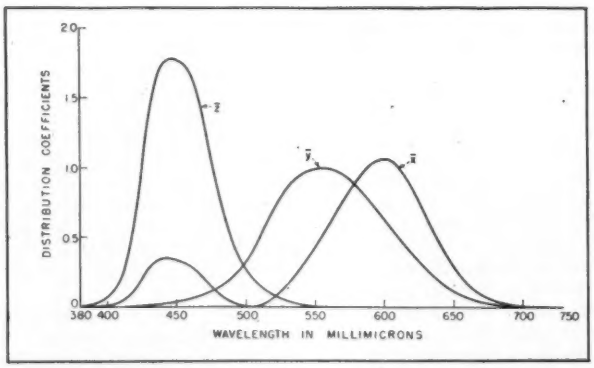

FIG. 17—Color mixture data ("distribution coefficients") for the fictitious primaries X, Y and Z. These have the same significance as the color mixture data for the real primaries R, G and B, shown in Fig. 8, Part I

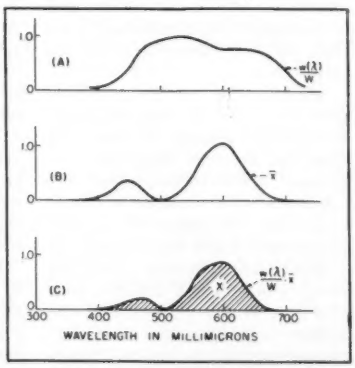

FIG. 18—Method of combining spectral radiation curve of light source with distribution coefficient to find tristimulus coefficient X

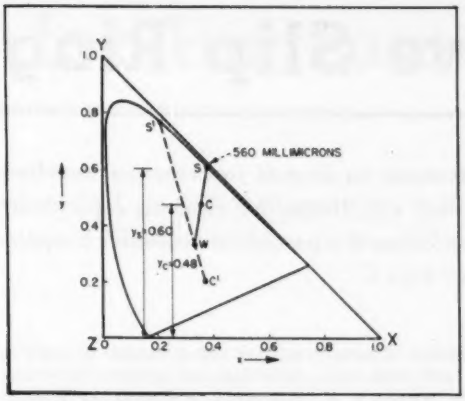

FIG. 19—Specification of color by dominant wavelength and purity. Line, passed through white point and color point to be specified, is extended to locus. Wavelength of intersection is dominant wavelength

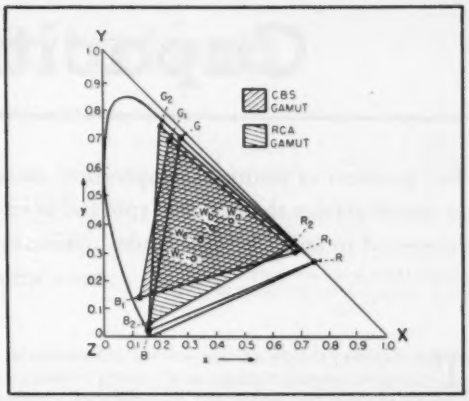

Fig. 21—Color gamuts of the CBS and RCA color television systems, as proposed to the FCC during the recent hearing, compared with the range covered by the standard spectral primaries

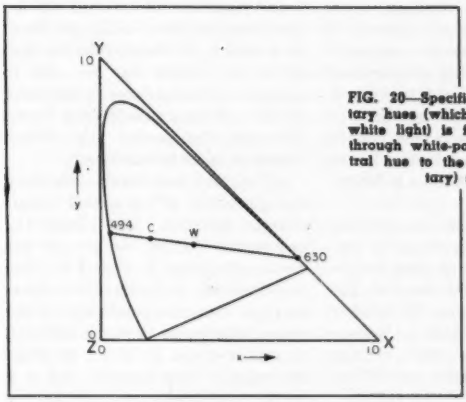

FIG. 20—Specification of complementary hues (which when mixed produce white light) is found by passing line through white-point W from one spectral hue to the opposite (complementary) spectral hue

spectral locus (y_s nearly equal y_s) have a purity near one, whereas colors near the white point (y_s near 0.333) have a purity near zero. The purity is, in other words, a direct measure of saturation.

This system of specification falls down when the color is one of the purples, that is, when its point falls below the white point in such a position that the extended line does not pass through the spectral locus, as point C′ in Fig. 19. In such cases the line is extended in the opposite direction, as shown, intersecting the spectal locus at a wavelength representative of the dominant hue *complementary* to that of the given color.

Complementary colors are not a very satisfactory specification, since the indication of subjective sensation is lost. The purity of such purple colors is computed by Eq. 14, taking y_s as the y-coordinate of the complementary dominant hue. To distinguish the color so indicated from color having the same actual dominant hue and purity, the purity of purples is stated as a negative number.

The foregoing illustrates the ease with which complementary colors (colors which when mixed produce white light) can be identified on the chromaticity diagram. To find a complementary color to a given color C (Fig. 20), we pass a line through C and W, extending it so as to intersect both sides of the spectral locus (or through the locus above and the saturated purple line below). The dominant hues so indicated are said to be complementary to one another.

With the properties of the x-y chromaticity diagram in mind, we are now in a position to locate certain colors on it and to show the boundary of the colors which can be covered by color-reproduction processes. In Fig 21, the I.C.I. spectral primaries are shown as RGB, and the equal-energy white as point W_e. Three other standardized whites are shown. Point W_a represents the color of average artificial (incandescent) illumination, known as illuminant A. Actually this is the color of an incandescent lamp operated at a color temperature of 2,848° Kelvin. Illuminants B and C (points W_b and W_c) are two forms of daylight, the first being representative of conditions met in the higher latitudes, the second of the middle and the lower latitudes. Also shown in Fig. 21 are the primary colors proposed for color television receivers. The points R_1, G_1, B_1 represent the receiver primaries standardized by FCC for the CBS field-sequential color system. Points R_2, G_2, B_2 mark the primary coordinates proposed to the FCC for the RCA dot-sequential system.

Capacitive Slip Ring

The problem of multiple temperature measurements on aircraft supercharger impellers at speeds greater than 20,000 rpm has been solved with thermistor elements capacitively connected to an r-f bridge. Under optimum conditions it is possible to determine temperatures within ±0.25 C

THE DETERMINATION of temperatures at selected stations on a high-speed rotor, like that of an aircraft engine supercharger, has been a very difficult problem.

One system that has been used with some success employs thermocouples as electrothermal converters and d-c slip rings as transfer devices to the recording equipment. At speeds greater than 20,000 rpm, however, the brush pressure must be so great to secure a continuous contact that brush life may be only a few minutes. The slip ring often must be refurbished after 15 minutes of operation. Possible thermoelectric action at the slip ring must also be properly understood.

Somewhat better results have been obtained when thermistors replaced the thermocouples. A thermistor is a thermally sensitive but otherwise stable resistor that can have the same physical size as a thermocouple. Instead of measuring voltage one now measures electrical resistance which is a known function of temperature.

Commercial thermistors in thermocouple size (about 6-mil spheres) can be purchased with resistance-temperature calibration possessing values ranging from about 2,000 ohms to 10^6 ohms at 70 F. Thermistors possess a negative temperature coefficient of ten times that of platinum at ordinary room temperatures, but this decreases as the temperature increases. They have upper temperature limits where their stability is no longer satisfactory.

Much longer brush and d-c slip ring life has been obtained by employing thermistors having resistance of about 15,000 ohms at the operating temperature. Resistance can be measured with a Wheatstone bridge or ohmmeter. If one can measure the resistance of the thermistor within ± 1 percent, then uncertainties of thermistor temperatures may be no greater than ± 0.25 C. Variable contact resistance or contact potential at the slip ring plays a relatively unimportant role when a high resistance level is maintained. Caution must be exercised, however, for too high a resistance level may result in spurious electric pickup when certain types of electronic measuring instruments are employed. To avoid difficulties inherent in mechanical contacts a capacitor type contact can be used.

Of the two types of noncontact coupling available, capacitor coupling seems much simpler than magnetic coupling. Simplicity becomes paramount when one must have a coupling device for each measuring station. A simple and dependable selector switch capable of positive switching into specified measuring stations by small actuating forces at high speeds would be difficult and expensive to make.

High-frequency measuring techniques make it possible to use a capacitor ring. The thermistor lends itself to a-c as well as d-c excitation as there is no significant skin effect. A General Radio type 516-C r-f bridge may be used to measure the impedance transferred to the stationary reference frame although the newer type 916-A bridge is more advantageous.

A test rig was built simulating the geometry of an actual supercharger impeller. The elementary equivalent electric circuit of this rig is displayed in Fig. 1A. The requirements to be met in the circuit are that the reactance of the stray capacitance in shunt with the thermal resistor be about 10 times the value of that resistor (for a 1 percent unidirectional error at this point), that the rotating capacitor be as high in capacitance as possible and still quite independent of rotation or axial translation, and that the variable impedance between moving ground and stationary ground be reduced to a low value.

Figure 1B illustrates a cylindrical slip ring capacitor whose capacitance is not very sensitive to end play or to eccentricity of rotor member. The axial length of the capacitor is 1.5 inches, with a 4-mil average air gap. The rotor diameter is 1 inch. It is believed that improvement would result if the stator were split into two 135-degree arcs, each adjusted in position by set screws under rotating conditions to secure a minimum gap.

There is an unavoidable parallel

* Formerly at the University of Connecticut.



FIG. 1—Thermistor and slip ring connections looking into bridge (A) and mechanical layout of the capacitive slip rings (B)

for Instrumentation

By F. P. FISCHER* and **C. H. COOGAN, Jr.**
Head, Dept. of Electrical Engineering, University of Buffalo, Buffalo, N. Y.
Head, Dept. of Mechanical Engineering, University of Connecticut, Storrs, Conn.



Arrangement of the r-f bridge equipment for thermistor measurements via slip rings

input capacitance at the points where the bridge is connected owing to the physical arrangement of parts. This inherent capacitance may have to be appropriately increased so as to reduce the equivalent resistance that the bridge can accept. In the present case the resistance must be no higher than 111 ohms. The newer type 916-A r-f bridge can accept 1,000 ohms at 1 mc. In the test rig, the input capacitance was maintained at 500 $\mu\mu$f. This value must be known and enters into the formula found in the instruction manual supplied by the manufacturer of the bridge. It is clear that the bridge does not directly read the thermistor resistance but the latter may be derived from the bridge dial settings by computation or, better still, by prearranged charts or nomographs including the thermistor calibration.

The shunt stray capacitance is minimized by sufficiently separating a No. 36 Formex wire from the ground plane by laying down some Bakelite insulating cement and then finally cementing the wire. The wire is staked to the capacitor ring at one end and fastened to the thermistor at the other. The free thermistor terminal is grounded. It is desirable to use a low value of thermistor resistance at the working temperature, for example, below 2,000 ohms so the shunt stray capacitive reactance has little effect.

The frequency is a compromise in an attempt to keep the shunt stray reactance high and the rotating-capacitor series reactance low. If there is sufficient instrument sensitivity, lower values of frequency can be used. The oscillator, preferably a crystal type, delivers one stabilized frequency at 100 mv.

If several rings are to be used, the return path is always through a common ground. If ball bearings are used to support the dummy impeller, a parasitic variable impedance is set up between moving and stationary grounds that inhibits a bridge balance. A satisfactory bypass is effected by placing a large stationary grounded shield close to the moving impeller. In an actual supercharger assembly, such a shield is inherent in the construction.

The 516-C radio-frequency bridge is operated at 500 kc with an associated oscillator. The detector is a suitable radio receiver used to secure an audible minimum in conjunction with a modulated oscillator. A 500-kc unmodulated oscillator is equally satisfactory since the rotating capacitor modulates the carrier so the audio note is an additional indication of frequency. Since a meter indication is superior in noisy areas to an audible note, a wave analyzer that filters stray frequencies may be added to the radio receiver to give a sensitive visual null. In an actual installation such formal equipment as a wave analyzer or commercial crystal oscillator could be replaced by simpler and less expensive electronic equipment.

When the test rig was run up to speeds of 20,000 rpm by an air turbine bridge sensitivities of one part in a thousand were observed over the whole speed range. This is the significant part of the test. Good correlation was observed between thermistor measurements and readings of a stationary standard thermometer arranged close to an axially located rotating thermistor.

A direct measurement of resistance in this case is inherently limited by the calibration error of the bridge and also by the residual parameters. Although the sensitivity of the instrument is about one part in a thousand, a precision greater than $\pm$ 3 percent in resistance probably cannot be expected even when balancing out the residual parameters, including residual resistance in the r-f paths.

If the bridge and circuit as a unit is first calibrated over the range (maintaining constant oscillator frequency) by substituting small calibrated resistors for the thermistors, or by making a controlled heat run under stationary conditions with thermistors as well as other temperature sensing elements of known characteristics in place, a $\pm$1-percent measurement of resistance and a thermistor temperature within $\pm$ 0.25 C should be attainable. Such measurements are best made on an actual impeller assembly free from its enclosing case.

This work was a portion of a general project on instrumentation completed in December 1946 by the authors in collaboration with G. S. Timoshenko and L. E. Williams of the University of Connecticut. The project was sponsored by the Pratt and Whitney Division of the United Aircraft Corporation. R. E. Gorton and E. M. Moffatt of the Corporation served respectively as project coordinator and technical advisor.

Bibliography

J. A. Becker, C. B. Green and G. L. Pearson, Properties and Uses of Thermistors — Thermally Sensitive Resistors, *Trans. AIEE*, 65, p 711, Nov. 1946.

El Gnam, New Device Measures the Temperature of Machine Components Revolving at High Speed, *The Engineering Digest* (American Edition) 2, No. 1, p 12, Jan. 1945.

PERMANENT-MAGNET

By J. H. REISNER and S. M. ZOLLERS

Radio Corporation of America
Camden, N. J.

WITH THE ELECTRON MICROSCOPE finding new uses in every field of science and in every industry, the need for a simpler and more reliable microscope has been growing rapidly. In order to fill this need, the permanent-magnet type was designed.

The instrument, Fig. 1, requires little technical skill to operate. As a natural consequence of the simplification of design and function, external appearance is both simple and functional.

At a third of the expense and complexity of larger electron microscopes, the permanent-magnet electron microscope solves ninety percent of the problems applicable to electron microscopy.

Electrical System

The source of illumination in the microscope, Fig. 2, is a beam of high-energy electrons. The electrons are released, accelerated and aimed in the gun which is situated at the top of the microscope column. A fifty-kilovolt potential applied between the filament and the anode of the gun gives the electrons enough kinetic energy to pass through the specimens used in electron microscopy.

Fifty kilovolts potential is used because at lower voltages a considerable number of the electrons are stopped by the specimen, which consequently heats up, frequently to its own destruction. Excellent voltage stability is a necessary requirement of the high voltage because the focal length of a magnetic lens such as the one used in the microscope depends upon the energy of the electrons as well as upon the magnitude of the magnetic field. Image defect produced by fluctuating voltage is analogous to chromatic aberration in light optics. In order to achieve a resolution of 100 A with the permanent-magnet electron microscope it is necessary to stabilize the accelerating voltage to one part in ten thousand.

The gun on the microscope is energized by an external and remotely located high-voltage supply which is connected by means of a length of x-ray cable.

The high-voltage unit, Fig. 3, divides into two sections, a control unit, and a rectifier unit. The control unit is small enough to sit on a table beside the microscope column and provides electrical control at the point most convenient to the operator. The rectifier unit, Fig. 4, houses the high-voltage tripler and the filament oscillator and transformer. It may be placed on

FIG. 1—Permanent-magnet electron microscope in use in a laboratory, control unit in the background on the table and power supply on the floor

ELECTRON MICROSCOPE

Use of Alnico 5 instead of conventional electromagnets to energize the lenses, and other design innovations, provide a handy, economical and comparatively trouble-free instrument suitable for 90 percent of all applications. Specimens are readily manipulated and photographic plates made without extensive pumping-down

the floor or under a table.

Referring to Fig. 3, oscillators V_1 and V_2 produce an 80-kc r-f signal. This signal is applied across the series-resonant high-Q L-C circuit L_1C_1 producing a 17-kilovolt signal across L_1. On one part of the cycle C_3 is charged through rectifier V_3 then, during the next half cycle, the voltages across C_2 and L_1 are additive and charge capacitors C_3 and C_4 through rectifier V_4. The signal across L_1 also causes C_5 to charge through rectifier V_5. The voltage across C_3, C_5 and C_4 in series is thus triple that across L_1. The ripple in the output is filtered through a resonant filter to ground.

Stabilization of output voltages against line and load fluctuations is accomplished by d-c amplifier, V_6 and V_7, operating series regulators V_8 and V_9. Resistors R_1 and R_2 provide a bridge element between the d-c and high-voltage output and a reference voltage established by glow tubes. Tube V_6 calls for full power to the oscillators through the regulators until the negative high voltage produces a negative bias at the junction of R_1 and R_2, whereupon the d-c amplifier regulates the output voltage by reducing oscillator plate voltage.

Focus of the microscope is accomplished by changing the accelerating voltage, which changes the focal length of the lenses. Potentiometers R_3 (coarse) and R_4 (fine) vary the reference voltage, which causes the voltage-regulating system to readjust itself to a corresponding output voltage. The output is continuously variable from 45 to 50 kilovolts.

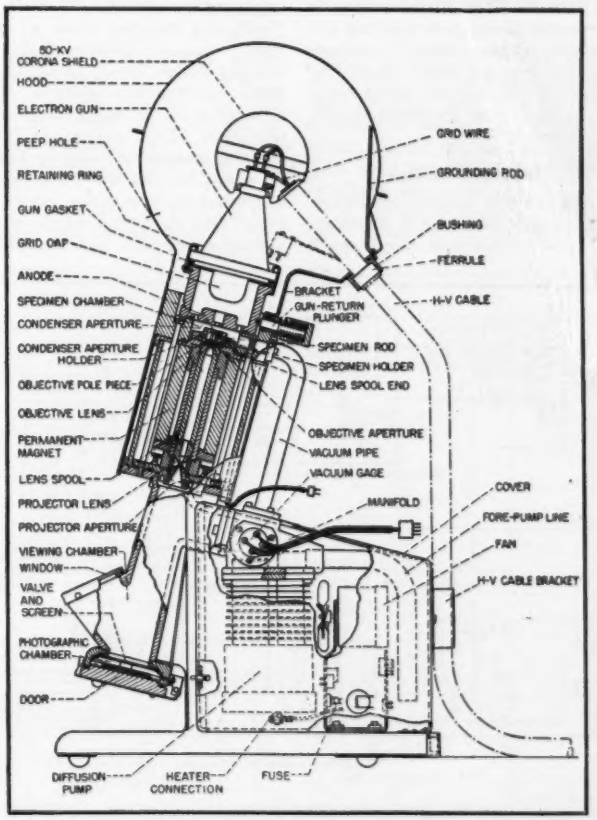

FIG. 2—Cross-sectional drawing of the microscope column, showing the location of component parts

Gun Filament Transformer

In order to solve the problem of termination of the high-voltage cable at the rectifier in the minimum amount of space, the high-voltage bushing which connects the x-ray cable to the high-voltage output is also the filament transformer, as shown in Fig. 4. The voltage gradient from the high point of the rectifier unit to its wall is in the direction which the conductors in an output cable must occupy, while the gradient in the cable proper is radial to those wires and therefore perpendicular to the gradient toward the wall. To make the transition in fields without reaching a

gradient above the corona point an annular corona ring is mounted axially with the outgoing cable and therefore parallel to the field from the wall.

Physical transition to the cable is made through a hard-rubber insulator with the surface cut in the usual manner to increase the leakage path. The inside diameter of the hard-rubber piece is large enough to take the rubber insulation of the x-ray cable. The cable extends into the bushing a distance of six inches to prevent breakdown along the interface of the two insulators.

Inside the bushing extra space is provided for a secondary coil, the means of energizing the filament. The outside surface of the bushing, from the point where it contacts the corona ring to its termination at the metal cable shield, is at ground potential by virtue of an Aquadag surface. This equipotential surface on the rubber prevents corona starting between the rubber and an otherwise necessary ground electrode. It has the additional function of shielding the high-impedance output from the r-f fields inside the cabinet. The primary of the filament transformer, actually the inductive element of a Colpitts oscillator, is wound on the outside of a laminated Bakelite core, which also serves as a support and alignment bushing for the hard-rubber cable connector. The cable assembly actually includes the hard-rubber connector. Connection to the high-voltage supply is effected by sliding the rubber connector into a hole on the top of the rectifier cabinet.

The filament transformer is energized by a 200-kc oscillator. The relatively high frequency is utilized to improve coupling in the transformer, which contains no iron.

A system of fail-safe circuit-completing interlocks prevents turn-on of high-voltage power unless all components are correctly in place and shielded. When protective hoods are removed grounding rods short out the high voltage before access to the voltage compartments is possible. The power supply is protected during such shorting episodes by its high internal resistance and by overload relays which cut off plate power. All cables carry a ground lead for protection against short-circuit shock.

Vacuum System

The kinetic vacuum system is made up of two pumps in series, an oil-vapor or diffusion pump and a mechanical fore or rough pump.

In earlier instruments the vacuum pumps were cut off from the microscope column during specimen and plate changes. This necessitates complex valving and pumping systems to protect the diffusion-pump oil from decomposition by the oxygen in the air. Some instruments employed systems of air locks and auxiliary pumps. The permanent-magnet microscope has eliminated much of this valving and pumping complexity by first reducing to a minimum the air admitted with a specimen and plate, and second by utilizing recently developed chemically stable silicone diffusion-pump oil that does not readily decompose.

The total evacuated volume of the instrument is one liter. An oil diffusion pump mounted as shown in Fig. 2, can pump the system to operating vacuum (5×10^{-4} mm) in twenty-five minutes from a cold start. The oil diffusion pump, a thermal device, is air cooled by a small magnetically shielded fan situated with the pump under the rear cover of the instrument. The pumping system will recover from the admission of 0.06 cc of air with a specimen in six seconds, and from the admission of 80 cc of air with a photographic plate in a little over

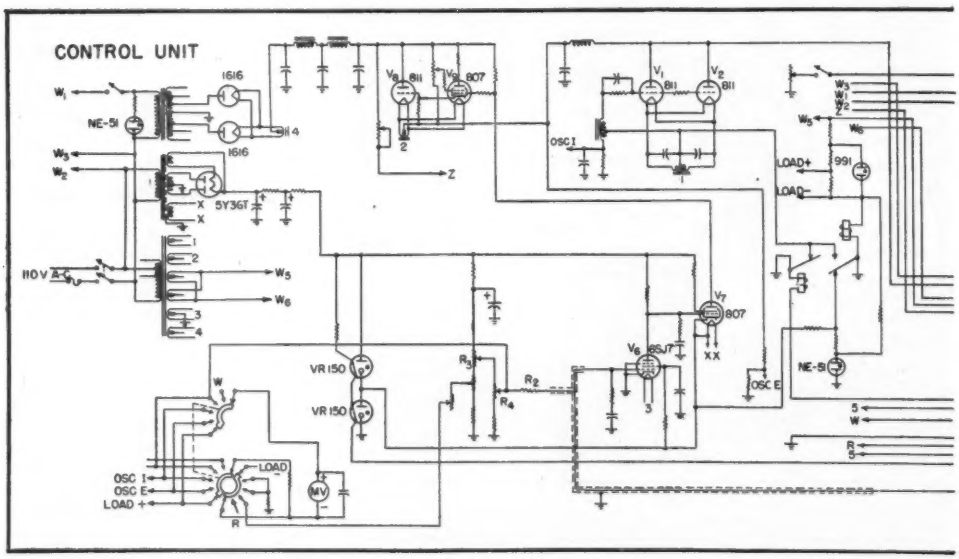

FIG. 3—Simplified schematic circuit diagram of the three-unit permanent-magnet electron microscope. Plugs

a minute. A thermocouple-type of vacuum indicator, attached to the microscope column, reads on the test meter of the high-voltage control unit.

Optical System

The exterior appearance of the microscope column makes the position of the optical elements nearly self-evident. In reverse order to that in the ordinary light microscope, the source of illumination is at the top and the image is formed at the foot of the microscope.

The electron gun is situated under the spherical hood. The hood has been removed in Fig. 5 to show the gun and a grounding rod which shorts out the high-voltage power when the hood is removed. The high-voltage cable is held in place by a bracket at the rear of the gun so that movement of the cable can exert no strain on the gun. The heavy rubber-covered cable enters the spherical corona shell on the gun through a large hole. Inside the corona shell, connection is made to the gun terminals by thin flexible leads which permit the gun to be moved transversely on the instrument without binding in the cable.

Two knobs directly below the gun position the gun transversely with respect to the axis of the optical system. By this means some element of the solid cone of illumination out of the gun which is parallel to the optical axis of the instrument may be found and centered over that optical axis.

The gun comprises both the cast-glass insulator and the cylindrically shaped metal element which supports the glass. This metal element is the anode, and is at ground potential. The adjustment screws press against the anode shell to cause the gun to move. The vacuum seal between the glass insulator and the anode is made by means of a neoprene gasket lubricated with stopcock grease. The transverse adjustment of the gun may be made while the beam is turned on since the neoprene gasket between the anode and the upper wall of the object provides a good sliding vacuum seal.

The electron beam leaving the gun is so wide and intense that it would destroy a delicate specimen unless restricted by a beam-limiting aperture, frequently called a condenser aperture by analogy to the light microscope. The hole in the thin platinum aperture disc has a diameter of 0.003 inch. Directly below this aperture is the specimen.

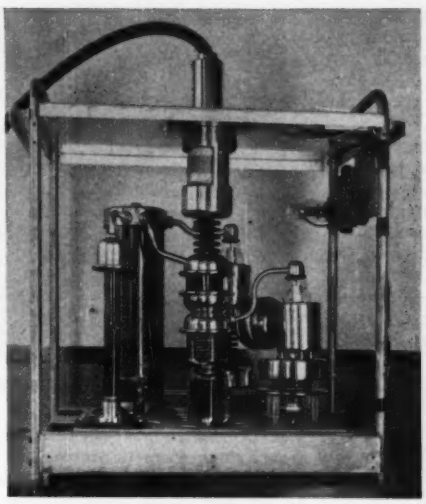



FIG. 4—High-voltage rectifier unit, with case removed, and cross-sectional drawing of the combined output connector and electron-gun filament transformer

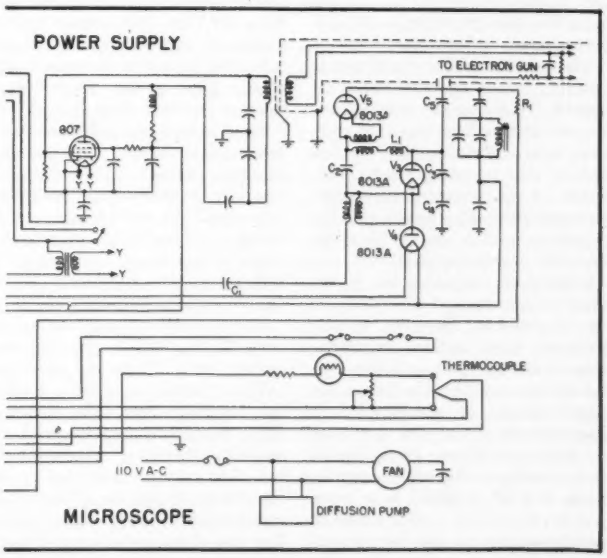

are omitted from the diagram; several are used where this illustration splits

Permanent-Magnet Lens

A magnetic lens focuses the electrons passing through the specimen and forms a real magnified image in front of a second magnetic lens which forms a further enlarged image on the viewing screen or photographic plate. The magnetic lens is actually a magnetic field

which is formed by a gap in a magnetic circuit. The field fringing out from such a gap, formed by iron pole pieces, interacts with the electron beam much as a glass light lens does.

The literature on the gaps or pole pieces used in magnetic lenses is extensive so the subject need not be discussed here. Of more interest because of its novelty and importance is the energization of the magnetic lenses by the permanent magnets from which the new electron microscope derives its name.

Permanent magnets are desirable because they eliminate coil windings, cables, power supplies, filters and multitube regulating circuits required with electromagnetic energization of lenses. The resultant advantages are lower cost and comparatively trouble-free service.

It is not generally possible to replace an electromagnetic element directly with a permanent magnet because the circuit is actually altered. In the case of the lens, simple replacement of windings by magnets to energize the lens gap produces stray fields which utterly destroy the microscope image. To use permanent magnets successfully, it is necessary to utilize the otherwise stray external flux to energize an additional gap. By positioning the second gap coaxially with the first gap, two lenses may be energized from a single magnetic source. Most important, the two lens gaps, and all the intervening space, are covered by a surface of sensibly constant magnetic potential, so that destructive stray fields are eliminated. Since two lenses are necessary for high magnification the double-gap magnetic circuit proves to be doubly beneficial.

FIG. 5—Microscope column with protective hood removed

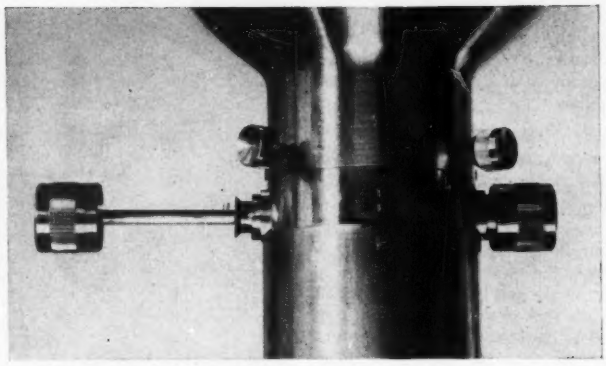

FIG. 6—Specimen-manipulation rod shown withdrawn

Alnico 5 is used as the magnet material in a high-demagnetization-coefficient circuit to give strong energization and great stability against demagnetization by removal of pole pieces. The upper or objective gap is energized to 1,300 gilberts and the projector to 900 gilberts.

The use of permanent magnets to energize lenses has the disadvantage of discarding the unique property of variable focal length of magnetic lenses. This property is frequently used to change the magnification of an electron microscope over wide ranges by merely turning a selector switch, or to focus an image by turning a knob.

Change of magnification is actually unimportant for any single type of problem. However, specific problems have certain magnifications which are most suitable. Tissue sections are best studied at low magnifications of about 1,500 x where fine structure may be related to gross structure most easily. Virus studies need high magnification of 6,000 x merely to be seen. In order to provide a wide range of magnifications in the permanent-magnet electron microscope, the pole pieces are changed to provide any one of three fixed direct magnifications of 1,500, 3,000 and 6,000 times. Photographic plates exposed at these magnifications may frequently be enlarged to show new detail at magnifications of 40,000 times.

Focus is obtained by varying the accelerating high voltage.

Specimen Holder

The specimens used in electron microscopy are small. An object 0.0003 inch in extent will completely fill the field of view of the microscope at 6,000 x. Specimens are likewise very thin, less than 0.3×10^{-3} mm, and need to be supported on wire screens. Small particles are deposited on equally thin plastic films, in turn supported by the wire screens. For ease of handling, standard ⅛-inch diameter 200-mesh metal screens are used for specimen support. To insert a specimen into the microscope, the screen is clamped in a small holder and inserted in a hole drilled transversely into a 5/16-inch rod which slides in and out of the microscope across the optical axis of the system.

Figure 6 shows a specimen holder partially inserted in the specimen control rod. When the specimen holder is in place, the rod is pushed into the microscope. The specimen slides through a neoprene vacuum-sealing gasket which surrounds the rod. The only air admitted to the interior in the process is that in the open volume of the specimen holder. The rod slides until its end abuts the plunger driven by the large

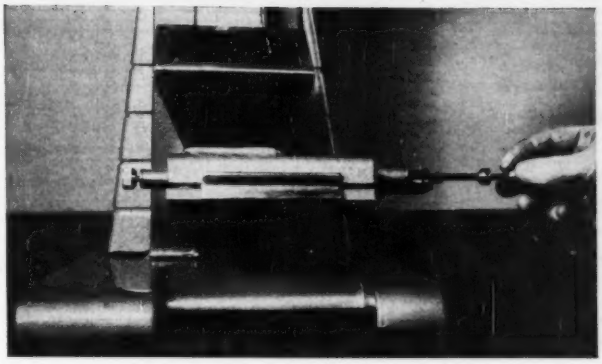

FIG. 7—Exposure of a photographic plate

right-hand knob on the upper part of the column. When this occurs, the specimen screen is over the axis of the microscope and the enlarged image of the specimen will be seen on the final screen.

Turning the right-hand knob drives the plunger in or out and the specimen follows with the rod which abuts the plunger. The specimen may be moved at right angles to this motion by rotating the rod by turning the large left-hand knob at the end of the rod. Since the specimen holder locates the specimen as far off the axis of the rod as possible, a rotation of the rod displaces all points on the specimen toward or away from the optical axis and also changes their distance from the objective lens. If the rotation is limited to three degrees from center, it is possible to scan three meshes in a direction perpendicular to the length of the rod and yet not move the specimen points out of range of focus of the lens.

This principle of using a single axis to produce both longitudinal and transverse movements as well as furnish a path for the introduction of specimens ranks along with the permanent-magnet lenses as a simplifying and economizing feature. Operationally, it has been found that the rod specimen stage has excellent stability in the face of heating from the gun, or from room vibration. The large control knobs permit ease of control and house additional mechanism. The left-hand knob contains a three-to-one friction planetary drive to increase the fineness of the transverse specimen adjustment.

Final Image

The image is viewed through a front window wide enough for two people to make observations simultaneously. The phosphorescent material used to convert the electron image to a visible image is deposited on a surface perpendicular to the optical axis. Viewing the phosphor directly permits maximum brilliance in the image for a given beam intensity but requires oblique viewing. The fifteen-degree tilt in the microscope was applied to make comfortable viewing possible.

The photographic function of the electron microscope is essential to provide a permanent record, to provide an image which can be studied at length and measured accurately and to make use of the high resolution inherent in the electron image. It is practice to expose the photographic plate directly to the electron image which, like light, causes darkening in the developed negative. Direct exposure has the advantage of great photosensitivity, which permits photography of low-intensity images. Also, because of the fine-grain properties of the photographic plate, the detail in the image is all preserved on the plate. Photographic enlargements to ten times are frequently carried out. The drawback to direct exposure of the plate in earlier electron microscopes is the difficulty of inserting the plate.

In the permanent-magnet microscope, the functions of vacuum valving, fluorescent screen and photographic shutter are carried out by a simple mechanical system comprising a sliding plate and a push rod. A circular groove in the bottom of the viewing chamber holds a neoprene gasket against which the valve plate presses to seal off the chamber during the periods when the door of the photo chamber is open for the insertion or removal of the plate cassette. Following insertion of the cassette and closing of the photochamber door, a knob at the right of the photochamber is pulled ¾-inch to a stop. This motion slides the valve plate off the gasket, breaking the vacuum seal, and permits the plate chamber to be pumped out. The upper surface of the sliding plate is dished to hold a fluorescent screen, while a pin from the lower surface of the plate engages a catch on the cassette. When the valve-shutter rod is pulled to its extreme right-hand position, Figure 7, the valve plate is pulled from in front of the photographic plate. At the same time the light-tight cover of the cassette slides aside and the plate is exposed. Sliding the rod all the way back closes the valve and cassette. A relief valve on the left of the photochamber is used to admit air to the photochamber, permitting the door to be opened.

The simplification of operation of the electron microscope has been brought to a point where people can operate it usefully and confidently after less than an hour's instruction. The expense has been reduced to a point where small economic units can afford to use it. The performance of the instrument is such as to make it applicable in ninety percent of all electron microscopic problems.

Bibliography

W. W. MacDonald, Electron Microscopy in the United States, ELECTRONICS, p 66, August 1950.

Zworykin, Morton, Ramberg, Hillier and Vance, "Electron Optics and the Electron Microscope," John Wiley & Sons, New York, 1945.

B. v. Borries, "Die Ubermikroskopie", Saenger, Berlin, 1949.

R. W. G. Wyckoff, "Microscopy Technique and Applications", *Interscience Pub.* 1949.

V. K. Zworykin and J. Hillier, Compact High-Resolving-Power Electron Microscope, *Jour. App. Phys.*, 14, p 658, 1943.

P. C. Smith and R. G. Picard, Electron Microscopes, *Radio News*, 32, p 14, 1944.

A. W. Vance, Stable Power Supplies for Electron Microscopes, *RCA Rev.*, 5, p 293, 1941.

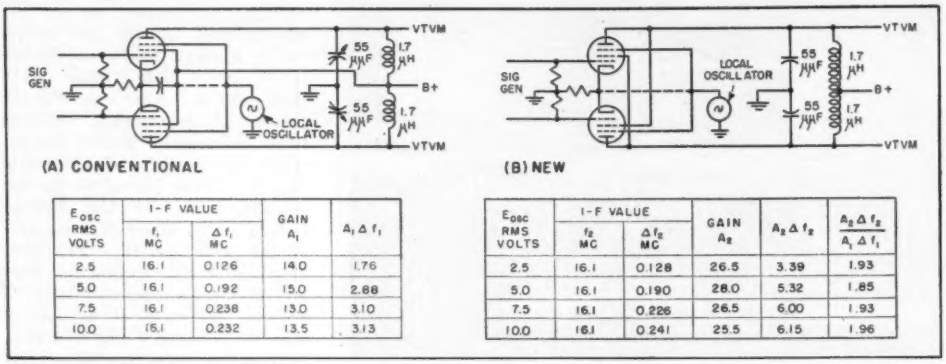

E_{osc} RMS VOLTS	I-F VALUE f_1 MC	I-F VALUE Δf_1 MC	GAIN A_1	$A_1 \Delta f_1$
2.5	16.1	0.126	14.0	1.76
5.0	16.1	0.192	15.0	2.88
7.5	16.1	0.238	13.0	3.10
10.0	16.1	0.232	13.5	3.13

E_{osc} RMS VOLTS	I-F VALUE f_2 MC	I-F VALUE Δf_2 MC	GAIN A_2	$A_2 \Delta f_2$	$\frac{A_2 \Delta f_2}{A_1 \Delta f_1}$
2.5	16.1	0.128	26.5	3.39	1.93
5.0	16.1	0.190	28.0	5.32	1.85
7.5	16.1	0.226	26.5	6.00	1.93
10.0	16.1	0.241	25.5	6.15	1.96

FIG. 1—Comparison of conventional balanced push-pull pentode mixer with improved method that places tuned circuit between screen and plate of each tube. Values of components are not necessarily the most desirable for the frequency and bandwidth used

GAIN-DOUBLING

Theory and experimental results for a method of obtaining twice the normal conversion transconductance from pentode mixers. Signal is applied to an inner grid, and No. 3 grid is used in an outer space-current local oscillator. Practical converter circuits for narrow-band broadcast receivers and wide-band f-m receivers are given

IN THE USUAL frequency mixer tube the conversion transconductance is approximately g_m/π, where g_m is the maximum signal grid-to-plate transconductance during the excursion of an oscillator cycle. The possibility of obtaining a conversion transconductance equal to $2g_m/\pi$ was first pointed out by E. W. Herold[1]. In effect, his method involves changing the phase of the signal current 180 deg at the local oscillator frequency rate, using a beam-deflection tube or one having multihumped characteristics. The method to be described here achieves the same gain-doubling result more simply with a pentode mixer.

Analysis

The conversion transconductance g_c of a mixer tube, when considering a small signal modulating a relatively large local oscillator signal of radian frequency ω, is

$$g_c = \frac{1}{2\pi}\int_{-\pi}^{+\pi} g_m \cos \omega t \, d(\omega t) \qquad (1)$$

Solution of this equation does not give maximum conversion transconductance because the negative portion of the cycle subtracts from the positive portion. However, if the integral is observed from $\pi/2$ to $-\pi/2$ only, we obtain g_m/π as the maximum positive limit for conversion transconductance with conventional mixing. These limits are achieved in a triode mixer by imposing sufficient oscillator voltage on the No. 1 grid to cut off the tube during the negative portion of the oscillator cycle. In conventional pentode mixing with the oscillator signal on an outer grid, the same limits are obtained by diverting the space current to an inner grid of the tube during the negative portion of the local oscillator cycle. The goal, however, is to double this transconductance value.

With conventional triode and pentode mixing, the i-f signal is obtained from a tube element that is cut off for half of the tube-operating period. If by some means the sign of the integral of Eq. 1 could be changed for this cut-off half of the oscillator cycle, then the conversion transconductance would be doubled.

Consider a pentode mixer in which the incoming carrier signal is applied to the No. 1 grid and the local oscillator to the suppressor (No. 3) grid. Since a pentode maintains essentially constant current in the screen-plate region, each increase in plate current due to oscillator modulation of the suppressor must be offset by an equal decrease in screen current. As a

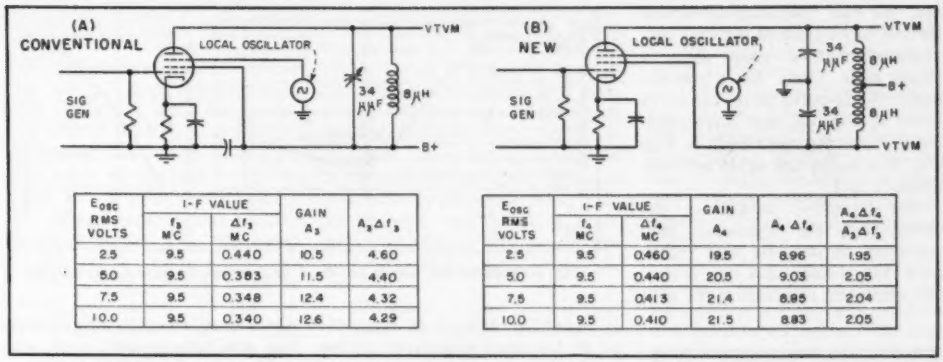

E_{osc} RMS VOLTS	I-F VALUE f_3 MC	I-F VALUE Δf_3 MC	GAIN A_3	$A_3\Delta f_3$
2.5	9.5	0.440	10.5	4.60
5.0	9.5	0.383	11.5	4.40
7.5	9.5	0.348	12.4	4.32
10.0	9.5	0.340	12.6	4.29

E_{osc} RMS VOLTS	I-F VALUE f_4 MC	I-F VALUE Δf_4 MC	GAIN A_4	$A_4\Delta f_4$	$\frac{A_4\Delta f_4}{A_3\Delta f_3}$
2.5	9.5	0.460	19.5	8.96	1.95
5.0	9.5	0.440	20.5	9.03	2.05
7.5	9.5	0.413	21.4	8.85	2.04
10.0	9.5	0.410	21.5	8.83	2.05

FIG. 2—Comparison of conventional single-tube pentode mixer circuit with improved method that eliminates screen bypass capacitor so tuned circuit is between screen and plate. Values of corresponding inductances and capacitances should be equal as indicated

Frequency Converters

By VERNON H. ASKE
Application Laboratory
Sylvania Electric Products Inc.
Kew Gardens, N. Y.

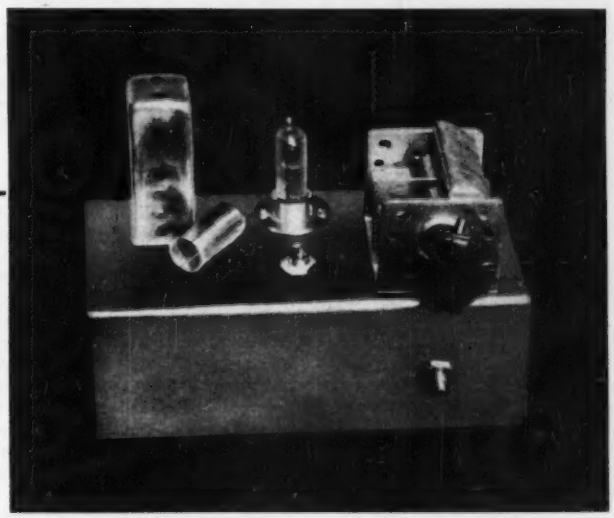

Subminiature pentode converter for broadcast band use, employing improved circuit of FIG. 5 to achieve more than twice the gain of a conventional 6BE6 circuit

result, the i-f components of plate and screen currents are 180 deg out of phase and can be added in a conventional push-pull manner to get twice the gain from the tube. Actually, the mere placing of a tuned circuit between the plate and screen changes the sign of the integral in Eq. 1 for half of each cycle to give the desired doubling of conversion transconductance.

Verification

Experimental verification of gain doubling with this frequency-mixing process is given in Fig. 1 and 2. Performance of a conventional balanced type mixer is presented in Fig. 1A and results for the new circuit, using the same tubes under the same d-c operating conditions, are in Fig. 1B. The tubes were developmental types with many-turns-per-inch suppressor grids. The oscillator voltage is used as a variable.

Since the voltage gain is inversely proportional to Δf and the two vary with oscillator voltage, the product of these two terms serves as a convenient means of comparison between the two systems. The last column of the tabulation in Fig. 1B indicates the ratio of $A_3\Delta f_3$ for the new system to $A_1\Delta f_1$ for the conventional system. These values center about a ratio of 2 to 1, which is predicted from the theory.

As a further check and compari-

son, the new frequency-conversion method was compared with the conventional method when using a single tube. Data for a conventional single-ended mixer circuit is given in Fig. 2A, and corresponding data for the new circuit in Fig. 2B. The ratios are again approximately 2 to 1.

The foregoing data were obtained with the suppressor grid operating at zero d-c bias rather than the grid-leak bias that is usually employed. Operating the grid

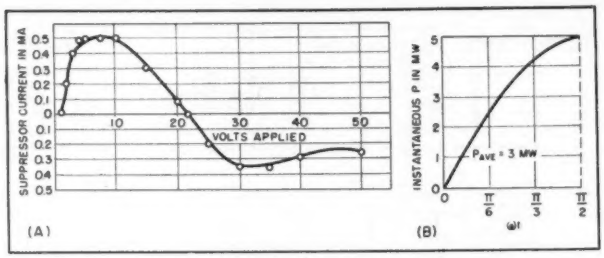

FIG. 4—Characteristic curves for No. 3 grid of typical experimental pentode

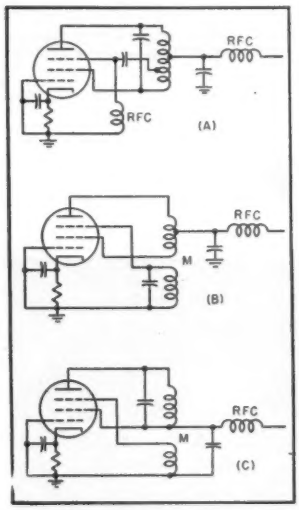

FIG. 3—Balanced and unbalanced oscillator circuits employing new gain-doubling technique

at zero bias results in a much greater peak g_m and thereby increases conversion transconductance. If sufficient oscillator voltage is impressed, the plate current is swung into saturation and g_c approaches the ideal value of approximately 32 percent of the peak g_m.

Isolation

Another interesting aspect of the circuit is the isolation it offers to signals that tend to pass through the mixer tube at the intermediate frequency. Isolation exists, since any signal on the No. 1 grid produces modulation of the same phase on the screen and plate currents, and will cancel out in the push-pull i-f transformer. This action makes it somewhat difficult to align the i-f by the usual manner of placing the i-f signal on the signal grid of the mixer tube. In this case the signal can better be placed on the oscillator grid. The degree of isolation is determined by the degree of balance in the primary of the i-f transformer and by the transconductance from signal grid-to-plate relative to the transconductance of signal grid-to-screen.

In a pentode we are mainly concerned with shot-effect noise and partition noise. The former is due to time-varying emission from the cathode, and the latter is due to random distribution of cathode current to the positive electrodes in the tube.

Noise Suppression

Assume an ideal pentode in which partition noise does not exist. Assume also that there is a push-pull connection between plate and screen, and that the screen and plate currents are precisely equal. The noise in the plate and screen would then be of equal magnitude and identical phase, disregarding transit-time effects. With a perfect output transformer, there would be no noise output from the tube, because of cancellation within this transformer.

Now, imagine another ideal pentode in which no shot-effect noise exists, but in which partition noise does exist. In this tube any noise variation that takes place in the plate circuit must be accompanied by an equal and opposite noise variation in the screen circuit, since space current is perfectly constant. Thus, if this push-pull connection has in some way doubled the effective transconductance, the equivalent noise resistance of the tube has not changed since the effective noise has also been doubled.

The pentode mixer circuit presented here is actually the combination of these two ideal cases. It therefore has somewhat smaller equivalent noise resistance in the circuit than does a conventional mixer, since the shot-effect noise has decreased while the affect of partition noise remains unchanged.

Converter Tube

In conjunction with this work on the mixer circuit, a program was also carried out to combine this circuit into a converter tube that performs the functions of mixer and local oscillator. In this converter, the outer space current oscillations that exist between the outer elements of a multigrid tube are utilized. The resulting converter circuit gives four times the voltage gain with 30 percent less cathode current relative to the 6BE6 converter. The equivalent noise resistance of this converter was below 18,000 ohms, which is less than one-tenth that of the 6BE6.

The tube characteristics most desirable for the oscillator are those of a pentode whose No. 3 grid-to-plate transconductance is relatively high. This No. 3 grid is used as the control grid, and the plate or screen as the oscillator anode.

The oscillator may be either the balanced or unbalanced type. In the balanced oscillator, shown in Fig. 3A and 3B, the plate-screen coil is center-tapped to r-f ground. This oscillator is suited to a balanced-type circuit since the current variations, as caused by No. 3 grid modulation, are 180 deg out of phase in the plate and screen. The plate voltage holds the same phase relationship to the controlling grid

voltage as it does in a conventional oscillator.

For unbalanced operation, either plate or screen may be grounded to r-f as in Fig. 3C. Since the screen-plate current is nearly constant, the oscillations are confined to the outer space of the tube.

The No. 3 grid characteristics for a typical experimental pentode are shown in Fig. 4A. The negative resistance characteristic encountered above 10 volts tends to enhance oscillations. To find the required grid-driving power, a sine wave can be impressed on the suppressor grid and a time plot of current obtained from the grid characteristics. The product of instantaneous voltage and grid current is shown in Fig. 4B. A peak swing of 10 volts is used because this value produces plate current cutoff and is in accordance with characteristics that follow. The average power may be obtained by integrating the instantaneous power curve. The resulting average power is three milliwatts, which is very low and normally will be less than the associated circuit losses.

Converter Design

It is possible to calculate the tickler coil impedance required for a particular application. Suppose an oscillator is to be built at 20 mc in which a tickler coil is placed in the plate circuit to excite a tuned circuit connected to the No. 3 grid, and a total driving power of 15 milliwatts is required. The available exciting power is proportional to the external voltage drop, or in this case the reactive drop across the tickler coil. Then $P_{exciting} = I_{eff}^2\,\omega L = 15 \times 10^{-3}$. The effective plate current for the development tubes used is approximately 4 ma. The required tickler coil impedance is then $\omega L = 15 \times 10^{-3}/(4 \times 10^{-3})^2 = 938$ ohms.

These outer space current oscillations may readily be obtained from a pentode as used in Fig. 5 and 6, and the application of a signal to the No. 1 grid will result in a simplified converter. In each circuit, a tickler coil is placed in series with the i-f transformer primary to provide feedback to the No. 3 grid, which is tuned to the local oscillator frequency. In Fig. 5 the screen is grounded for r-f. Figure 6 represents a similar circuit in which the i-f is connected in push-pull between the screen and plate, and results in increased conversion transconductance.[1] The circuit of Fig. 5 is most useful in narrow-band applications, since the plate resistance in converter use is much larger than the effective plate-screen resistance. Conversely, Fig. 6 is more applicable to wide-band circuits.

The above circuits are operated with zero d-c bias on the suppressor grid. This type of operation is desirable since greater conversion transconductance will result owing to the larger peak plate current. A grid-leak bias on the grid of the oscillator is not necessary with the outer space current oscillator, as it would have little effect on the average current.

It is desirable that the peak swing be sufficient to produce plate-current saturation during the positive excursion of the local-oscillator cycle, and plate-current cutoff during most of its negative excursion, since these are the desired characteristics for maximum conversion transconductance.

Comparisons

The most important characteristics of a converter-type tube are probably (1) conversion transconductance, (2) plate resistance, (3) noise, (4) isolation between signal and oscillator circuits, which is indicative of antenna radiation, (5) voltage gain as a function of wide-range tuning, and (6) automatic volume control, which indicates the cutoff characteristics of a particular tube and any undesirable detuning effects. These characteristics will be discussed in connection with a comparison of the new high-gain pentode converter circuit of Fig. 5 and a conventional 6BE6 frequency converter for the same narrow-band application (550 to 1,600 kc).

Before making comparative measurements, the oscillator voltage on the No. 3 grid was measured as a function of tuning. The oscillator voltage varied from 19 volts at 1,006 kc (the low end of the oscillator range) to 66 volts rms at the top frequency of 2,056 kc. This wide range of oscillator voltage is undesirable from the viewpoint of oscillator radiation, hence a series R-C circuit was used to load the oscillator. Values of 10,000 ohms and 6.8 $\mu\mu$f discriminate against the higher frequencies as desired to keep the range of oscillator voltage between 11 to 19 volts rms, which is within the practical limits of most converters.

Comparative sensitivity values are given in Fig. 5. With the experimental type pentode, the components were tuned for each individual measurement. The voltage gain was measured from the signal-generator terminals to the secondary of the i-f transformer. The i-f transformer used was designed as an output transformer, and consequently had closer coupling than that usually found in input i-f transformers. With the conven-



NEW CIRCUIT (ABOVE)			
f_{sig} IN KC	GAIN	I_K IN MA	Δf IN KC
550	580	7.3	10.6
1,000	780	7.3	12.0
1,550	680	7.4	12.0

CONVENTIONAL 6BE6 CIRCUIT			
f_{sig} IN KC	GAIN	I_K IN MA	Δf IN KC
550	140	11.0	11.8
1,000	320	10.5	11.8
1,550	300	10.5	12.1

FIG. 5—Narrow-band version of new converter circuit, suitable for broadcast band, and comparative performance data on conventional circuit

tional circuit, plate and screen voltages were 100 volts, and the signal grid was biased to −1.5 volts. The circuit was optimized for voltage gain.

The comparative data shows that greater than twice the voltage gain can be obtained with the pentode with 30 percent less cathode current. The increased voltage gain results from the increased conversion transconductance.

The conversion transconductance of the experimental pentode was approximately 1,200 μmhos. This conversion transconductance is easily determined for this type of operation by measuring the g_m of the signal grid with +10 volts on the suppressor grid, and taking 30 percent of this g_m value as the conversion transconductance. This is accurate to within a few percent.

The effective mixer plate resistance for the new type of operation is approximately three times the value measured for the tube as an amplifier. This value was 350,000 ohms for the development tubes used, as contrasted with 1 megohm for the 6BE6. The conversion transconductance of the 6BE6 is 475 μmhos.

Oscillator Radiation

Radiation back to the antenna from a converter tube depends on the capacitance and space charge coupling between the oscillator grid and the signal grid. In the circuit of Fig. 5, oscillator currents are confined to the outer space of the tube so there is little or no space-charge coupling. The capacitance from the signal grid to oscillator grid of the tube under these conditions is approximately 0.10 μμf, while the corresponding capacitance for the 6BE6 is 0.15 μμf. The relative coupling values from the oscillator to the signal grid at signal frequencies of 550, 1,000 and 1,550 kc are 0.01, 0.07 and 0.13 respectively for the 6BE6 and 0.01, 0.05 and 0.21 for the pentode.

The space-charge coupling within the tube acts with a 180-deg phase shift relative to the direct capacitive coupling voltage. In most converters, these effects are controlled so that they are approximately equal on the broadcast band. This is the reason that the coupled voltage is slightly less with the type 6BE6 in spite of the fact that its capacitance and space-charge coupling are greater.

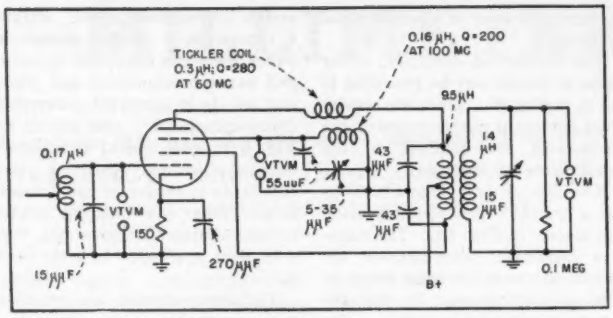

FIG. 6—Wide-band version of new converter circuit

AVC Action

The action of an avc voltage on the signal grid of the experimental pentode changes the oscillator amplitude as well as the signal-grid g_m. This gives accentuated avc action, and may require a very remote cut-off characteristic for proper operation. Since extensive bias will ultimately result in a reduction of oscillator grid g_m to the point where oscillations will cease, extended avc application (1,000 to 1 reduction of gain) is not possible in this new converter.

In conjunction with avc, it is important to consider the amount of frequency shift that results from its application. To obtain this relative measurement, the gain of the two systems was decreased by the same ratio, and the frequency shift of the oscillator section was measured. The results indicated that the frequency shift was comparable in the two systems, but in opposite directions; the frequency of the 6BE6 converter decreased with decreasing gain and the frequency of the new converter increased with decreasing gain.

F-M Converter Circuit

Modifications needed in the new converter circuit to meet the requirements of the f-m band are given in Fig. 6. The relatively wide bandwidth permits the use of a push-pull i-f and derives increased gain. At 100 mc the voltage gain from the grid through a double-tuned i-f transformer is 27.5. (The calculated gain of the 6BE6 under similar conditions is one-fourth this value.) The center of the i-f band is 10.7 mc and the bandwidth at the half-power points is 350 kc. The frequency drift of this oscillator circuit was compared with that of a triode in a Hartley circuit and found to be nearly equal. The converter had less frequency shift as a function of filament voltage, but more as a function of supply voltage.

Conclusions

Increased gain can be obtained by using a pentode tube as a converter, with the signal applied to an inner grid and the No. 3 grid used as an outer space current local oscillator. Four times the gain of the type 6BE6 may be obtained by using this less complicated tube, with 30 percent less cathode current. Simple tube construction, high conversion transconductance and low noise characterize this converter. The Sylvania type 5636 and SN1007B tubes are suitable for this application.

The author acknowledges the valuable assistance of B. F. Tyson and James Cooper who supplied measurements that confirmed the theory outlined here and John B. Grund of Sylvania's Emporium division, whose measurements in practical circuits contributed greatly to this project.

References

(1) E. W. Herold, Superheterodyne Frequency Conversion Using Phase-Reversal Modulation, *Proc. IRE*, p 184P, April 1946.
(2) E. W. Herold, Superheterodyne Converter System Considerations in Television Receivers, *RCA Review*, p 324, Jan. 1940.

Low-Reflection PICTURE TUBES

Face plates is first etched, either chemically or by liquid-honing abrasive-blasting method, to produce light-diffusing characteristic. Plates thus etched are then treated with hydrofluoric acid to restore transmission loss introduced by first etch

By G. S. SZEGHO, M. E. AMDURSKY and W. O. REED
The Rauland Corporation
Chicago, Illinois

THE HIGH OPTICAL QUALITY inherent in metal cathode-ray tube face plates has turned out to be more of a drawback than a blessing.

When these tubes were first introduced, glass tube manufacturers took steps to equal their face-plate quality by chromium plating and polishing the molds, with the result that both types today are prone to specular reflections. These reflections of external light sources in a room are more noticeable because of the dark glass now almost universally used in face plates.

Early Attempts

Attempts to reduce undesirable reflections by methods already employed in treating optical instruments have met with little success for various reasons. For example, one-quarter-wavelength thick films[1,2] are difficult to mass produce. Moreover, such films are quite fragile and give a characteristic purple tint since they are actually designed for a minimum reflection at only one wavelength, usually 5,550 A, which is the peak of the human eye sensitivity curve. Skeletonized layers, in which the constituents of the glass are etched out on the surface by hydrofluoric acid to leave only a film consisting largely of silica,[3] are also corrective for only one wavelength and have some residual reflected color.

For picture tubes one can resort to other solutions to reduce reflections, such as a polarizing filter combined with a quarter wave retardation layer in front of the tube face. These filters, in addition to the expense involved, absorb an appreciable portion of the useful light and the residual reflections are also tinted. Another possibility of reducing reflection involves scattering the light, and lacquer coatings have been tried to achieve this result.[4] However, these coatings are not durable and in most cases they

Television picture taken from 12-inch metal tube. Reflected image of fluorescent lights from untreated portion of face plate shows advantage of process

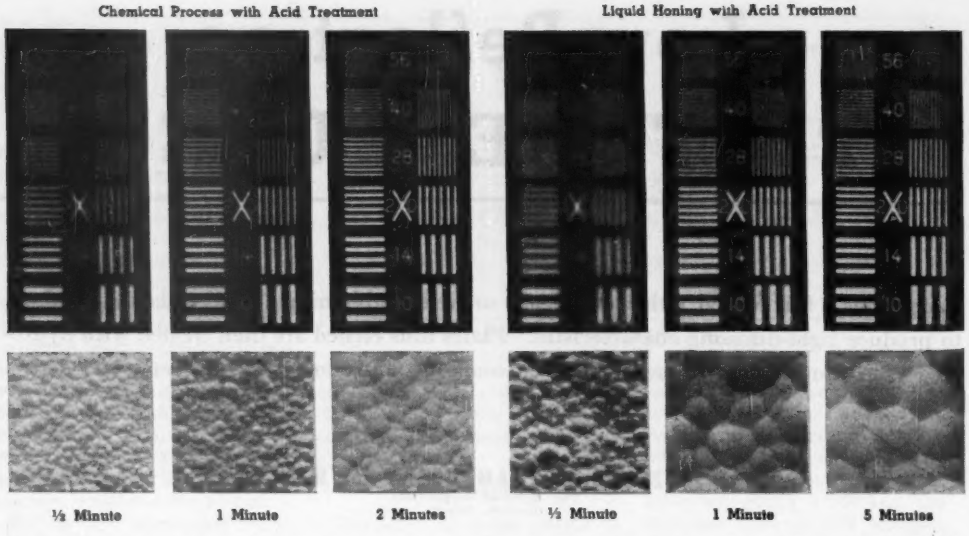

FIG. 1—Resolution test charts photographed through face plates having front surfaces treated by the two methods described and subsequently etched in hydrofluoric acid for periods of time indicated. Photomicrographs (approximately 125 microns square) below show processed surfaces

are too diffusive, thus impairing the quality of the transmitted image.

New Method

The method described in this paper when adequately controlled has none of the aforementioned disadvantages. The surface of the plate is first etched either chemically or by a liquid abrasive-blasting method known as liquid honing. The latter is a process in which the plate is subjected to a high pressure spray of abrasive particles suspended in water. Either of these processes creates a surface having a light-diffusing property, which reduces the specular reflection but also tends to deteriorate the quality of the transmitted image. The etched plate is then subjected to a treatment in hydrofluoric acid, either by dipping or spraying, until the transmitting characteristics are restored to the extent required by test resolution patterns. The result of this processing is shown in the accompanying photograph, which shows a television image as seen through a face plate only one-half of which is treated in the described manner. The untreated half clearly illustrates how the reflected image of fluorescent light tubes, for example, can obliterate the transmitted picture information.

In Fig. 1 there are a series of resolution patterns as photographed through face plates which have been surface-etched by chemical means and liquid honing, respectively, and then subjected to hydrofluoric acid for varying lengths of time. From these photographs, it is apparent that control of the acid bath is necessary to preserve the image quality of the transmitted picture. In each case reading left to right, the first plate is considered to be unresolvable; the second is just resolvable, and the third is quite acceptable.

In order to investigate the surface structure of the treated face plates, photomicrographs of these same samples were taken and are shown. As the acid treatment is continued on any particular sample from a point of minimum reflection and maximum diffusion, the hill-like structures increase in diameter and become more flattened. The acid tends to dissolve the roughened edges and smooth out the surface to some extent. The surfaces etched by chemical means are much more uniform and give a greater number of and smaller hills for the same transmitting and reflecting qualities than those etched by the mechanical method. Tests made with a surface analyzer also indicate that the chemical etch provides a much more uniform surface.

Reflection Characteristics

The reflection characteristics of these treated face plates have been studied quite extensively. Plates treated by the chemical etch method always exhibit a minimum reflection point before being subjected to acid, whereas in the case of liquid honing, the surface may be lightly etched, then brought to this minimum value by the acid treatment. This action of the acid can be seen in Fig. 2A, which is a plot of reflectivity as a function of acid treatment time. The reflection is specular before the minimum is reached and of a diffuse nature from that point on.

Measurements were made with a Weston photocell having a Viscor filter in a reflectometer built for this purpose. A collimated light beam is reflected from the surface under study at an angle of 35 degrees to the normal. A typical surface after being lightly liquid-honed has a reflection of 50 percent of that from the two sides of a conventional filter-glass face plate, or ap-

proximately 3.5 percent in terms of 100 percent from a perfect reflector.

It should be remembered that the combined reflection from the two surfaces of a clear glass face plate is approximately 9 percent. The filter-glass face plate now in general use has around 25 percent absorption, the reflection from the back surface is thus reduced to 2½ percent and the total from both surfaces to 7 percent.

Although still quite transparent, the liquid-honed surface has a misty appearance which produces a somewhat diffuse transmitted image quite objectionable for television applications. With subsequent acid treatment, however, the specular reflection decreases and the diffusion of transmitted light increases until the aforementioned minimum point of reflection is reached.

With further acid treatment the reflected light becomes almost entirely diffuse and the transmitted light becomes more specular. This behavior may be explained by the fact that the acid attacks the glass selectively wherever the surface has been broken and tends further to roughen the surface. After a period of time corresponding to the minimum on the curve, the acid becomes trapped and only the crests or high spots are attacked, thus producing a smoothing effect. This explanation is partially borne out by the fact that the negative slope of the curve is much steeper than the positive slope, indicating that the relative areas of roughened surface to smooth surface are much greater after the point of minimum reflection has been reached than before.

Limits on the residual reflection have been experimentally correlated with the resolution desired and the thickness of the plate. The resolution of a transmitted image in contact with the back surface of the treated plate is inversely proportional to the thickness. Furthermore, as the plate resolution increases, the reflection increases. In order to maintain high picture quality, these treated plates must resolve at least 2.2 lines per mm which corresponds to approximately 4.5 television lines per mm, or a definition of approximately 850 lines on a 12½-inch tube raster. It has been found that metal tube face plates which will give this resolution have a minimum reflection of 21 percent of the combined reflection from the two surfaces of an untreated filter-glass face plate which, as explained above, would correspond to approximately 1.5 percent of the total incident light. For all-glass tubes where the thickness across the face may vary from ¼ to ⅜ inch, a minimum reflection of 35 percent must be tolerated to achieve the desired resolution.

Additional Tests

Several tests were made on completed television tubes having low-reflecting faces. It was found that there is no decrease in luminance from treated face plates as measured normal to the tube. There is, however, a slight falling off as the angle of observation is increased. This directional effect of various types of tube faces now in production is compared in **Fig. 2B.** It is evident that the plates treated by the liquid-honing process are slightly more directional than those treated by the chemical etch. This is due to the fact that the former gives a heavier etch, and more attenuation is to be expected as the light passes obliquely through it. Tests to determine whether or not any color shift is introduced by the etching process have proven that there is no effect either on the axis or at large angles of observation.



FIG. 2—Plots of reflectivity as a function of time of acid treatment after liquid honing (A) and polar distribution of luminance curves (B) for picture tube face plates

It is interesting to note that tubes with treated face plates appear to be mechanically stronger than those with untreated face plates, judging by pressure tests performed on both types of tubes. Similar experience has been reported in the manufacture of incandescent glass bulbs where acid treatment followed abrasion.[5]

Thus far treatment of the outer surface alone has been considered, the inner surface remaining specularly reflective. In order to reduce or mask the reflection from the inner surface to a negligible amount, the outer surface treatment must progress farther than desired. This reflection also can be eliminated by the low-reflection treatment of the inner surface. For a given reflectivity, the outer surface diffusion can therefore be made much less with a consequent improvement in the quality of the transmitted image. Of the two processes mentioned, the liquid-honing is more suitable for application to the finished tube, in which case only the outer surface is made diffuse. The chemical abrasive process can equally well be applied to the face plate before sealing it to the metal cone and, therefore, metal tubes can be easily fabricated with both surfaces treated, with the inherent improvement in resolution.

Tests show no loss of contrast for low-reflection treated tubes under normal viewing conditions. With intense external light, however, the residual light scattered back to the viewer has the effect of lowering the contrast ratio. But, multiple reflections within the glass are actually reduced by the combined abrasive etch and polishing treatment.

The authors are indebted to Joseph A. McCormick of the Dearborn Glass Company for his cooperation and persistent efforts in the successful development of the chemical etch process mentioned above.

References

(1) John Strong, On a Method of Decreasing the Reflection from Nonmetallic Substances, *Jour. Opt. Soc. Amer.*, p 73, Jan. 1936.
(2) K. B. Blodgett, Use of Interference to Extinguish Reflection from Glass, *Phys. Rev.*, 55, p 391, 1939.
(3) P. H. Nicoll, Low Reflection Films on Glass by an Improved Chemical Method, *RCA Rev.* p 440, Sep. 1949.
(4) Steadman, U. S. Patent 2,419,177.
(5) Pipkin, U. S. Patent 1,687,510.

ADJACENT-CHANNEL

By HENRY MAGNUSKI

Chief Engineer
Research Department
Communications and Electronics Div.
Motorola, Inc.
Chicago, Ill.

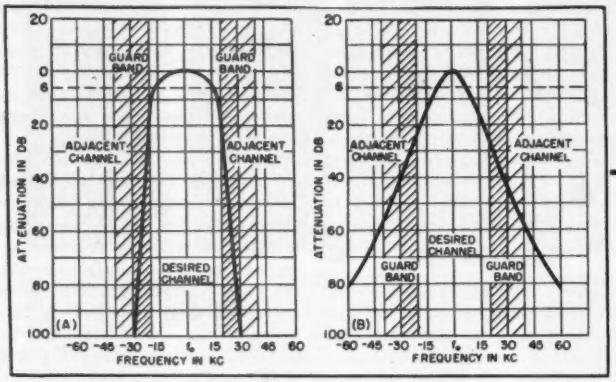

FIG. 1—Desirable selectivity curve is shown at *A*. The curve of a conventional Motorola receiver is shown at *B*

THE FREQUENCY SPECTRUM available for radio communications remains the same but the need for new channels is ever increasing as the number of applications and the number of users of electromagnetic waves increases. The problem of obtaining more useful channels is particularly acute in television and in mobile communication systems.

One solution to this problem would be to go to higher frequencies where more bandwidth is available. Some services such as radio relays and other point-to-point radio communication could be transferred to frequencies above 200 megacycles, but this is not necessarily the case with the mobile service. In this service the requirement of line-of-sight is not often fulfilled and so the ground wave must be relied upon. Such a wave is not propagated well even at frequencies as high as 200 megacycles and shadow effect becomes more and more pronounced as the frequency increases.

On the other hand, in thickly populated cities the waveguide effect of the streets may cause, at higher frequencies, considerable condensation of electromagnetic waves, usually accompanied by pronounced standing waves. In this special case, higher frequencies may be well suited for communication, but in general, mobile communication systems should operate in the region below 200 megacycles. For this reason, closer channel spacing and the ability to use adjacent channels are both very important in the mobile service.

The receiver design principles to be outlined were first applied to receivers for the mobile service, and for this reason an f-m receiver working in the 152 to 162-mc band has been chosen as an example, although the principles are by no means limited to this field and could be applied with equal benefit to any a-m, f-m or television receiver.

Requirements

For successful adjacent-channel operation, a sufficient rejection of the unwanted signal should be achieved at the edge of the adjacent channel. The receiver should accept the band of frequencies required by the received signal and its modulation sidebands without appreciable attenuation. Therefore, a rather rapid transition from no attenuation to full attenuation has to occur. This transition has to occur within the so-called guard-band which is an unused narrow band between channels in which no modulation exists. Figure 1A shows a desired practical shape of selectivity curve. The ideal square selectivity shape is not practical because it has two discontinuity points and infinitely steep sides. The performance of such a square curve would not be satisfactory because of nonlinear phase characteristics.

Figure 1B shows for comparison the average selectivity curve of an ordinary receiver obtained by using several tuned circuits. Usually the top of the curve is not wide enough and the sides of the curve are not steep. It takes the whole adjacent channel, not just the narrow guardband, before substantial attenuation is obtained. In addition, the shape of this curve depends greatly upon the tuning of the individual circuits and it will vary from day to day due to change in temperature.

The minimum receivable signal can be easily determined from the theoretical noise and the noise figure of the receiver. For example, for a 40-kc bandwidth f-m police receiver, the theoretical noise is equal to KTB or $4 \times 10^{-21} \times 40 \times 10^3$ watts, or 158 db below a watt. Assuming the practical noise figure of a receiver to be 12 db, the noise level will be 146 db below one watt or 0.35 microvolt at the 50-ohm antenna input cable. A carrier giving 20-db quieting will, in this case, be of the order of 0.5 microvolt, which may be considered the weakest usable signal.

The strongest unwanted signal which can be rejected by the receiver depends greatly on the desensitization and intermodulation characteristics of the receiver. By desensitizing we mean the phenomenon occurring when a strong signal decreases the total gain of the receiver. This is generally caused by the grid voltage on one or more tubes swinging into the positive region and thus building up additional bias or loading the grid tuned circuit (or circuits) by grid current.

REJECTION RECEIVER

Desensitizing by strong local stations just outside desired-frequency guardbands, as well as intermodulation and spurious responses, is minimized by concentrating selective elements largely ahead of amplification. Hermetically sealed passive bandpass filter is heart of system

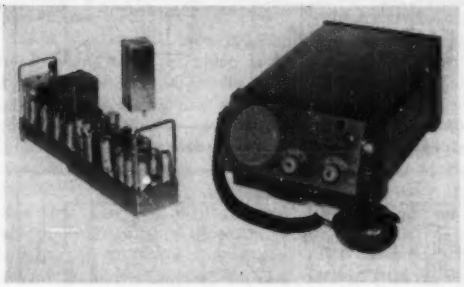

Strip receiver chassis, one filter and complete mobile unit which incorporates some of the design techniques described

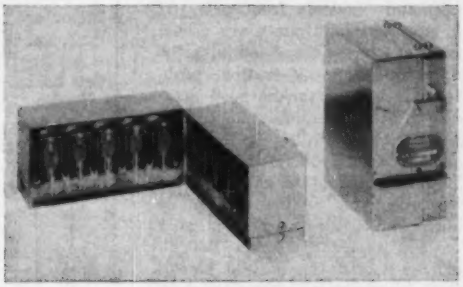

FIG. 3—Cutaway view of passive filter and a complete cased unit for a receiver

Situations frequently arise, particularly in mobile communication practice, where a police car, for example, has to receive messages from a remote station, or another police car, while it is operating in the close vicinity of the transmitter of a taxicab company, which may be on the adjacent channel. Under such conditions many receivers are completely desensitized or blocked by this high-level signal.

The amount of unwanted signal which can be tolerated depends greatly on the receiver construction. In an average receiver, the first r-f tube has a grid bias of the order of 0.7 volt, and this would be the peak voltage acceptable, the rms value being 0.5 volt. Assuming an input tuned circuit step-up ratio of 5 to 1, a 0.1-volt signal at the antenna input is all that can be tolerated. This means that the selectivity that can be expected in the receiver is 0.1 volt to 0.5 microvolt or 106 db. Practically, most receivers have a much lower limit, because they build up the gain before selectivity, which is obtained in the last i-f stages.

Intermodulation

Another problem resulting from crowding of the spectrum is intermodulation. If there are two strong transmissions on frequencies $f \pm \Delta f$, and $f \pm 2\Delta f$, where f is the receiver frequency and Δf is the channel spacing (or some multiple thereof), then the second harmonic of the first transmission will be generated in the receiver because of nonlinearities in the amplifying tubes, usually the mixer stage and possibly the r-f stage. This second harmonic, whose frequency is $2f \pm 2\Delta f$, will beat with the $f \pm 2\Delta f$ transmission and create a beat note of frequency f. Once frequency f has been created in a receiver, no amount of selectivity of the i-f circuits can prevent interference. This interference may be weak, so that it merely opens the squelch in the absence of a desired signal, causing annoyance, or it may be so strong as to completely block the receiver. If the signals on adjacent channels are properly spaced

FIG. 4—Stages of a mobile receiver employing the design discussed in the text

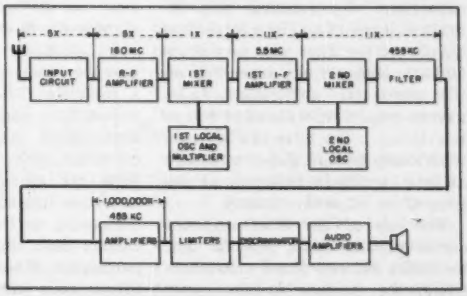

FIG. 2—Block diagram of new receiver using the passive bandpass filter



frequency-wise, a very small nonlinearity in receiving tubes is sufficient to create a pronounced interference, and consequently the intermodulation will exist with signals much weaker than necessary to desensitize the receiver.

The spurious responses of a receiver, such as image frequency, or frequencies obtained by beating with some multiple of the local oscillator crystal frequency (if crystal and multipliers are used), are not exactly connected with the adjacent-channel operation problem. It is nevertheless good practice to keep them down, since, with the present crowding of the spectrum, strong transmission at any frequency should be expected. If the selectivity of the receiver is such that it rejects a transmission on the adjacent channel 100 db stronger than the desired signal, then, consistently, all the spurious responses should be 100 db down.

Band-Pass Filter

A design illustrated in the block diagram of Fig. 2 features:

Separation of selectivity and amplification.

Placing all selectivity-determining elements in front of the amplifier stages.

Obtaining a suitable (approaching a square top) selectivity curve by using passive band-pass filter technique at a suitable low frequency.

Design of an input circuit, in front of this filter, consisting of one or more frequency converters with a minimum amount of amplification (consistent with good signal-to-noise ratio) and maximum spurious rejection.

The passive band-pass filter is the heart of the receiver and can be built by using several coils and capacitors in constant-*K* and *M*-derived sections. The center frequency of the filter can vary from 50 kc to some 20 mc, depending on the particular application (a-m, narrow-band f-m, wide-band f-m or television). The filter can be made with sharp enough slopes to assure at least a 100-db rejection at the edge of an adjacent channel.

The top of the filter response curve could be made very flat but, to obtain desired phase characteristics, the corners of the curve should be reasonably rounded. Such a filter gives a stable and permanent performance since once the filter is factory adjusted and sealed there is no need or possibility of readjusting it in the field, and therefore the selectivity characteristics of the receiver remain constant. Should the need arise to change the width of the channel, or the selectivity characteristics, a simple exchange of the filter will permit this, since the filter is the only factor determining selectivity. Also, in television practice, the curve obtained by the filter can be of any desired shape, and as perfect a vestigial operation as may be required for good video reception can be had by properly designing the filter.

To illustrate how such a filter may be constructed, Fig. 3 shows a complete factory-sealed and adjusted filter used in a mobile communications receiver, and also a cut-away view. The coils of the filter are adjusted by iron slugs and then are sealed completely in compound, so that they will never change their characteristics. This particular filter is composed of fifteen coils arranged in more or less conventional constant-*K* and *M*-derived sections.

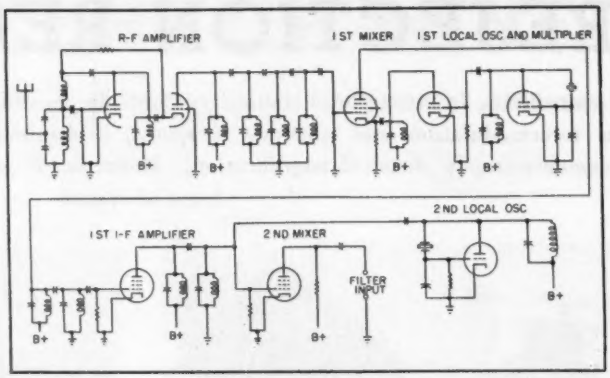

FIG. 5—Schematic of front-end for the receiver shown in Fig. 4

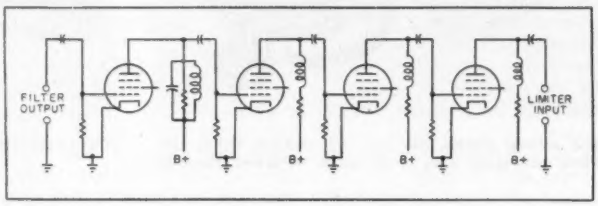

FIG. 6—Circuit of i-f amplifier

Receiver Input

The head end starts with an antenna matching circuit followed by an r-f stage. The well-known cascode circuit can be used for maximum signal-to-noise ratio. The selectivity should be sufficient to reject the image frequency by about 100 db. Since the filter following the head end works on a relatively low center frequency, the image frequency is usually too close to the desired frequency. Therefore, in general, in f-m receivers two converters are used, one converting to a 5 to 10-mc first i-f, and the other to the filter frequency. In this way, sufficient image rejection can be obtained by using two or more loosely coupled tuned circuits in both r-f and first i-f stages.

The gain of every head-end stage should be held at a minimum consistent with good signal-to-noise ratio. If most of the noise is generated by the first tube and not by the antenna circuit, as often happens in vhf receivers, it means that the voltage gain between the first

tube grid and the second tube grid should be approximately three, assuming that the same amount of noise is generated by both tubes. In this way the second tube will add only approximately five percent to the noise voltage of the first tube because the resultant noise is the square root of the sum of the squares of the voltages. This will practically not affect the signal to noise ratio.

From the second tube on, the gain should be unity since it is better to take some slight increase in noise voltage (roughly five percent per tube) than to amplify the signal and risk desensitizing and intermodulation. If one of the front-end tubes generates more noise than the first r-f tube, the gain in front of this tube has to be adjusted upwards accordingly. The low gain requirement permits use of several under-coupled circuits, thus converting extra gain encountered in the plate circuits into additional selectivity necessary for image and other spurious rejection. This also permits limiting the radiation of the local oscillator from the antenna since the under-coupled circuits will effectively prevent the local oscillator energy from penetrating into the antenna.

The design of the mixer stage requires particular attention. Low noise and minimum of distortion to signal and oscillator voltages are required since distortion produces the second harmonic which is essential for intermodulation.

An example of a mobile communication receiver is shown in the block diagram of Fig. 4. The schematic of the front end of this receiver is presented in Fig. 5.

The antenna circuit gives a voltage step-up of about 5. The r-f amplifier consists of a twin-triode cascode circuit with four under-coupled circuits as a plate load. The cascode circuit may be used as an r-f stage in place of a pentode but its advantages are less pronounced at lower frequencies and the complications connected with its use are not always warranted.

The first mixer uses cathode injection and is designed for a minimum of distortion. The first i-f consists of two pair of double-tuned undercoupled circuits, with the gain of the amplifier adjusted to just overcome the insertion loss of the tuned circuits. By using high-Q tuned circuits and high first-mixer gain, or possibly by using another sealed filter in place of tuned circuits, this amplifier tube can be omitted. The second mixer is conventional, to change the center frequency from 5.5 mc to the 455-kc filter frequency.

The construction of the amplifier which follows the filter is not critical. No selectivity is required, and therefore resistance-coupled stages can be used although, sometimes, single-tuned stages provide better gain and stability. The total gain required is rather high but since the frequency is low no special problems are encountered. A typical amplifier is shown in Fig. 6. This four-stage circuit operates at 455 kc with an overall gain of about 120 db.

The output portion of the receiver follows the amplifier and consists of any conventional detector, or limiter and discriminator, followed by an audio amplifier. Its design need not differ from usually used techniques, although in f-m receivers, because of the very low filter and amplifier frequency, special circuits such as a frequency counter or slave multivibrator could be used in place of the discriminator.

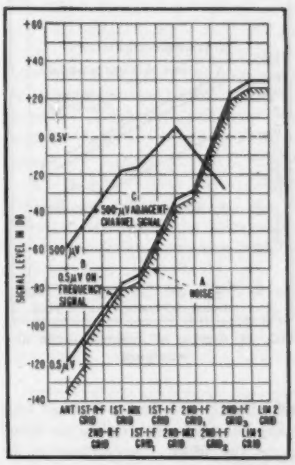

FIG. 7—Distribution of gain through conventional f-m receiver



FIG. 8—Selectivity curves of a conventional receiver

Conventional Receiver Performance

When the gain and the selectivity of each stage of a conventional receiver is known, curves similar to those shown in Fig. 7 can be drawn. The abscissas of this drawing show convenient points at which the signal can be measured, such as antenna input, r-f grids, mixer grid, and all grids of the following stages. The ordinates show the signal strength at various stages. The 0.5-volt signal was arbitrarily chosen as 0-db level, since this is the maximum signal which can be tolerated by most receiving-type tubes.

Curve *A* shows the receiver noise. It is about —110 db at the first r-f tube since noise equivalent to 1.75 microvolts on the grid was assumed to be generated by this tube. This noise is amplified by the successive stages and finally it has an amplitude sufficient to saturate the last limiter (10 volts or plus 26 db assumed). A weak 0.5-microvolt, or —120-db, desired signal (curve *B*) can likewise be traced through the receiver. Curve *B* will be essentially parallel to, and will lie above, noise curve *A*.

Assume a somewhat stronger signal of 500 microvolts, or —60 db, on the adjacent channel, curve *C*. Since the signal is off frequency, the gain of each stage for this signal will be less by the amount of selective rejection by that stage. Unfortunately, the first stages of the conventional receiver are never very selective.

Curves of Fig. 8 show the relative selectivity of an antenna stage, an r-f stage, a first i-f stage, a second i-f stage, and the total selectivity of one conventional receiver measured. Resonance of the antenna tuned circuit is generally

very broad and the off-frequency signal will be amplified about the same amount as the on-frequency signal. Thus curve *C* of Fig. 7 runs parallel to curves *B* and *A* between the antenna and the first r-f grid. The same is true for the r-f stages if the disturbing signal is close by in frequency, and so curve *C* is practically parallel to curve *B* up to the i-f stages.

Curve *C* exceeds the zero-db level at the second mixer stage, and some serious desensitizing will occur at this stage. If the signal is on an adjacent channel, and is accompanied by another one on the next to the adjacent channel, a serious intermodulation will occur, probably at the second-mixer grid even if the signal should be weak enough not to cause desensitization. The intermodulation is very detrimental, and if stronger than the desired signal, will completely obscure it. The desensitization, if moderate, is not necessarily completely detrimental to reception as some additional gain is generally available, especially in f-m receivers and a-m receivers with agc. The most common result of moderate desensitization is deterioration in signal-to-noise ratio in f-m receivers and cross modulation in a-m receivers.

One more thing should be mentioned about receivers with distributed gain and selectivity, namely, the dependence of selectivity on the strength of the applied signal. If a receiver could receive a weak desired signal, say 0.5 microvolt, in the presence of an undesired off-frequency signal, say 60 db stronger, it may be unable to do so for desired signals of an order of 5 microvolts for two reasons. One reason is that the signal 60 db stronger than 5 microvolts may now completely desensitize the receiver to the point where one tube is biased off. The other reason in f-m receivers is that the last i-f stages, which contribute most to the selectivity, are now saturated and will not contribute to the selectivity of the receiver.

New Design Performance

The noise and signal curves for our new receiver are shown in Fig. 9. The noise (curve *A*) is amplified only by the first r-f stage and is kept at this slightly higher level up to the filter. Amplification is necessary so that the noise contribution of other tubes may be insignificant. The desired signal (curve *B*) runs parallel to the noise curve. The big difference is shown in the off-frequency signal, curve *C* (as compared to curve *C*, Fig. 7). This signal is only slightly amplified in the first r-f stage, then it is slightly weakened by the following stages because they are adjusted to unity gain (for the desired signal) and have some selectivity, and finally is completely rejected by the filter (100 db or more) and drops below the noise level before being amplified. The unwanted signal is never permitted to desensitize the receiver, and hits the first mixer grid at a relatively low level so that intermodulation, which most often takes place there, is lower than in conventional receivers. Even a much stronger signal of 35,000 microvolts (curve *D*), which would be ordinarily completely detrimental, barely exceeds the desensitizing level at the mixer grid.

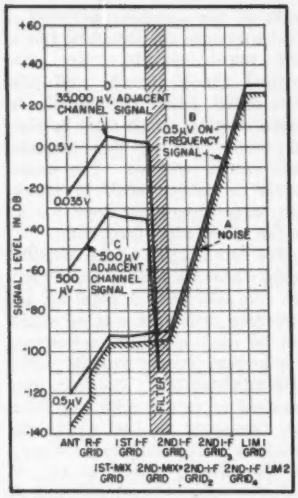

FIG. 9—Distribution of gain through new f-m receiver



FIG. 10—Curves of intermodulation interference

The intermodulation curves show marked improvement despite the fact that no special means of improving linearity and decreasing intermodulation were used. Intermodulation curves of the first new receivers are shown in Fig. 10. Curve *B* is for signals 120 kc and 240 kc away at 160 mc. Curve *A* shows the intermodulation of the old Motorola receiver for comparison. Curve *C* is for the new receiver when the separation was decreased to 60 kc and 120 kc. This curve could not be duplicated on the old receiver because of insufficient selectivity.

For all curves, the coordinates are in decibels above an arbitrary zero level. This zero level was chosen as the power of a desired signal which is just sufficient to give 20-db quieting of the receiver. In this case it was 0.5 microvolt. The ordinates give the power level of the $f \pm \Delta f$ signal and the abscissas that of the $f \pm 2\Delta f$ signal. Each curve is the locus of points for which 20-db quieting, due to intermodulation, was obtained. The curve is linear over the greater portion of its length but curves at the ends where either of the two signals reaches a certain level. This effect is due to desensitization. The level of the $f \pm \Delta f$ signal has to be relatively stronger than that of the $f \pm 2\Delta f$ signal. This is to be expected since efficient generation of the second harmonic of the $f \pm \Delta f$ is necessary for intermodulation.

Gratitude is expressed to D. E. Noble, Vice-President and Director of Research of Motorola Inc., under whose direction the project was developed, and to James Clark, who made most of the laboratory measurements and constructed a successful laboratory model.

Solenoid Motor Control

Position of idler roll, raised or lowered by continuous strip of material moving toward wind-up roll, varies the direct current flowing through a saturable reactor in thyratron motor speed control circuit

By GEORGE M. CHUTE

Application Engineer
General Electric Co.
Apparatus Dept.
Detroit, Mich.

VARIABLE speed is required when a wind-up roll as used for cloth, wire or strip metal is driven from its center shaft. For automatic control of this speed, a small solenoid may be used, with its accessory electronic unit, to furnish the speed signal to the motor-armature circuit of a Thy-Mo-Trol electronic drive.

In Fig. 1, the armature of a solenoid is moved when a dancer roll is raised or lowered by a continuous strip or web of material passing onto a wind-up roll driven by motor M; in this way the material is wound under constant tension. As the roll becomes larger, the motor speed must be decreased if material is received at nearly constant rate.

If the roll pulls the web faster than it is supplied, the web raises the dancer roll, withdrawing the solenoid armature; this movement increases the current in both triode sections of V_3 so that more voltage is produced across R_1. Part of this voltage is used as a speed signal for the electronic drive; it raises the grid voltage of V_2, increasing the voltage across R_2. This lowers the V_1 grid potential and decreases the direct current in the saturable reactor SX, increasing its impedance.

The a-c windings of SX are in a phase-shifting bridge with R_3, to vary the phase of the a-c voltage applied to the grid transformer T_2. As the direct current in SX decreases, thyratron tubes A and B are phased off (fired later in their half cycles of anode voltage) so that the motor armature receives less voltage. This reduces the motor speed so that the web holds the dancer roll and the solenoid armature at a new position; the whole circuit becomes a closed-cycle system that regulates the solenoid and the motor speed to match the increasing size of the roll.

Tube V_3 acts as a full-wave rectifier to produce a d-c voltage across R_1. Although V_3 is a high-vacuum tube, its grid circuits include a phase-shifting network comprising R_4 and the solenoid coil, connected across power transformer secondary S_1 so as to produce out-of-phase a-c voltage across R_2 and R_3.

The solenoid acts as a variable inductance. Withdrawing the armature decreases the solenoid inductance, letting more alternating current flow through its coil.

As the solenoid armature is withdrawn, the a-c voltage across R_3 becomes more nearly in phase with the anode voltage of the left-hand section of V_3; similarly, the a-c voltage across R_2 becomes more nearly in phase with the anode voltage of the right-hand triode section. This increases the plate currents of both triode sections, so that more electrons flow from the centertap of S_2 through R_1, producing a pulsing d-c voltage across R_1. This is filtered by capacitors (not shown) in the electronic drive to make terminal A of R_1 more positive.

As terminal A rises in voltage and increases the current of V_2, less current flows in V_1 and the d-c winding of SX, so that the thyratrons of the motor control system fire later and apply less voltage to the motor armature. The motor receives constant field current through other tubes not shown.

Top speed of the motor is set by the speed control potentiometer in the electronic drive. Even with no voltage across R_1, the grid voltage of V_2 cannot be lowered below the speed control slider potential.

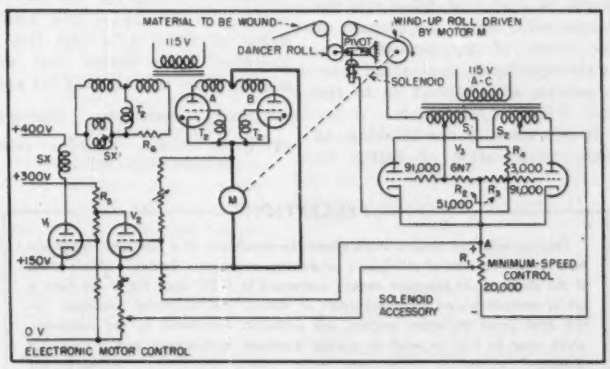

FIG. 1—Circuit of the electronic motor speed control and method of connecting solenoid attachment that is actuated by the dancer or idler roll

From a forthcoming book by the author to be published by McGraw-Hill Book Co., Inc., entitled "Electronic Motor and Welder Controls".

TELEVISION PICTURE FIDELITY——

By
MILLARD W. BALDWIN, Jr.
Bell Telephone Laboratories
Murray Hill, New Jersey

WHAT IS MEANT by picture fidelity in standard home television?

The answer ought to be in the published standards on television, but a search of the IRE Standards, the RMA Standards and the ASA Standards shows only lists of factors that are said to affect picture fidelity. What it is, they don't say.

This lack of a published standard definition illustrates that picture fidelity involves something more than the simple physics of image formation, something more than the transmission system that connects the lens of the camera to the screen of the picture tube. That something more, that vital factor that standardizing committees can't agree on, is perception.

Perception opens the door to a better understanding of picture fidelity, by explaining how the television viewer, looking at his picture tube, sees what is before the lens of the distant camera.

In audio, fidelity is defined as the degree with which the output of a system accurately reproduces the essential characteristics of the input. Extending this to television, it might be said that fidelity is the degree with which the picture on the screen of the receiver accurately reproduces the essential characteristics of whatever is in the field of view of the camera.

It will simplify our thinking, to limit consideration of fidelity to cases of live pick-up under controlled conditions, ignoring for the moment such things as spot news and sporting events, and the use of motion picture film at either end of the system.

The list of factors that the standards say affect picture fidelity is comprehensive, and includes 14 items, most of them self-explanatory. The list follows:

(1) Number of scanning lines
(2) Number of frames and fields per second
(3) Percentage of time allotted to blanking
(4) Geometric distortion
(5) Aspect ratio
(6) Focus
(7) Interlace
(8) Highlight brightness
(9) Brightness range (contrast range)
(10) Black level (d-c insertion)
(11) Transfer characteristic (half-tone characteristic)
(12) Resolution (resolving power, definition)
(13) Electrical response (gain and phase vs. frequency, bandwidth, or transient response)
(14) Noise and interference

To use the list, a standard test chart, a flat card with geometrical figures and gray scales, is placed before the camera. Equipment which is well adjusted in all 14 items often turn out pictures of all degrees of fidelity.

The standard list covers the physics of image formation rather completely (except for the spectral response of the camera tube, which might be added as a 15th item). However, three things that are missing from the standard list are:

(1) Studio techniques (lighting, make-up, scenery)
(2) Home viewing situation (size, surroundings, lighting)
(3) Capacity of the individual observer to look at the picture and see what is not there

The key to picture fidelity is in these three missing factors. Imagine what would happen if the observer could see what really takes place on a picture tube—a flickering spot of light moving repeatedly over a flat screen, downwards at about 30 miles an hour, sidewards at about 3 miles a second. If he saw that, there would be no television.

Perception Process

As a reproduction, a television picture lacks four things:

(1) Continuity (flicker, line crawl, stroboscopic effects)
(2) Size (not life size)
(3) Color
(4) Depth (distance)

These four things are the essential characteristics of the input. They are not transmitted, as such. They are contributed by the observer out of his own experience, without conscious effort, without appreciable delay. This act of contributing is a part of the process of perception. We all perceive by the same process, yet individual perceptions of a given picture or object do not always agree, because our individual experiences and skills at learning and recognizing are seldom the same.

The observer does not see the flickering spot dashing over the screen of the picture tube but he sees familiar objects (people, rooms, tables, windows), and he sees these objects in motion. He sees them as good solid objects, rounded where they should be rounded, and arrayed at different distances from him. He sees distance as a separate thing in the picture, and size as a separate thing, and illumination as a separate thing. These are his habits of vision, the facts of visual perception.

The practical consequence is that high fidelity is not automatic in television. It requires the skill and

PERCEPTION

The psychological factors which affect the excellence of a television image are here reviewed by one of television's outstanding engineers. Baldwin's classic study of the sharpness of television images, performed in 1939, freed the tv art from a servile attitude toward the equalization of vertical and horizontal resolution. In this brief paper he treats matters, not ordinarily considered by the engineers, which must be kept in mind to achieve maximum performance from a television system.
—The Editors

Consideration of the various factors involved in the physics of image formation on a television picture tube, and discussion of inherent limitations and attributes of the overall system and its production techniques

ingenuity of camera men, electricians, set designers, make-up men, sound men, and the whole production staff. At the receiver it requires favorable viewing conditions, not too much stray light, not too much image structure due to pairing or interference, not too much specular reflection from the tube face, and so on. In addition to these things that cannot be standardized, high fidelity requires a proper equipment line-up with respect to the 14 items in the list.

Consider some of the mechanical limitations of the present television system, and how these limitations interfere with picture fidelity. The most obvious limitation is that the system has, in effect, only one eye. This isn't as serious as it sounds, because binocular vision is by no means essential to the perception of depth and distance, as we shall see presently. However, when a two-eyed observer looks at a one-eye picture on a flat screen, he may receive conflicting cues to depth and distance, especially if his attention is drawn to the flat screen by line structure, or noise, or surface reflections. The next time you see a noisy picture, notice how little depth it has.

Another system limitation is in angular field of view. The natural field is about 160 degrees wide by 120 degrees high, without moving head or eyes. An image orthicon camera, with a 50-mm wide-angle lens, has a field 36 wide by 27 degrees high, and if the 135-mm medium-angle lens is used, the field is only 13.5 wide by 10 degrees high. The camera sees a great deal less than an observer in the studio. In particular, it never sees the main sources of illumination but puts them all outside the field, so that the shadows they cast may appear rather artificial and extreme.

Field of view is a limitation at the receiver, too. If you sit 4 feet away from a 10 or 12-inch receiver, the picture field is again only 13.5 wide by 10 degrees high, as compared to your natural field of about 160 by 120 degrees. Your eyes adapt to the room light, not to the picture, and because you don't adapt to the picture, brightness changes in it may tend to appear rather extreme.

A final system limitation is the lack of mobility of the camera lens, both in focus and in rotation. The camera focus does not follow your line of sight the way the focus of your own eyes does. A fuzzy background in television stays fuzzy no matter how hard you look at it, quite unlike what happens in direct vision. Then again, when the camera moves, the lens moves rigidly with it, quite unlike what happens to your eyes when you move around. At slow speeds you seem to move about with the camera, but let it move a little too rapidly and you find yourself stationary while the background goes whizzing by.

These three system limitations, the use of a single lens, the restricted fields of view, and the lack of mobility in the lens, all conspire to interfere with picture fidelity by introducing conflicting cues and artificial appearances.

There are some 10 cues to depth and distance; 8 of them are monocular cues, only 2 are binocular. You are so accustomed to these 2 binocular cues that you are usually completely unaware of them. The first is double images—objects in your line of sight and remote from your point of regard always appear double if you think about them. This cue never occurs in television. The second is different images in the two eyes, a completely unconscious effect. In television this is a conflicting cue, since by means of it you may be able to see that the picture is indeed flat.

The remaining 8 cues to depth all work fine with one eye, or with one camera lens.

(1) Overlap—near object overlaps far one. (*Life*, Jan. 16, 1950, for example.)
(2) Motion parallax — near object moves against you, far one moves with you. This cue results only from camera motion. There can be no motion parallax in the flat image on a picture tube.
(3) Size—nearer object is the larger. The Zoomar lens utilizes this cue to distance. A Zoomar shot is not as realistic as an actual dolly shot because there is no motion parallax with the Zoomar.
(4) Relative sizes of familiar objects.
(5) Places where objects rest on the floor—the nearer the object, the lower is its resting place.
(6) Brightness — nearer object is brighter.
(7) Highlights and shadows—reveal contours and fine texture. Highlights and shadows are often not seen as such, but as shape and illumination separately.
(8) Linear perspective. Man walking away actually subtends a smaller visual angle, but he is perceived as of constant size and increasing distance.

These 8 monocular cues to distance are all used by the studio technician to build fidelity into the television picture. Some, like overlap, require no skill at all. Others, like motion parallax and linear perspective, succeed in proportion to the experience and ingenuity of the studio crew. The use of highlights and shadows to create roundness and depth is an art.

The impression of distance is often enhanced by using short-focus lenses to exaggerate the perspective. An image orthicon picture, taken with a 50-mm lens, has correct perspective when viewed at only 2 times the picture height. One of the rewards of sitting further back is an increased illusion of depth in the picture.

A new definition of picture fidelity is proposed. In television, picture fidelity is the degree of perfection reached in creating the illusion of motion, the illusion of size, and the illusion of depth.

References

(1) Ralph M. Evans, "An Introduction to Color," John Wiley and Sons, New York, 1948.
(2) Merle Lawrence, "Studies in Human Behavior", Princeton University Press, Princeton, N. J., 1949.
(3) E. G. Boring, H. S. Langfeld and H. P. Weld, "Foundations of Psychology", John Wiley and Sons, New York, 1948.

Static Magnetic Memory

By MARSHALL KINCAID
Harvard Computation Laboratory
Harvard University
Cambridge, Mass.

JOHN M. ALDEN
New Products Director
Alden Products Co.
Brockton, Mass.

and

ROBERT B. HANNA
Technical Sales
Alden Products Co.
Brockton, Mass.

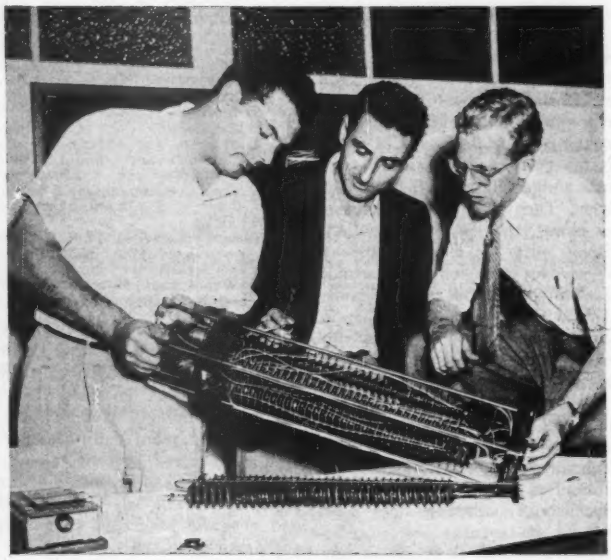

Prototype model of a 100-core static magnetic memory unit for use in the Mark IV computer at Harvard Computation Laboratory is composed of four vertically stacked banks of magnetic cores

LARGE-SCALE digital calculating machines have made many valuable contributions to fields in which the information handled is both extensive and complex. Typical applications have involved the solution of complex engineering and mathematical problems, such as the evaluation of Fourier series, the numerical solution of differential equations, and the solution of linear systems.

The machines used in this type of large-scale information handling are characterized by high cost; in many cases, they represent expenditures of one-quarter of one million dollars.

Progress made in this field has stimulated thinking concerning the possible application of less costly electronic computers to problems of information control and data-handling encountered in daily operation of business and industry. The high level of interest is indicated by the suggested application of computers to automatic continuous auditing, accounting and inventory systems, and automatic vending machines.

Less costly, less complex and practical machines for this type of business and industrial use certainly do not have to await ultimate perfection of ultrahigh-speed techniques. Operating speeds of the order of 30 kc, entirely practical at the present time, are sufficiently high to make machines of this type valuable. Furthermore, many of the necessary techniques and components for the design and manufacture of machines for medium-speed business use are either now available or becoming available.

Magnetic Material

One of the newest components, called the Static Magnetic Memory, should permit substantial advances to be made in the improvement of computing machinery for business and industrial applications. The development of this device is an outgrowth of a discovery by German scientists during the last war of permanorm 5000Z, a material that has a rectangular hysteresis loop of low coercive force. A similar material known as Deltamax is now produced in this country by Allegheny Ludlum Steel Corp. Howard Aiken of the Harvard Computation Laboratory foresaw the possible use of such a material, because of its two stable-state characteristics, as a means of information storage in large scale digital computers. His basic idea has been implemented and carried out during the past two years by the work of Dr. An Wang and Dr. Way Dong Woo.

The device provides permanent information storage comparable to magnetic drum storage, but independent of mechanical mechanisms. A variable information handling rate is available ranging from zero to 30,000 pulses per second, with probable future increases in the present upper limit. Pulse storage is provided without

for Low-Cost Computers

Magnetic material having a rectangular hysteresis loop provides information storage independent of mechanisms, variable data-handling rate up to 30,000 pps and pulse storage without power. Aids in design of computing machines for business use

power being required.

The static magnetic memory operates essentially as a magnetic trigger pair, which requires no vacuum tubes to maintain position. The trigger-pair action depends on the state of the core material being represented by a point at either the top or bottom of the hysteresis loop, as in Fig. 1. This necessitates the use of a core material whose hysteresis characteristics approximate the ideal square loop, shown in Fig. 1.

Hysteresis Curve

The hysteresis curve of Deltamax, Fig. 2, shows that this material is quite suitable for this application, due to the rectangularity of its loop. Because of the flat top and bottom of the loop, once the core is saturated in a given direction, further application of current pulses that tend to saturate the iron in the same direction will cause no further change in flux, and therefore will not produce any pulses in the output winding of the core. However, the first current pulse of an opposite polarity that occurs will cause an extremely large change in flux, thereby producing a pulse in the output winding. The presence or absence of a pulse is thus determined by the previous history of the iron core.

With several cores connected as in Fig. 3, the state of the preceding core can be transferred from that core to the next, provided suitable rectifiers are added to the basic circuit to prevent the backward flow of current. Rectifier 1 allows the current produced in the output winding of the first core to enter the input winding of the second core, and prevents any flux generated in the input winding of the second core from returning to the output winding of the first core.

Rectifier 2 allows all current provided by the output winding of the first core to enter the second core and provides a path for the current from input winding of the second core to be dissipated in the resistor instead of upsetting the first core. By alternately pulsing the advance windings of even and odd-numbered cores the state of any core relative to the hysteresis loop (Fig. 1) may be transferred to the succeeding core. Typical pulse patterns of this operation are shown in Fig. 4.



FIG. 1—Ideal hysteresis loop



FIG. 2—Hysteresis loop of Deltamax core material

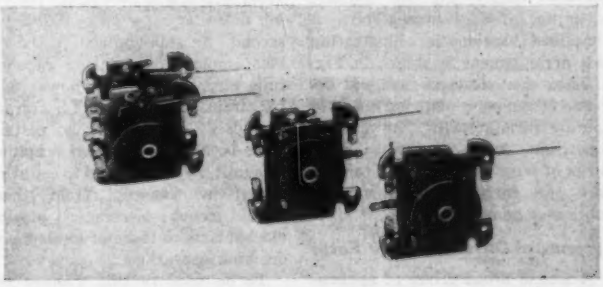

Single magnetic cores are shown in the center and at the right, at left is a pair of cores. The hollow rivets permit stacking

Magnetic tape, magnetic drums, acoustic delay lines and other devices all accomplish a similar storage function. In this device, after information has been once stored, the cessation of power leaves the stored information unaffected. Furthermore, signal regeneration is unnecessary, for the device can continually store and circulate the pulses without attenuation. Fundamentally, the static magnetic memory differs from functionally similar devices in that it accomplishes pulse storage by electrical means without

employing complex vacuum-tube circuits, in a manner completely independent of the mechanical operation found in some of the other storage devices.

The static magnetic memory device has already proved useful as a means of storing information, as a means of transferring information between systems of different pulse rates, as a counter in which any configuration of pulses may be counted or circulated, and as a means of transferring information from serial form to parallel form, or vice versa.



FIG. 3—Delay-line circuit of two cores per digit



FIG. 4—Flux versus time curve in the two-core circuit. At (A), information 1010111010 is displayed at a rate of 2.5 kc. At (B), information 0011101010 is shown at 25 kc



FIG. 5—Advance winding pulsing by means of tube plates. Evennumbered core advance windings are all in series



FIG. 6—Method of transferring high-speed pulses on magnetic tape to a slow-speed pulse system

Storing Information

Whenever a time delay of any length is necessary between incoming pulse information and its later use, this device can continuously cycle or dormantly store the information pulses without attenuation until output is required. In its storage function it is particularly significant that the device requires no power to retain previously stored pulses.

Power interruptions or necessarily prolonged periods between input and output of pulsed commands or data thus do not impose limits on the storage function of the static magnetic memory for power is necessary only to pulse information in or out of the device.

One group is using these devices as a means of storing 16-digit decimal numbers. The number is determined by the presence or absence of a pulse. The static magnetic memory is involved in the relay circuit of a multiplier capable of obtaining a 46-digit product of two 23-digit factors. The equipment was constructed by the staff of the Computation Laboratory of Harvard University as an auxiliary to the IBM Automatic Sequence Controlled Calculator, usually known as the Mark I.

The single elements may also be assembled in such a manner that the two advancing windings are pulsed from the plates of tubes, thereby transferring the numbers in or out of a given register. A simplified schematic illustrating this arrangement is shown in Fig. 5. Any pentode type that will deliver 150 ma peak plate current will operate satisfactorily. At a lower repetition rate, however, more turns of wire may be added to each core and correspondingly smaller tubes may be used.

Systems of Different Pulse Rates

A second broad group of applications of the static magnetic memory involve its use as a transfer medium between systems of different pulse input and output speeds. This means that the device operates essentially as a speed transformer. Pulse input speeds of the order of 25 kc in some cases might be of little value if output could not be effected at a much slower speed, as for example, to operate mechanical printing devices or telegraphic instruments. This function combined with its storing ability allows the coupling of medium-frequency pulsing systems to devices of much lower operating speeds and vice versa.

A system employing magnetic tape (Fig. 6) illustrates the value of a linking medium between systems of different pulse rates. While recording on the tape a pulse rate of 10 kc, for example, may be very desirable, yet output to typewriters, solenoids or relays is impractical at this speed. However, this process can be made entirely feasible by means of a rapid input pulsed into the static magnetic memory and pulsed out at the desired slower speed.

Conversely the same is true: a relatively slow input from punched cards or some mechanical source may be read out of the static magnetic memory at a higher speed appropriate to magnetic recording on tape. Wherever it is desirable to use a relatively high input speed to the device while a different output rate suitable for a mechanical operation is required later, (or the reverse of these conditions), this device can find many valuable applications.

Use as a Counter

The static magnetic memory provides a means of accurately recording pulses at rates up to 25,000 per second. In this application the device employs no complex vacuum-tube circuits, requires power only for circulation and none for storage of pulses, and imposes no restrictions because of inherent fragility. The unit may be applied to counting operations ranging from those using rapid electronic pulsing mechanisms to those of lower speed machine operations.

To be used in this manner the static magnetic memory uses as its input a single information pulse.

The number of advancing pulses that have been applied to the device is determined from the core location of the input pulse. For example, by using three units of 10 cores each and placing one pulse in each unit, the pulse in the first ring of 10 will operate a second ring of 10, which in turn can operate any other familiar counting device. An arrangement of this sort is shown in Fig. 7, in which an input of 25,000 pulses per second fed into a series of three units of 10 cores each operates a mechanical counting device at a rate up to 25 pulses per second.

Use of the static magnetic memory for counting purposes allows a peak counting rate of 25,000 pulses per second, in its present form. Any configuration may be cycled continuously by the device, and at this speed its value to decade counters, monitoring operations, and pulse control application in general is apparent.

Changing Information

An additional application of this device lies in its ability to change the form of input or output pulses. In certain instances, because of the particular circuit conditions involved, it is highly desirable for operation to be in either serial or parallel form. For example, large-scale digital computers utilize input information in both a serial and parallel manner. Furthermore, some means is necessary whereby the parallel output of a computer can be shifted to the serial form required if the information is to be recorded on magnetic tape. Hence the value of the device is its capability of changing input or output pulses from one form to the other.

By connecting gating circuits to every other core that makes every pulse obtainable through the unit (Fig. 8A) information may be introduced and transmitted in either a serial or parallel manner.

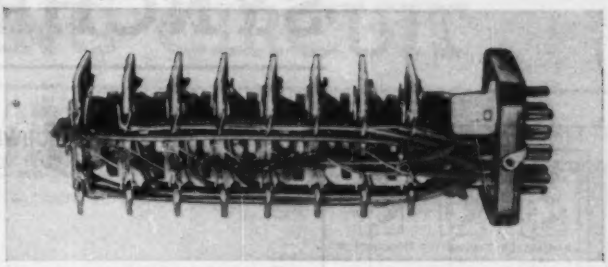

Complete eight-core unit mounted on a 20-pin plug-in base

A gating circuit for this purpose is shown in Fig. 8B. Since each core can have an output of approximately 10 volts, satisfactory operation of the circuit is accomplished by using a type 6AS6 tube. By the addition of special windings to the cores of the device, the output voltage can easily be increased to a magnitude of 30 volts. This is sufficient voltage to bias and fire a typical 2D21 thyratron in a reasonably short time, and leads to relay operation such as that used in the Harvard multiplier previously mentioned.

Production

A major problem in the manufacture of this device involved the development of special techniques and methods for handling, processing and controlling the expensive and fragile core material. For example, difficulty was encountered in maintaining proper curvature in Deltamax strips 0.001-inch thick, so that the essential hysteretic character of the material would remain unaltered. In addition, inherent fragility of the material necessitated painstaking handling. For these reasons an almost shadowless lighting bench was designed and built, at which specialized assemblers work in rotating short periods.



FIG. 8—Core connections for serial-parallel transformation, and delay-line output circuit for this purpose

Unit assembly is simplified and made rapid by the design of individual cores. A central tubular rivet in the individual unit allows them to be stacked about a central rod into lines of any feasible length, from a small 8-core unit up to 34 and 100 core banks. Adaptation to the particular circuit requirements thus has been anticipated, while ease of interconnection is provided by means of simple jumper connections between accessible solder terminals. The manufacturing design also incorporates the advantages of plug-in unit construction, by the addition of a 20-pin plug-in base.

The authors wish to acknowledge the valuable help and co-operation given by Howard Aiken, Director of the Harvard Computation Laboratory, Harvard University, Cambridge, Mass.



FIG. 7—Use of the magnetic memory device as a counter

BIBLIOGRAPHY

An Wang and Way Dong Woo, Static Magnetic Storage and Delay Line, *Jour. App. Phys.* **21**, 1, p 49, Jan. 1950.

An Wang, Magnetic Triggers, *Proc. IRE*, **38**, 6, June 1950.

The Computation Laboratory, Harvard University, Cambridge, Mass. Progress Reports 1-10, "Investigations for Design of Digital Calculating Machinery." (Contract W 19-122-AC-24 between Harvard Univ. and U.S.A.F.)

SYNCHRO DATA

By JEROME CORWIN and SAMUEL ADLER
Signal Corps Engineering Laboratory
Fort Monmouth, New Jersey

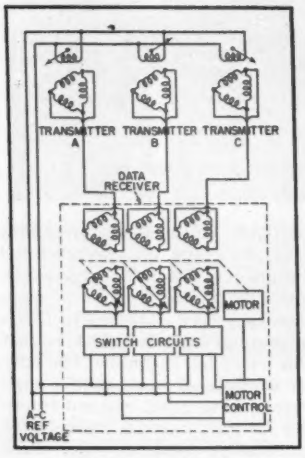

FIG. 1—Typical sampling layout for three synchro transmitters



FIG. 2—Ninety-degree displacement eliminates 180-degree ambiguity

ONE SERIOUS LIMITATION to the use of multi-synchro sampling systems for industry is the ambiguity introduced by the occurrence of null voltages at both zero and 180-degree displacements. The circuit described eliminates this 180-degree ambiguity factor, and enables a single receiving unit to sample the outputs of a number of synchro transmitters.

The receiving unit contains one synchro differential for each synchro transmitter. These synchro differentials are mechanically coupled to the shaft of a motor which rotates them from a fixed reference position in a predetermined direction and at a given speed. As each synchro differential comes within two degrees of the angular position of its corresponding synchro transmitter, to which it is coupled electrically, a single one-tube circuit operates a relay which causes the synchro data to be sampled at that point. The sampling process is repeated as each synchro differential reaches a position corresponding to its transmitter.

The circuit eliminates ambiguity by employing two synchro voltages whose amplitude envelopes are displaced 90 degrees. The amplitude of one of these voltages is used for switching when the angular difference is within two degrees of zero or 180 degrees (which is approximately equivalent to two volts in synchro voltage); the phase of the other voltage is used to differentiate between the zero and 180-degree positions by having its phase compared to that of a reference voltage. The reference voltage is the synchro excitation voltage.

Figure 1 illustrates the switching arrangements for sampling three synchro transmitters. The motor control can be any one of a number of devices which will start and stop the motor or cause the motor to slave the synchro transmitter if an additional synchro control transformer and a servoamplifier are available. The synchro transformer is coupled and indexed in the same manner as are the synchro differentials; however, only one transformer is required for each data receiver unit.

Synchro Voltages

In order to explain how the two synchro voltages are obtained, the transfer of synchro voltage data from one synchro transmitter to the switching circuit is described. Synchro excitation is supplied to the transmitter whose output windings send data to the synchro differential. The output of the differential is connected to a Scott-T type resistor network[1] which supplies the two desired synchro voltages whose amplitude envelopes are displaced 90 degrees. It should be noted that these voltages are identical in amplitude and form, and that they reverse 180 electrical degrees in phase at each null-voltage point. If a special resolver synchro were available having a delta-wound stator and a dual-wound rotor with coils spaced 90 degrees apart, the Scott-T network would not be necessary.

The two synchro voltages have

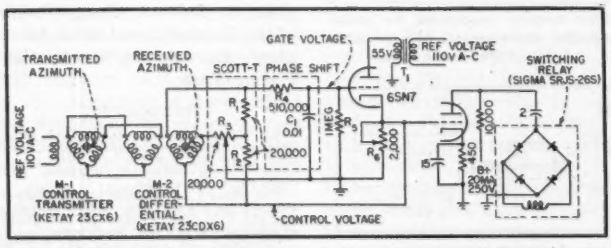

FIG. 3—Switching circuit serves a number of synchro combinations

SWITCHING CIRCUIT

One-tube circuit enables a single receiving unit to sample the outputs from a number of synchro transmitters automatically and without the ambiguity caused by the appearance of null voltages at both zero and 180-degree angular displacements

been designated as the gate voltage and control voltage and Fig. 2 illustrates the angular relationship between phase and amplitude for a revolution of the synchro transmitter with respect to its synchro differential. The choice as to which voltage is gate and which is control is completely arbitrary. It can be seen from these curves that at one null-voltage position of the control voltage, the gate voltage has maximum amplitude and is 180 electrical degrees out of phase with the reference voltage; while the other null-voltage position occurs when the gate again has maximum amplitude but is in phase with the reference voltage. Although the phase relationship illustrated is true theoretically, actually there is electrical phase shift of the excitation voltage caused by the synchros and the Scott-T network. A simple phase-shift network compensates for the shift and gives the desired phase relationship.

Switching Circuit

The switching circuit developed was designed around a single 6SN7 and a standard two-speed servo switching relay,[2] as shown in Fig. 3.

The first half of the tube is used to differentiate between the two null-voltage positions of the synchro transmitter. The gate voltage is fed to the grid, after the proper amount of electrical phase shift, and the reference voltage is fed to the plate through a 2-to-1 isolation transformer. When the gate voltage is in phase with the reference voltage the first half of the tube conducts, thus supplying bias to the grid of the second half of the tube by current flow through R_6. This grid bias is sufficient to keep the second half of the tube conducting over the major portion of the time during which the gate voltage is in phase with the reference voltage.

The control voltage is fed directly to the grid of the second half of the tube. Since only the amplitude of this voltage determines conduction, and since the gate voltage is available over a wide angle, no electrical phase shift is required on the control voltage. When the second half of the tube conducts, it energizes the relay which does the actual switching required for sampling. Switching occurs only when this relay is de-energized.

When the control voltage amplitude is less than two volts and the gate voltage is in phase with the reference voltage (this is equivalent to an angular difference of 180±2 degrees), the cathode circuit of the first half of the tube supplies sufficient grid bias to keep the second half of the tube conducting. This is shown in Fig. 2 as false zero. The relay remains energized and no switching occurs.

The control voltage is again below two volts at an angular difference close to true-zero degrees. Here the gate voltage is 180 electrical degrees out of phase with the reference voltage, thus the first half of the tube cannot conduct and no bias is supplied to the second half of the tube. Since the control voltage is below two volts and no grid bias is available, the second half of the tube is cut off and the relay is de-energized. Switching occurs at this point which is the true zero.

Components

The detail component design of the circuit is based on the use of the simplest types available in order to keep the size and number of components to a minimum while obtaining reliable operation. Component values and descriptions are indicated on the circuit diagram. Resistors R_1, R_2, and R_3 form the Scott-T resistor network for 90 degrees envelope shifting. Variable R_3 is adjusted for accurate 90-degree shift. Resistor R_4 and capacitor C_1 are used to make up for the electrical phase shift caused by the synchros and the Scott-T resistor network. A phase shift of approximately 45 degrees is required to bring the gate voltage in phase with the reference voltage.

Transformer T_1 is a standard 2-to-1 isolation transformer used to supply plate reference voltage to the first half of the 6SN7. Resistor R_6 sets the proper grid-bias voltage on the second half of the 6SN7 when the control voltage drops below two volts and the first half is conducting. The switching relay contains a full-wave dry disk rectifier and a d-c relay coil. A standard power supply capable of supplying 20 ma at 250 volts furnishes B+ voltages for each switching circuit.

Voltage and current measurements have indicated that all components are operated in their safe region. The switching circuit does not load the synchro data circuit, and the synchro wave shape has only a slight amount of distortion which will not affect the accuracy of the one-speed data used. The phase-shift network used to compensate for synchro electrical phase shift was satisfactory for the sampling method used; however, adjustment may be required if the transmission medium introduces a different amount of phase shift. The circuit is stable and not critical in adjustment or operation nor are any special components required.

REFERENCES

(1) Service Manual, TM 11-1524, War Department, 1946.
(2) I. A. Greenwood, Jr., J. V. Holdam, Jr., and Duncan MacRae, Jr., "Electronic Instruments," Chapter 12, Radiation Laboratory Series, McGraw-Hill Book Co., Inc., 1948.

IMPROVED VERTICAL

By ROBERT C. MOSES
Sylvania Electric Products Inc.
Flushing, New York

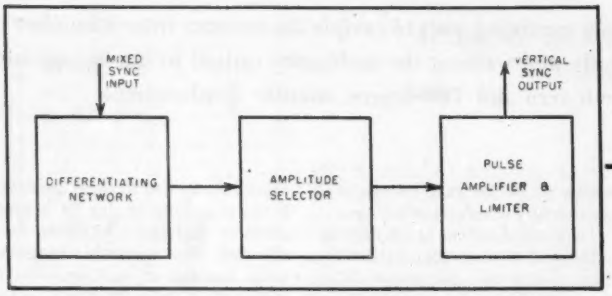

FIG. 1—Block diagram of system for producing steep-fronted pulses

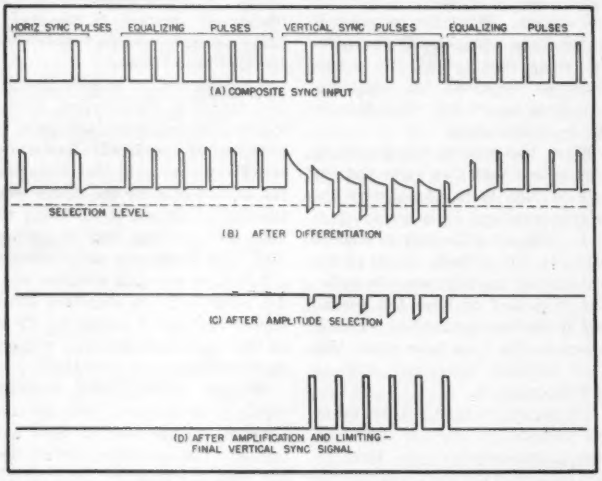

FIG. 2—Waveforms of composite sync input and changes produced by the system

Table I—Operating Characteristics

	Input Pulses	*Output Pulses*
Amplitude	40 v, peak	55 v, peak
Polarity	positive	positive
Rise time	0.8 μsec	0.9 μsec
Decay time	0.7 μsec	1.1 μsec
Pulse width	27 and 5 μsec	4.8 μsec
Pulse flatness	———	better than 2%
Keying frequency	60 cps	———
Repetition frequency	31,500 pps	31,500 pps
Number of pulses	———	6
Threshold level	———	17.5 peak sync input
Interference components on pulse baseline	———	1.5 v, p-p, approx

THE RELATIVELY POOR performance of vertical sync circuits is indicated by the difficulty often encountered in obtaining accurate and stable interlace free of drift, line pairing and the necessity for frequent and critical adjustment of television receivers.

With a few exceptions, present vertical sync circuits are essentially unchanged from those used in receivers of prewar vintage. Many of the shortcomings of these systems come about as a result of the method used for segregation of the vertical sync pulses from the composite sync signal. Almost without exception, this is performed by resistance-capacitance integration or equivalent means.

Integration with a resistance-capacitance network having a time constant suitable for complete elimination of the horizontal pulses produces a slowly rising serrated wavefront which reaches its maximum amplitude in approximately 190 microseconds. Because, with sync pulses of this shape, the triggering point of the vertical deflection oscillator is not positively determined with respect to time, stable and carefully controlled operating conditions of the latter are required if accurate interlacing is to be maintained.

Improved Rise Time

A material improvement in both vertical sync stability and interlace performance would result were the triggering pulses steep-fronted and of fairly large amplitude. Moreover, if a circuit responsive only to pulses of greater than a certain duration were placed between the sync clipper and the vertical deflection circuits, both horizontal pulses and short-duration noise pulses

SYNCHRONIZING SYSTEM

Positive interlace, freedom from line pairing and increased noise immunity without critical adjustments result from use of large-amplitude steep-fronted pulses for vertical synchronization. The pulses are derived from a simple circuit containing a germanium diode and a single triode

occurring during the field scanning interval would be rejected and the noise immunity of the entire system improved.

The circuit to be described performs the functions of pulse segregation, amplification, limiting, and sharpening, to yield a series of large-amplitude, steep-fronted pulses in rigidly controlled phase relationship to the transmitted vertical sync signal.

Theory of Operation

Figure 1 shows a block diagram of the improved sync system, while Fig. 2 indicates the significant waveforms drawn against a relative time scale.

Part A of Fig. 2 is a section of the standard sync signal at a time corresponding to the end of one interlaced field, and shows the last two horizontal sync pulses, twelve equalizing pulses and six vertical sync pulses. The approximate durations of these pulses are 5 μsec, 2.5 μsec and 27 μsec respectively.

The mixed line, equalizing, and field sync pulses are applied in positive polarity to a resistance-capacitance differentiating network having a carefully chosen time constant. The network passes with negligible attenuation the leading and trailing edges of all pulses. Charge storage in the capacitor during the pulse interval, however, introduces an appreciable droop in the flat top of each pulse, and causes the trailing edge to undershoot the pulse base line. It can be shown that the amplitude of the undershoot is a function of both the width of the applied pulse and the time constant of the network.

For a single-stage resistance-capacitance network, the amplitude of the undershoot may be expressed by:

$$E = V - \left[\frac{V}{\epsilon^{t/RC}}\right]$$

where E = amplitude of pulse undershoot, V = amplitude of applied pulse, t = width of applied pulse in μsec, RC = time constant of network in ohms-μf, and ϵ = 2.71828, the base of natural logarithms.

For a cascaded network containing n identical stages,

$$E = V - \left[\frac{V}{(\epsilon^{t/RC})^{\frac{n(n+1)}{2}}}\right]$$ to a close approximation

The equations relate the amplitude of the pulse undershoot to that of the applied pulse, and are strictly valid only where the network is driven from a zero-impedance generator, and is terminated by an infinite impedance.

In a practical case, the source and terminating impedances may vary over wide limits. Use of a cascaded multistage network reduces the effect of variations in the former by making the output waveform less dependent upon the characteristics of the generator.

The composite sync signal is passed through a two-stage resistance-capacitance network, each stage of which, neglecting the terminating impedances, has a time constant equal to the width of one vertical sync pulse or 27 μsec.

The effective constants of the network are then such that the undershoot amplitudes become

$E_o = (V - 0.136V) = 0.864V$ for the 27-μsec vertical pulses, and

$E_o = (V - 0.705V) = 0.295V$ for the 5-μsec horizontal pulses

where E_o is the amplitude of the undershoot developed across the final resistive element. For convenience in terminology, these undershoots may be called inverse pulses.

The ratio of amplitudes of the inverse vertical to inverse horizontal pulses is approximately 2.9 to 1. For equalizing pulses and noise pulses of duration shorter than 5 μsec, this amplitude ratio is increased.

Amplitude Selector

The output of the resistance-capacitance network consists of positive-going high-frequency components of the applied sync signal, together with the inverse vertical, inverse equalizing, and inverse horizontal pulses in the opposite polarity. This waveform, shown in Figure 2B, is applied to the cathode of a biased diode amplitude selector.

The cathode of the amplitude selector diode is maintained at a fixed positive potential with respect to its anode, and is nonconductive both for positive-going input signals and for negative signals of small amplitude. The positive cathode bias is adjusted to be somewhat greater than the peak amplitude of the inverse horizontal pulses. The latter, together with the inverse equalizing pulses and



FIG. 3—Complete circuit contains a crystal diode and triode tube

any short-duration noise pulses, are therefore rejected by the diode.

During the vertical sync pulse interval, the higher amplitude inverse vertical pulses developed by the network drive the diode into conduction. As shown in Fig. 2C, a series of six steep-fronted negative pulses occurring in time coincidence with the trailing edges of the applied vertical sync pulses appear at the anode of the amplitude selector diode. These have durations approximately equal to the width of the serrations in the vertical sync block, 4.7 μsec, and a recurrence rate of 31,500 pps, twice the line scanning frequency.

Pulse-Width Gate

From the above discussion, it is apparent that the combination of the R-C network and amplitude selector function as a pulse-width actuated gate, developing pulses at its output only when the input pulse duration exceeds a certain fixed value. Particularly effective pulse-width discrimination is obtained if the applied pulses are squared and amplitude stabilized, as is generally the case in a practical receiver application.

The negative-going inverse vertical pulses at the anode of the diode are applied to the input of a triode pulse amplifier, the operating conditions of which are such that pulse limiting and sharpening takes place. Because the grid is returned through a high resistance to the plate supply, it assumes a very slightly positive potential with respect to the grounded cathode. This assures conduction of the tube in the absence of signal.

With the grid slightly above ground, a very effective clamping action takes place at the input of the pulse amplifier. The grid is prevented from being driven more positive, thus assisting materially in rejecting any positive-going high-frequency sync pulse components which may leak through the amplitude selector. At the same time, the d-c axis of the pulse is restored and held rigidly near ground potential.

Since the peak amplitude of the inverse vertical pulses applied to the pulse amplifier is more than sufficient to drive the grid to cutoff, the final inverted output pulses at the plate are squared and sharply clipped at the same level. The tube therefore acts as a limiter in both positive and negative directions.

The pulse train of Fig. 2D becomes the final vertical synchronizing signal, the amplitude of which may be made as large as desired, and the rise time of which is limited only by the bandwidth of the preceding video amplifiers and sync auxiliaries of the receiver.

Circuit Details

Figure 3 shows the complete schematic diagram of the system. Capacitors C_1 and C_2, together with resistors R_1, R_2 and R_3 comprise the two-stage differentiating network. The values of these components are such that each stage of the network has the required 27-μsec time constant. Resistors R_4 and R_5 also serve as a voltage divider across the B supply, and maintain the cathode of the amplitude selector diode at a suitable positive potential.

The amplitude selector is a type 1N54 germanium diode. This type is characterized by high forward conductance together with unusually high resistance in the reverse direction, that is, with the cathode positive. Materially improved operation of the circuit is obtained with a germanium diode in this position, since the extremely low interelectrode capacitance of 1-$\mu\mu$f greatly reduces feed-through of undesired high-frequency components existing at the output of the differentiator. In addition, the increased conductance afforded by the germanium diode provides a substantially higher pulse amplitude across the relatively low grid-cathode impedance of the pulse amplifier. This improves the limiting action of the latter at low signal levels.

The circuit constants have been selected for a supply voltage of +135 volts, and an input pulse peak amplitude of 40 volts. Inasmuch as resistors R_6 and R_7 provide a positive bias of 15 volts at the cathode of the amplitude selector diode, the circuit as a whole has a threshold of operation somewhat above this level of input sync pulse. Since upward of 30 volts are generally available at the output of the final sync amplifier, this threshold lies considerably below the video level at which a picture having satisfactory contrast is obtained.

Triode V_1 operates as a pulse limiter and sharpener, with a voltage gain of slightly over five times. The relatively low plate load resistance, 5,600 ohms, affords adequate amplifier response to pulses having rise times as short as one microsecond.

Although a substantial improvement in pulse rise time could have been effected by inductive peaking in the plate circuit, this was not considered sufficiently advantage-

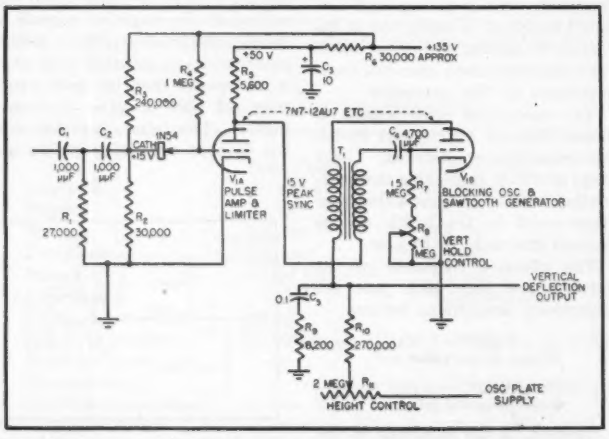

FIG. 4—Typical vertical blocking oscillator with addition of vertical sync pulse separator

A CINCH "*First*"...NOW AN ELECTRONICS *Standard*

There's so much more put into a Cinch Electronic Component that you get more out of it.

Grip Pin Type Socket



U. S. PATENT
No. 2,519,121

. . . with and without shield, Mtg centers: 1" and 1-5/16"; also available in grounded types or with 8 contacts and noval.

The Grip Pin type is the locking grip miniature socket. Precision tooled—contacts provide high extraction pull out . . . supplying maximum tube retentivity, mandatory in automotive set production. Available in any quantity.

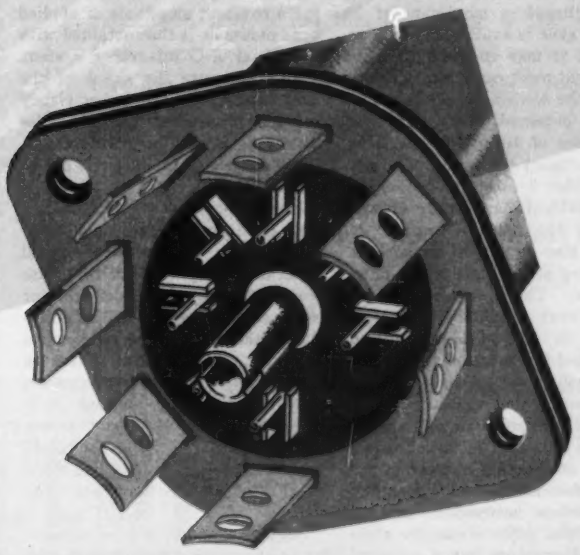

Available at leading electronic jobbers—*everywhere.*



CINCH MANUFACTURING CORPORATION

1026 South Homan Ave., Chicago 24, Illinois

Subsidiary of United-Carr Fastener Corporation, Cambridge, Mass.

ous to warrant the additional circuit complication.

Connection to Oscillator

Figure 4 is the schematic diagram of a typical vertical deflection circuit of the blocking-oscillator type, together with the vertical pulse separator system described. The preferred method of connection between the two is shown. The secondary of the blocking oscillator transformer T_1 is effectively a part of the plate load of V_{1b} and acts to further shape the sync pulses as well as to retain their sharp leading edges.

Because the plate resistance of V_1 in parallel with its load resistance represents an effective impedance of only a few thousand ohms in series with the a-c grid return of the oscillator, including the pulse amplifier as a portion of the oscillator circuit in no way affects normal operation of the latter. Injection of sync in this manner offers the further advantage of extreme simplicity.

Sync Amplitude

The peak amplitude of vertical sync pulse developed at the plate of V_1 depends upon the effective supply voltage at the junction of R_5 and R_6. Although a maximum of 55 volts of sync is available if R_6 were omitted, it may in some cases be found that more satisfactory operation of the blocking oscillator itself will be obtained with peak sync amplitudes of 10 or 15 volts.

The network consisting of C_3 and R_6 provides a means of adjusting the output pulse amplitude without affecting the pulse rise time; R_6 and C_3 also supply a measure of decoupling at the plate of the pulse amplifier. The time constant of this network should be long with respect to the field repetition period, and in general should be not less than 0.05 second.

With component values indicated in Fig. 4, the pulse amplifier operates at a quiescent plate voltage of 35 volts and a plate current of 2.9 ma. Under these conditions, the tube develops between 12 and 15 volts of sync pulse across the plate load, and requires but 4 volts of negative swing at the grid for complete limiting.

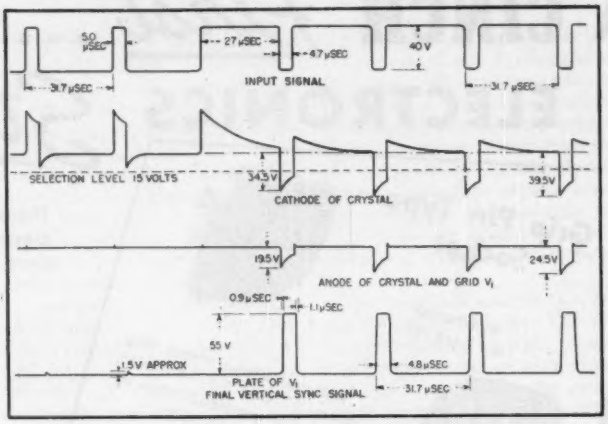

FIG. 5—Waveforms produced at designated points in the circuit

Pulse segregation with a system of this type has several additional advantages. Vertical synchronizing with pulses whose leading edges have a large time rate of change greatly minimizes interlace instability and eliminates the necessity for critical adjustment of the vertical oscillator frequency during and after warmup. The resulting accuracy of synchronizing is not nearly so dependent upon maintaining a constant amplitude of applied sync pulses as is that obtained with the usual R-C integrator system. This is because the shape of the final triggering pulse is completely independent of the input pulse amplitude over a very wide range. Rigid control of the latter is not so essential.

Integrator sync systems require that conditions before and after transmission of the broad-topped vertical sync pulses in the composite sync signal be identical for odd and even line fields. This necessitates the insertion of two groups of six equalizing pulses. Because the method of pulse segregation described does not depend upon integration, the equalizing pulses are unnecessary. This suggests that a degree of simplification could be effected in the composite sync signal.

An improvement in noise immunity in the vertical sync circuit may be realized, because short-duration noise pulses which occur during the field scanning interval will affect the circuit in exactly the same manner as normal horizontal sync pulses and will be rejected by the amplitude selector. Such noise rejection increases the vertical sync stability of the receiver under adverse noise conditions, and virtually eliminates frame splitting and picture roll.

Operating Data

The major electrical operating characteristics of the circuit are shown in Table I. Figure 5 shows scale waveform tracings taken at significant points throughout the system. These were obtained directly from a Tektronix model 511-A wide-band oscilloscope. To permit more accurate measurements, resistor R_6 of Fig. 4 was temporarily shorted out, allowing maximum amplitude of output pulse to be developed.

All data are taken with a simulated sync signal consisting of keyed 27-μsec and 5-μsec pulse trains. The pulse repetition frequency and keying frequency are 31,500 pps and 60 cps respectively.

Measurements were made with a plate supply voltage of 135 volts and the total current was 10.7 ma with R_6 removed.

The author acknowledges with thanks the valuable assistance of M. C. Pease of Sylvania Electric Products Inc. in the preparation of this paper.

Mallory Precision Production

pays off again in "shelf-life" demonstration

When you specify Mallory Capacitors for television receivers or other equipment where heat is a problem, you can be sure they will stand the test. Mallory FP Capacitors are designed to give long, trouble-free performance at 85°C. —naturally they give even longer service at normal temperatures. In addition, Mallory FP Capacitors are famous for their long shelf life. Write for your copy of the FP Capacitor Engineering Data Folder.

When a large radio and television manufacturer found it necessary to fall back on a supply of two-year-old capacitors, they found that every one of the Mallory Capacitors was ready for immediate use — without re-working of any kind. Because of the scrupulously careful manufacturing methods pioneered by Mallory, they were completely free of corrosion.

Mallory Capacitors have consistently set new high standards of dependability which far exceed normal specifications.

That's service beyond expectations!

P. R. MALLORY & CO. Inc.

MALLORY

P. R. MALLORY & CO., Inc., INDIANAPOLIS 6, INDIANA

SERVING INDUSTRY WITH

Electromechanical Products
Resistors *Switches*
TV Tuners *Vibrators*

Electrochemical Products
Capacitors *Rectifiers*
Mercury Dry Batteries

Metallurgical Products
Contacts *Special Metals*
Welding Materials

TUBES AT WORK

Including INDUSTRIAL CONTROL

Edited by VIN ZELUFF

Stereo Television for Remote Control 120
Operation of Electrodynamometer Instruments through Amplifiers 122
Wien Bridge as Frequency-Shift Servo 162
TV Receiving Antenna Measurements 164
Radioactivity in Textile Production 172
Precision V-R Tube Tester 174
Television Electronic Pointer 176
Batch Integrator 178
Novel Application for Neon Diodes 180
Shop Shortcuts 188

Stereo Television for Remote Control

BY H. R. JOHNSTON C. A. HERMANSON and H. L. HULL
Remote Control Engineering Division
Argonne National Laboratory
Chicago, Illinois

MANIPULATION of objects in three-dimensional space requires that depth perception be incorporated into any scheme used to view and control the means of manipulation. Ordinary two-dimensional television is not satisfactory for working with radioactive materials at a distance because the ability to judge depth is almost entirely lacking.

In the development of stereo television for the purpose a standard DuMont television pickup chain was employed. This equipment was modified so that two different lines of approach to the problem could be explored. One approach is the time-division method and the other the simultaneous method.

The time-division method used a mechanical rotating shutter and an optical system consisting of full and half-silvered mirrors. The left and right-eye images were sequentially projected onto the photo-cathode of the television camera tube. This system was abandoned because of image carryover and flicker.

In the simultaneous method finally adopted, the stereoscopic pair of images are transmitted simultaneously instead of sequentially. The two images are placed side by side in the same space normally occupied by a single image in standard two-dimensional television picture transmission.

Two variations of the simultaneous method have been tried. The first variation used a single lens and a beam splitter attachment at the camera. This scheme was dropped in favor of a two-lens arrangement illustrated herewith.



FIG. 1—Setup of the first version of the twin-lens system for the camera

The twin-lens system was found to be superior to the beam splitter because the optical quality of the individual images was greatly improved and the image overlap in the center was reduced. Figure 1 shows a diagrammatic sketch of the twin lenses and mirrors that were used.

In the first version of the twin-lens system, two 105-mm lenses were mounted three inches between centers. The lenses were arranged so that they would be slightly rotated about a vertical axis and be converged on a nearby object.

At the receiving end of the system, the two images appear side by side on the face of a standard picture tube. The right-eye view is on the left side and the left-eye view on the right side as the observer views the face of the receiving tube. See Fig. 2. This transposition of

Single-tube stereo-television viewer monitoring the pouring of a liquid by a mechanical master-slave manipulator

This article is based on a paper presented at the 1950 National Electronics Conference. The Conference paper will appear in the Proc. NEC.

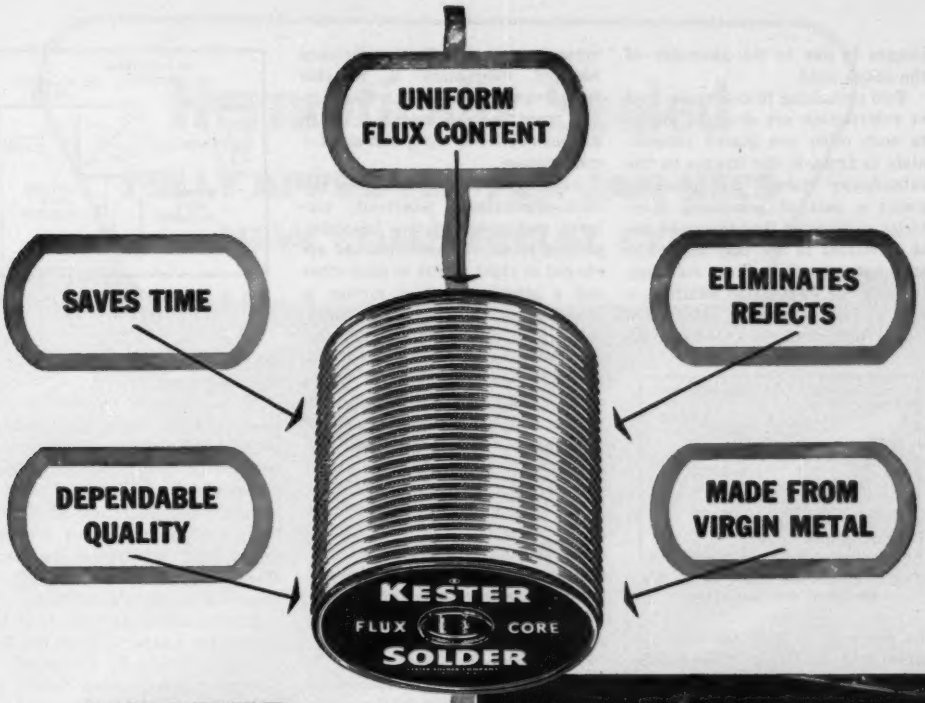

KESTER

the Solder

that gets Speed into TV Production

Using Kester Flux-Core Solders, Plastic-Rosin and "Resin-Five" Core Solders, will keep your solderers satisfied. Kester flows better—handles easier—faster to use. Kester Solders are made only from newly mined grade A tin and virgin lead.

FREE TECHNICAL MANUAL—Send for your copy of SOLDER and Soldering Technique.

KESTER SOLDER COMPANY • 4204 WRIGHTWOOD AVE.
CHICAGO 39, ILL. • NEWARK, N. J. • BRANTFORD, CANADA

Kester "Resin-Five" Core Solder and Plastic Rosin-Core Solder, which are available in the usual single-core type, can now also be had in a 3-core form.

KESTER SOLDER

images is due to the geometry of the optics used.

Two polarizing filters whose axes of polarization are at right angles to each other are placed immediately in front of the images on the cathode-ray tube. An observer wears a pair of polarizing spectacles so oriented that the right eye is permitted to see only the right eye image and the left eye sees only the left eye image. In addition, a pair of 10-degree glass prisms are placed in front of the eyes to enable



FIG. 2—Single-tube viewer for the first version of twin lens system

the observer to fuse the two pictures into a single three-dimensional image of the objects in front of the camera.

The use of glass prisms by the observer requires that his attention always be directed to the television screen since every other object in view appears double. Severe eye strain and mental discomfort result when the attention is directed to the hands in an attempt to operate switches or other devices.

A rotation of only 5 degrees of the observer's head about a horizontal axis perpendicular to the center of the viewing tube is sufficient to cause loss of stereo.

In the second twin-lens camera arrangement, the effective distance between viewpoints is variable from five to seven inches. The mirrors were made adjustable for both distance between viewpoint and for convergence.

Another method used to view the three-dimensional television pictures makes use of two television picture tubes. These tubes are arranged at right angles to each other and a semi-transparent mirror is placed at 45 degrees to both tubes. See Fig. 3. Crossed polarizing filters are placed in front of each picture tube and the observer wears crossed polarizing spectacles. Both images of the stereo pair appear on the tubes but by means of positioning controls and masks, the right-eye picture is placed in the center of one tube and the left-eye picture in the center of the other tube. The observer is enabled to see the three-dimensional image by observing one image by transmission through the semi-transparent mirror and the second image by reflection.

The twin-tube stereo-viewer is by far the more desirable because the observer is required to use only a pair of polarizing spectacles. The super-position of the two images is accomplished by the use of the half-silvered mirror and the positioning controls of the television viewers.

Since no prisms are used, the observer may look from the viewing screen to other objects in the room such as controls and switches without danger of severe eye strain as in the first method. Also this method permits considerable translation and rotation of the head of the observer before the stereo illusion is lost. Several persons may



FIG. 3—Two-tube viewer has no prisms and provides best picture

easily observe the stereo image at the same time.

A considerable amount of non-linearity in the sweep circuits could be tolerated without serious impairment of the stereo-illusion. Slight differences in the sizes of the two images could be reconciled by the brain with some fatigue involved. In was found however, that appreciable vertical displacement of the images could not be tolerated.

Approximately 60 percent of the light of the image is lost in the first polarizing filters; 60 percent of the remaining light is then lost in the half-silvered mirror and another 10 percent of the light is lost in the polarizing spectacles. This results in a loss of approximately 85 percent of the total light available.

The picture tubes are 12½ inches in diameter and have aluminum-backed screens. To obtain the required increased brilliance, an accelerating voltage of 12,000 volts is applied. A well-regulated high-voltage supply is essential in the twin-tube viewer so that the size of the image does not change when brightness and contrast controls are adjusted.

Operation of Electrodynamometer Instruments Through Amplifiers

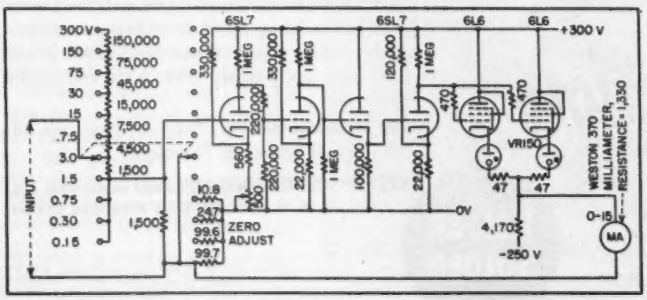

Circuit of direct-coupled power amplifier for operation of an electrodynamometer

By W. G. Hoover

Associate Professor
Department of Electrical Engineering
Stanford University
Stanford, California

Use of direct-coupled vacuum-tube amplifiers to drive electrodynamometer instruments is worth considering from the standpoint of sensitivity. Under proper conditions, amplifiers stabilized with large amounts of negative feedback can provide the required power with

(Continued on p 159)

Hermetically Sealed

FULLY APPROVED FOR JAN USES
...NEW COMMERCIAL TYPES

SPRAGUE KOOLOHM®

POWER AND PRECISION RESISTORS

The only complete line of hermetically sealed wire wound resistors on the market today, Sprague Ferrule Terminal Koolohms offer types, sizes, and resistance values for every power or precision resistor need. Operating voltages range from milli-volts to kilovolts; resistance values from 0.5 ohms to 1,000 megohms. Fully protected by Sprague glass-to-metal seals, these ferrule terminal Koolohms will withstand the most severe salt water immersion and temperature shock tests. These standard Sprague resistor types meet all applicable JAN Specifications. Similar types with even higher power ratings are available for commercial applications where severe thermal shock is not a factor. *For complete description and rating data, write for Catalog No. 100E.*

SPRAGUE ELECTRIC COMPANY • North Adams, Mass.

WOUND WITH CERAMIC INSULATED WIRE

KOOLOHM layer winding turns cannot "swim" or short. Insulation has a dielectric strength of 350 volts per mil, at 400°C.



KOOLOHM interleaved winding—Resistors are available having negligible inductance, even at VHF.

Section of KOOLOHM wire with ceramic insulation removed to show contrast between bare and insulated wire. This flexible, heat-proof insulation is actually applied to the wire at a temperature of 1000°C.

THE ELECTRON ART

Edited by JAMES D. FAHNESTOCK

High-Definition Black-and-White Television System 124
Sb-Cs, Ag-Cs_2O-Cs Phototube Characteristics 126
A Novel Pressure-Measuring Method 190
Resistance-Coupled Amplifier Bandwidth 192
New Accuracy in Speed-of-Light Measurements 200
Ratio and Product Control by Shield-Grid Thyratrons 202

High-Definition Black-and-White Television System

A NEW high-definition system for black-and-white television has been suggested by R. B. Dome of the General Electric Company. Present monochrome receivers may receive high-definition transmissions with definition equal to that obtainable with present standards, but the addition of four tubes to the circuit will provide upward of 50 percent increase in horizontal detail. All precision equipment is located at the transmitter. The resultant picture is free from dot structure, since no sampling is employed.

The new system is based on the fact that the eye is not as susceptible to flicker in small areas as it is to flicker in large areas. The normal video band is divided into two approximately equal portions. The low-frequency portion is transmitted in regular 60-cps sequence, as in present-day monochrome transmissions, but the upper section of the video band is used only on *odd* fields for the transmission of picture detail normally transmitted by present transmitters on both odd and even fields. The superhigh video band of frequencies added by the new system is transposed in frequency to fit the upper section which can be radiated and is transmitted on *even* fields. This represents an increase in horizontal resolution from the present 350 lines to 525 lines.

The block diagram of Fig. 1 shows the transmitter for generating the required signal. The camera output passes through three filters which divide the 0 to 5.3-mc signal into three sections, 0 to 1.6, 1.0 to 3.8 and 3.44 to 5.3 mc. The low portion is continuously amplified. The middle-band amplifier is keyed on alternate fields and its output is connected in parallel with the output of the low-frequency amplifier. The high range, carrying the superfine detail, is fed to a suitable mixer-transposer to which is also fed a continuous wave of 15,750 cycles. The difference frequency of these signals is selected by a filter that passes 1.6 to 3.44 mc—the 1.6-mc comes from the 5.3-mc end,

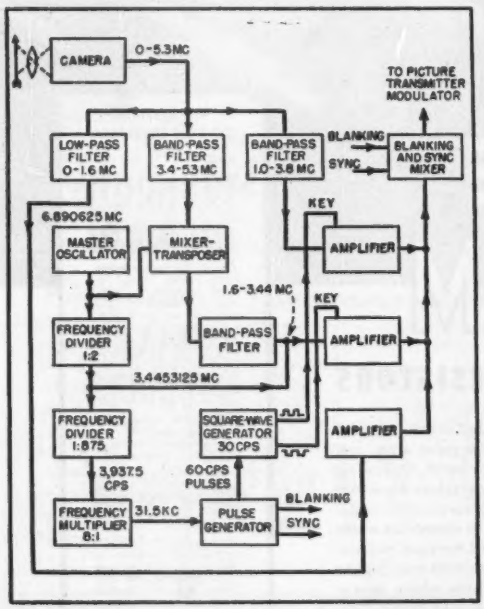

FIG. 1—Block diagram of circuits that are added to transmitter to utilize Dome system of high-definition black-and-white television

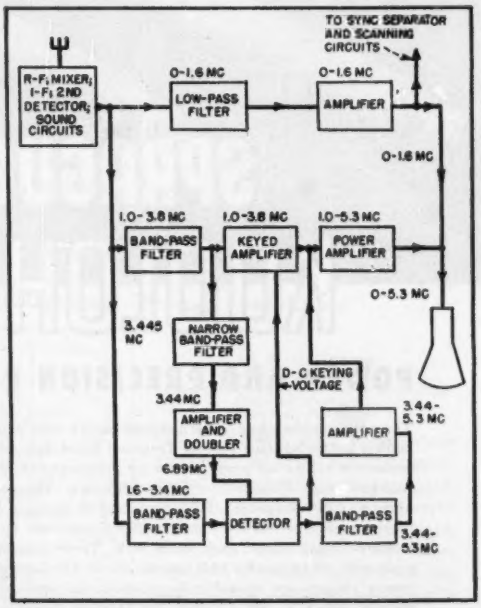

FIG. 2—Normal pictures are received by conventional receiver. Addition of four tubes increases horizontal detail by 50 percent

Laboratory Instruments for TELEVISION

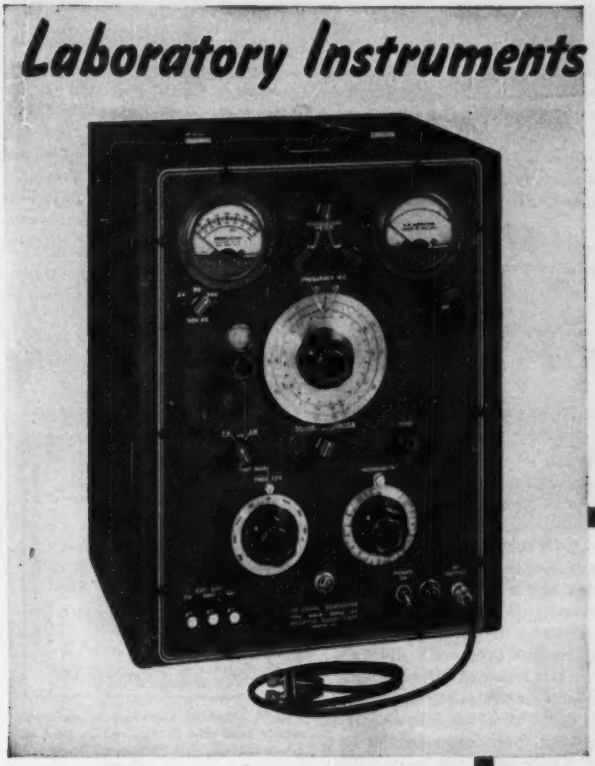

Type 202-B
FM SIGNAL GENERATOR

Frequency Range
54-216 mc.

Additional coverage from 0.4 to 25 mc. with accessory UNIVERTER Type 203-B

FM SIGNAL GENERATOR
Type 202-B

The Type 202-B FM Signal Generator is specifically designed to meet the exacting requirements of television and FM engineers working in the frequency range of 54 megacycles to 216 megacycles. Following are some of the outstanding features of this versatile instrument:

RF RANGES: 54-108, 108-216 mc. ± 0.5% accuracy. Also covers 0.4 mc. to 25 mc. with accessory 203-B Univerter.
VERNIER DIAL: 24:1 gear ratio with main frequency dial.
FREQUENCY DEVIATION RANGES: 0-24 kc., 0-80 kc., 0-240 kc.
AMPLITUDE MODULATION: Continuously variable 0-50%, calibrated at 30% and 50% points.
MODULATING OSCILLATOR: Eight internal modulating frequencies from 50 cycles to 15 kc. available for FM, AM.
RF OUTPUT VOLTAGE: 0.2 volt to 0.1 microvolt. Output impedance 26.5 ohms.
FM DISTORTION: Less than 2% at 75 kc. deviation.
SPURIOUS RF OUTPUT: All spurious RF voltages 30 db or more below fundamental.

If you have an FM or television instrument requirement, let us acquaint you with full particulars and technical data concerning the Type 202-B FM Signal Generator and Type 203-B Univerter.

UNIVERTER
Type 203-B

AVAILABLE AS AN ACCESSORY is the 203-B Univerter, a unity gain frequency converter which, in combination with the 202-B instrument, provides the additional coverage of commonly used intermediate and radio frequencies.

R. F. RANGE: 0.4 mc. to 25 mc. (0.1 mc. to 23 mc. with no carrier deviation).
R. F. INCREMENT DIAL: ± 250 kc. in 10 kc. increments.
R. F. OUTPUT: 0.1 microvolt to 0.1 volt, ± 1 db. Also approximately 2 volts maximum (uncalibrated).
OUTPUT IMPEDANCE: Approximately 60 ohms at 0.1 volt jack, 470 ohms at 2 volt pin jack.

BOONTON RADIO *Corporation*
BOONTON, N. J., U.S.A.

DESIGNERS AND MANUFACTURERS OF THE Q METER · QX CHECKER FREQUENCY MODULATED SIGNAL GENERATOR · BEAT FREQUENCY GENERATOR AND OTHER DIRECT READING INSTRUMENTS

while the 3.44 beat is derived from the 3.44 end beating with the 15,750 carrier. Thus inversion, as well as transposition of the superhighs has been accomplished.

At the output of the filter, a 3.4453125-mc wave is added for use at the receiver in retransposing. The 1.6 to 3.44-mc band is amplified by a third amplifier and combined by addition with the 0 to 1.6 and 1 to 3.8-mc bands. The 1.6 to 3.44-mc band is keyed on during alternate fields when the 1 to 3.8-mc amplifier is turned off. The combined signal is combined in a blanking and sync mixer to form a composite television signal which is then fed to the modulator of the conventional television transmitter.

The transmitted pulse generator chain includes a master oscillator at 6.890625 mc from which is derived the 3.4453125-mc signal and sync for a standard transmitter pulse generator. Transition keying is made during the vertical blanking period.

Receiver Circuit

The only receiver change appears in the video amplifier. A typical circuit block diagram is shown in Fig. 2. The video detector output is fed through three filters. The first passes the 0 to 1.6-mc band which is common to both odd and even fields. A second filter passes frequencies from 1 to 3.8 mc. These frequencies are keyed by an amplifier and combined with the low frequencies to feed the picture-tube gun.

A side circuit, connected at the output of the 1 to 3.8-mc filter, is tuned to the transposing frequency of 3.445 mc. This signal is amplified, doubled to 6.890625, and fed to a detector-modulator. The d-c output from this detector is fed to the keyed amplifier so that when 3.445 is present, the keyed amplifier is keyed off.

The third filter connected to the video detector passes 1.6 to 3.4 mc and this band is fed into the 6.89-mc detector-modulator. The output of this detector contains a difference band of 3.44 to 5.3 mc. This band is passed by a filter which rejects the 1.6 to 3.4-mc band and the 6.89-mc carrier and any traces of the 3.445-mc carrier which may have passed the other filters. The output of the 3.44 to 5.3-mc filter is amplified by a video amplifier and applied in parallel to the 1 to 3.8-mc amplifier output.

The extra functions may be accomplished by the addition of four tubes, a 6AS6, 12AX7, 12AU7 and 6SF7.

The high-definition signal can be transmitted over any 4-mc channel. When used with a 2.7-mc channel, no improvement is possible under the system described, but it is possible to add some terminal equipment to transmit an apparent 3.84-mc signal over a 2.7-mc channel through the use of the system.

Tests have proved the feasibility of subdividing the video-frequency spectrum in the manner herein described.

Sb-Cs, Ag-Cs_2O-Cs Phototube Characteristics

SEVERAL MONTHS AGO, (August, 1950, p 132), there appeared in *Backtalk* a letter from a reader in Eastern Europe suggesting a design for a phototube containing a semitransparent Sb-Cs and a Ag-Cs_2O-Cs surface. Two engineers of the Rauland Corporation, S. Pakswer and W. O. Reed, undertook the investigation of the idea and built a model of the tube as suggested in the proposer's diagram which accompanied his letter. Their findings are presented in the curves and text which follows. We quote from their letter to the inventor whose name has been withheld at his own request.

"In the August issue of ELECTRONICS you published a letter concerning a phototube which contained a semitransparent Sb-Cs and a Ag-Cs_2O-Cs surface. We processed a tube constructed according to the drawing on page 132 (again reproduced in Fig. 1), and made measurements on it, some of which are presented in the enclosed graphs.

"In Fig. 2 are shown the current readings in the common anode lead and in the Ag-Cs_2O-Cs lead, the anode being held at + 300 volts



FIG. 1—Two-cathode phototube suggested by Eastern European reader in Backtalk letter


CURRENT IN Ag-Cs2O-Cs LEAD
CURRENT IN ANODE LEAD
CURRENT IN μA IN ANODE LEAD
TOWARD CATHODE
FROM CATHODE
CURRENT IN μA IN Ag-Cs2O-Cs CATHODE LEAD
VOLTS ON Ag-Cs2O-Cs ELECTRODE

FIG. 2—Current readings in common anode lead and in Ag-Cs_2O-Cs lead of proposed combination phototube

and a variable positive potential being supplied to the second cathode. With both cathodes at the same potential the anode lead registers the combined photoemissive currents. Raising the potential at the second cathode, this cathode starts collecting some photoelectrons from the Sb-Cs surface; at still higher positive potentials the Ag-Cs_2O-Cs surface starts emitting secondary electrons and the current reverses itself. This consideration is substantiated by comparison of curves *B* and *C* in Fig. 3, which are drawn to the same scale (the other two curves being shown on other scales). Curve *B* had been taken with both cathodes at the same potential, curve *C* at a condition shown by the arrow in Fig. 2. It can be seen that the maximum in the blue green is less pronounced in curve *C*, corresponding to some loss of photoelectrons from the Sb-Cs surface.

"Curve *D* in Fig. 3 represents the response of the Sb-Cs surface alone

(Continued on page 190)

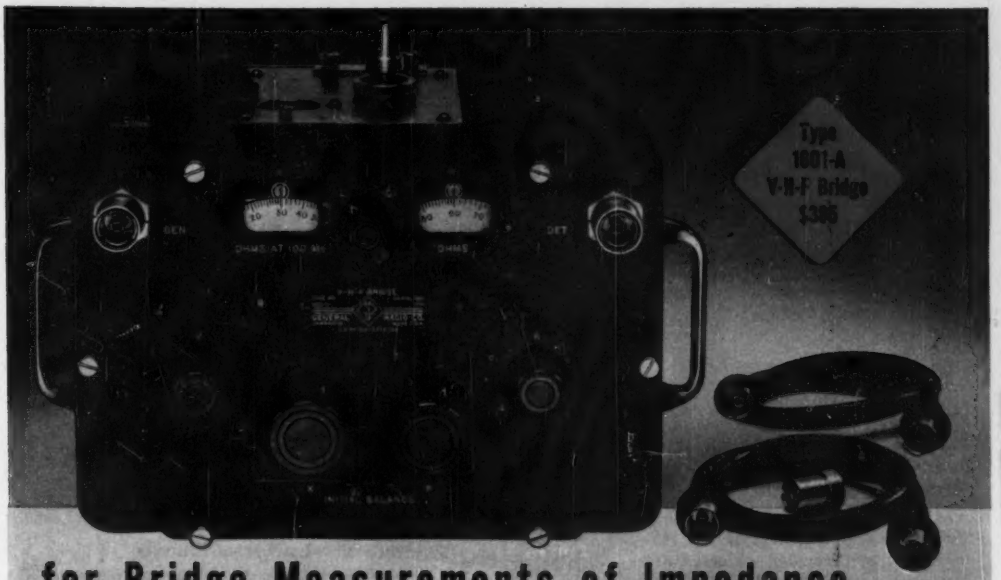

for Bridge Measurements of Impedance

BETWEEN 10 AND 165 Mc

Direct-Reading Resistance Range 0 to 200 OHMS— *independent of frequency except for small corrections.*

Direct-Reading Reactance Range 0 to ±230 OHMS at 100 Mc — *inversely proportional to frequency.*

Coaxial Adapter Supplied for Measurements on Coaxial Systems — *eliminates errors from connecting leads and from residual terminal capacitance. Standing-wave ratio of unknown coaxial system unaffected by terminal capacitance of bridge.*

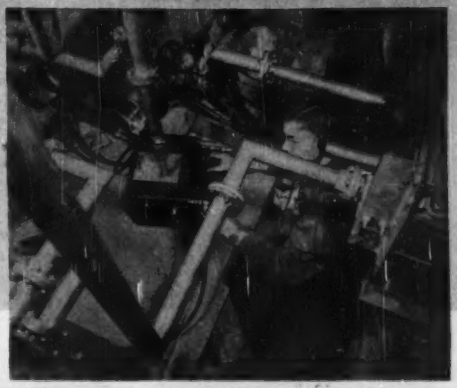

The Type 1601-A V-F-H Bridge set up to measure the antenna of WCBS-TV on the Chrysler Building, New York City. The antenna consists of 16 radiating elements. Measurements of the impedance variation of an individual element over the operating frequency band as well as impedance measurements of the whole array were made easily and accurately.

THE new Type 1601-A V-H-F Bridge brings to the v-h-f frequencies a means for measurements of impedance of antennas, lines, networks and components, having the same accuracy and simplicity of measurement enjoyed by users of the popular G-R low-frequency Type 916-A R-F Bridge.

With this bridge the range of conventional bridge techniques is extended to 165 Mc. It is equally suited to measurements on coaxial-line systems as on lumped parameter circuits.

It is designed for direct-reading measurements of relatively low impedances, but measures high impedances indirectly and equally well.

For resistance measurements the accuracy is ±(2% + 1 Ω), subject to correction for inductance in the capacitor used to measure the resistance. A correction chart is supplied with the instrument. The ohmic portion of the accuracy statement varies between 0.1 and 1.0 ohm.

For reactance measurements the accuracy is ±(5% + 2 Ω). The ohmic uncertainty varies between 0.1 ohm at 100 Mc and 2 ohms.

This bridge is especially suited to measurements of resistors, capacitors, inductors, transmission-line networks and antennas.

GENERAL RADIO COMPANY Cambridge 39, Massachusetts

90 West St., New York 6 920 S. Michigan Ave., Chicago 5 1000 N. Seward St., Los Angeles 38

NEW PRODUCTS

Edited by WILLIAM P. O'BRIEN

Industrial Lab Equipment Highlights New Devices . . . Wide Selection of Miniature and Weatherproof Components Will Aid Armed Forces Needs . . . Forty-Three Catalogs and Bulletins Are Offered for Engineers Mobilizing for Greater Production.

Multicoupler Amplifier

PLESSEY INTERNATIONAL LTD., Ilford, Essex, England. Type PV.14 antenna multicoupler wide-band amplifier permits the operation of up to 10 communication receivers within the 2 to 20-mc range from one common antenna system without loss of strength of individual signals or cross-modulation effects. It consists of an amplifier preceded by a high-pass filter attenuating incoming signals below 2 mc, which feeds ten cathode follower stages designed to work into 75-ohm unbalanced loads.

Oscillograph-Record Camera

ALLEN B. DU MONT LABORATORIES, INC., 1000 Main Ave., Clifton, N. J. A new oscillograph-record camera provides, in one minute, a complete record of an oscillograph image. No darkroom facilities are required and waveform comparison is immediate. Designed specifically for application with any standard 5-in. c-r oscillograph, the camera employs the Polaroid-Land process for delivering a finished print at the termination of each completed exposure or set of exposures. Lens aperture is f:2.8. Size of print is $2\frac{1}{4} \times 3\frac{1}{4}$ in.



Signal Generator

AIRCRAFT RADIO CORP., Boonton, N. J. Type H-14 signal generator was designed for complete testing of vhf airborne omnirange and localizer receivers in aircraft or on the bench. The unit has a frequency range of 108 to 118 mc. Its r-f output for ramp checks is 1 volt into a 52-ohm line and for bench checks, 0 to 10,000 μv. Also available is an a-f output for bench maintenance and trouble shooting. Price is $885.



Time Delay Generator

THE RUTHERFORD ELECTRONICS CO., 3724½ So. Robertson Blvd., Culver City, Calif. Model A2 time delay generator will produce variable time delays ranging from 0.4 μsec to 100,000 μsec. Five delay ranges are provided, giving a full scale reading of 10 μsec on the lowest range and progressing by decade steps to the highest range. The blocking oscillator output pulse is 0.5 μsec wide. The multivibrator output pulse width is designed to permit easy viewing on a synchroscope and is a function of the delay range in use.



Universal Chassis

AVION INSTRUMENT CORP., 121 E. 24th St., New York 10, N. Y., has designed a universal electronic chassis for use in servomechanisms, pulse and flip-flop circuits, analog computers and similar devices. Up to eight subminiature tubes can be mounted and wired. The complete assembly mounts in a metal case filled with a special potting compound which provides mechanical support for the components, ample heat dissipation and protection from tropical or arctic conditions. The chassis is designed to operate in temperatures ranging from −50 C to +80 C. It meets specification An-E-19 with respect to condition of altitude, humidity and vibration.



Insulating Devices

TEFLON PRODUCTS DIVISION, UNITED STATES GASKET CO., P.O. Box 93,

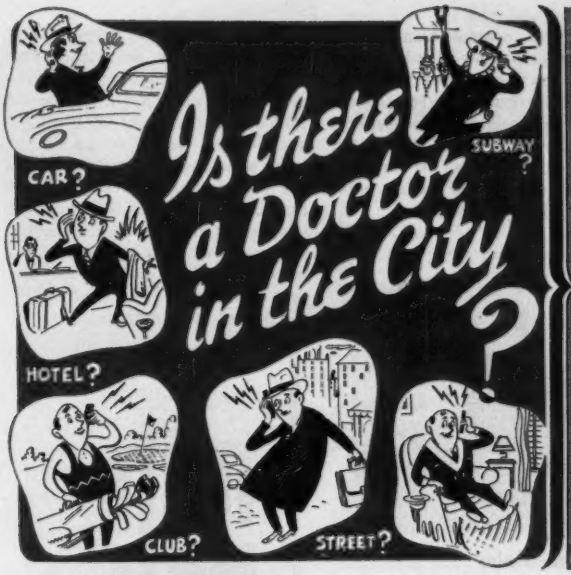

TELANSERPHONE'S "AIRCALL" FINDS HIM QUICKLY, SURELY, DEPENDABLY THANKS TO THESE

RAYTHEON

SUBMINIATURE TUBES

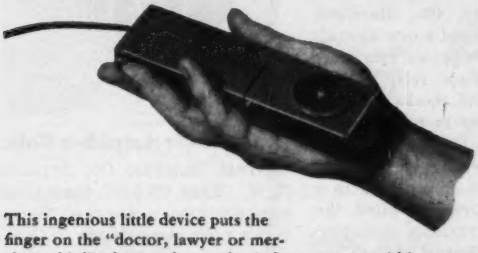

This ingenious little device puts the finger on the "doctor, lawyer or merchant chief" wherever he may be, indoors or out, within a twenty-five mile radius. He simply presses the button, holds the "Aircall" to his ear for a moment while it gives off broadcast call numbers, headed and terminated by call letters in a different voice. If his number comes up he simply calls the Telanserphone office from the nearest phone and is given the message. In this way he is never missing—never out of touch with his office, hospital, home or what not. Will electronic wonders never cease!

Raytheon Subminiature Tubes

have exactly what it takes for applications such as this. They're rugged, long lasting, generally more dependable and efficient than their large tube counterparts.

Raytheon Subminiatures fit standard sockets or can be soldered or welded into the circuit.

Raytheon Subminiatures are standard the world over — *more in use than all other makes combined.*



This chart gives you at a glance the characteristics of representative Raytheon Subminiature Tubes

Type No.	Remarks	Maximum Diameter Inches	Maximum Length Inches	Filament Or Heater Volts	Filament Or Heater Amps.	Mutual Conductance μmhos	Power Output MW	TYPICAL OPERATING CONDITIONS Plate Volts	Plate Ma.	Screen Volts	Screen Ma.	Grid Volts
HEATER CATHODE TYPES												
CK5703/CK605CX	Characteristics of 6AK5	0.400	1.5	6.3	200	5000		120	7.5	120	2.5	Ek=-200
CK5703/CK605CX	Triode, UHF Oscillator, ¼ watts at 500 Mc	0.400	1.5	6.3	200	5500		120	9.0			Ek=-220
CK5704/CK6008X	Diode, equivalent to one-half 6AL5	0.315	1.5	6.3	150			150ac	9.0			
CK5744/CK619CX	Triode, High mu.	0.400	1.5	6.3	200	4000		250	4.0			Ek=-200
CK5784	Characteristics of 6AS6	0.400	1.5	6.3	200	3300		120	5.2	120	2.5	-2.0
CK5839	Similar to 6AL5	0.300x0.400	1.5	6.3	150			117ac	5.0 per section			
PLANAR TYPES												
1AD4	Shielded RF Pentode — high Gm	0.300x0.400	1.5	1.25	100	5000		45.0	3.0	45.0	0.8	0
CK571AX	10 ma. Filament electrometer tube, Ig = 2x10^{-14} amps.	0.285x0.400	1.5	1.25	10	1.61		10.5	0.30			-0.9
CK573AX	Triode, high frequency output	0.300x0.400	1.5	1.25	200	3000		90.0	11.0			-4.0
CK574AX	Shielded Pentode RF Amplifier	0.290x0.390	1.25	0.625	20	371		22.5	0.125	22.5	0.04	-0.625
CK5672	Output Pentode	0.285x0.365	1.5	1.25	90	625	60.0	67.5	2.75	67.5	1.1	-6.25
CK5676/CK5766AX	Triode, UHF Oscillator for radio use	0.300x0.400	1.5	1.25	120	1600		135.0	4.0			-5.0
CK5677/CK5668AX	Triode, UHF Oscillator for radio use	0.300x0.400	1.5	1.25	60	650		135.0	1.9			-6.0
CK5678/CK569AX	RF Pentode	0.300x0.400	1.5	1.25	20	1100		67.5	1.8	67.5	0.45	0
CK5697/CK570AX	Electrometer Triode Max. grid current 5x10^{-14} amps.	0.285x0.400	1.25	0.625	20	1.61		12	0.22			-2.0
CK5785	High voltage rectifier	0.285x0.400	1.5	1.25	12				0.1	Inverse peak 2500 volts		
VOLTAGE REGULATORS												
CK5783	Voltage reference tube—like 5651	0.400	1.02	Operating voltage 85. Operating current range 1.5 to 5.5 ma.								
CK5787	Voltage regulator	0.400	3.06	Operating voltage 150. Operating current range 5 to 25 ma.								

CK ● BK ● Voltage Gain Ratio.

RAYTHEON

RAYTHEON MANUFACTURING COMPANY

Camden, N. J., is now fabricating all types of Teflon insulators (spacers for coax cables, inserts for coax connectors, beads, and so on) for high-voltage, high-temperature, high or ultrahigh-frequency service in tv transmitters, radio, radar and other electrical equipment. These tetrafluoroethylene resin insulators have a power factor less than 0.0005, and a dielectric constant of 2.0 over the frequency range measured to date. Teflon is serviceable throughout a temperature range of from below −90 F to +500 F.



Magnetron

RADIO CORP. OF AMERICA, Harrison, N. J. Model 2J50 magnetron is of the internal-resonant circuit type intended for pulsed oscillator service, such as radar, at a fixed frequency of 8,825 mc. It has a maximum peak power input rating of 260 kw. When operated with a peak anode voltage of 12,000 volts, the 2J50 is capable of giving a peak power output of 45 kw at a duty factor of 0.001.

Coax Line Terminations

NEW LONDON INSTRUMENT CO., P.O. Box 189, New London, Conn. Illustrated above are 50-ohm terminations for coaxial transmission lines featuring low standing-wave ratios from d-c to over 3,000 mc. Fittings are type N, especially designed for minimum reflections. The units are useful for testing cables, slotted lines, r-f bridges, sweep generators and random noise sources. Price is $11.30.



Miniature Relay

THE HART MFG. CO., Hartford, Conn., has developed a new aircraft type, hermetically sealed, miniature 4-pole double-throw relay. It is built to withstand shocks up to 50 G and to operate in temperatures ranging from −65 C to +200 C. Displacing only 1.5 cu. in. and weighing but 3.5 oz sealed with a dry, inert gas, pressure filled, the new relay has variable mounting arrangements. Contact ratings are 2 amperes, 28 volts, d-c; 2 amperes, 115 volts, a-c, 400 cycles. Overload rating is 12 amperes, 28 volts, 20 seconds.

ULF Rejection Filter

KROHN-HITE INSTRUMENT CO., 580 Massachusetts Ave., Cambridge, Mass., announces model 350-A variable ultra-low frequency rejection filter that provides either a rejection band in which the gain falls at a rate of 24 db per octave or a sharp single frequency null. High and low cutoff frequencies of the rejection band are independently and continuously adjustable over the frequency range from 0.02 to 2,000 cps. A sharp null may be obtained at any frequency between 0.1 and 500 cps. Gain is within 3 db of unity at one octave above or below the null frequency. The unit is especially useful for vibration studies and electromedical research, for geophysical and seismological instrumentation, and in conjunction with any 1-f phenomenon involving selective amplification.



Beam-Power Amplifier Tube

GENERAL ELECTRIC CO., Syracuse, N. Y. Type 6W6-GT beam-power amplifier tube is designed for use in the audio output stage of tv and radio receivers. Maximum ratings of the tube include: peak positive pulse plate voltage, 1,000 volts; peak negative pulse grid No. 1 voltage, 200 volts; plate dissipation, 10 watts. Heater voltage, a-c or d-c, is 6.3 volts; heater current, 1.2 amperes.



Voltage-Regulated Power Supply

KEPCO LABORATORIES, INC., 149-14 41st Ave., Flushing, N. Y. Model 131 power supply features a high-

(Continued on p 212)

Here's What These

audio "Firsts"

Have Done for You

. . . to lower the cost and improve the quality of magnetic recording tape

First **with liberal discounts to professional users**

—enabling radio stations, recording studios and educational institutions to save as much as 33⅓% on the cost of magnetic tape.

First **with attractive resale discounts**

—and a nation-wide network of helpful, cooperative sound-equipment distributors in principal cities from coast to coast.

First **with red oxide tape on paper base**

—offering recordists a high-quality tape designed to match the characteristics of the vast majority of recorders, at *lowest possible cost.*

First **with supercalendered kraft paper base**

—providing maximum smoothness of texture and minimum noise, without the use of fillers which tend to come out or stiffen the paper.

First **with all-aluminum 7-inch reels**

—mechanically strong, light in weight, and permanently free from warping or twisting even under adverse conditions.

First **to give extra footage on standard size reels**

Audio's "full measure" of 1250 ft., 2500 ft., and 5000 ft. give *4% more tape* on every reel.

First **with black oxide tape on plastic base**

—offering highest fidelity of recording and reproduction for machines designed to use a high coercive-force oxide.

First **to offer paper base tape in 2500 and 5000 foot rolls**

—permitting maximum economy for professional applications where premium quality recordings are not required.



First **to produce a constant output tape**

—made possible by Audio's specially designed coating machinery which controls coating thickness to within 5 *millionths* of an inch.

First **to guarantee output uniformity of**

± ¼ db for 2500 ft. reel

± ½ db from reel to reel in 2500 ft. size

First **to produce a splice-free 2500 ft. roll**

—to *guarantee* that the tape is all one piece, with absolutely no splices in the entire length.

First **to develop the safe-handling package for professional-size rolls**

—permitting tape on hub to be transferred to or from turntable without danger of spilling—and simplifying the attachment of side flanges.

These "Firsts" are proof of the continuous research and development that keeps Audiotape foremost in the field. They are the result of more than a decade of experience—by the only company specializing solely in the manufacture of fine recording materials—both tape and discs.

That's why you can always look to Audio for the latest developments in the recording art. A trial order of Audiotape will speak for itself. Or send today for a free 300-foot sample.

*Trade Mark

AUDIO DEVICES, INC.
444 Madison Ave., New York 22, N. Y.

Please send me a free 300-foot sample reel of ☐ plastic base or ☐ paper base Audiotape.

NAME.....

COMPANY.....

ADDRESS.....

CITY.....STATE.....

NEWS OF THE INDUSTRY

Edited by WILLIAM P. O'BRIEN

Navy Needs Technicians

CURRENT military action in Korea has resulted in a large increase in over-all activity at the Naval Air Development Center (NADC), Johnsville, Pa. The NADC is now accepting applications for engineering and other technical positions from high-grade engineering, scientific, and mechanical personnel with education, training or experience in the fields of aeronautical, mechanical, electrical or electronics engineering, physics, mathematics, biology and clinical psychology. It is also seeking engineering draftsmen and laboratory mechanics who have considerable experience in aeronautical, electrical, electronic or mechanical drafting or shop work.

Under the management control of the Bureau of Aeronautics, the NADC performs development functions in the fields of aircraft electronics, pilotless aircraft, aviation armament and research and development in aviation medicine pertaining to the centrifuge.

Positions currently available, salaries offered and experience required are as follows:

Electronics engineer, GS-13 ($7,600–$8,600). Development, operation and maintenance of analog computer.

Physicist, GS-13 ($7,600–$8,600). Magnetic detection.

Electronics engineer, GS-12 ($6,400–$7,400). Sonar development.

Electrical engineer, GS-12 ($6,400–$7,400). Design and administrative experience as applied to aircraft systems.

Physicist, GS-12 ($6,400–$7,400). Sonar development.

Physicist (*Electronics*), *GS-12* ($6,400–$7,400). Design experience in adopting electronic methods

Latest Color TV Receiver

One of three experimental color TV receivers demonstrated by RCA in December is shown above. It contains 43 tubes, uses the latest tricolor picture tube containing about 600,000 phosphor dots for higher definition and has new red and blue phosphors for better brightness. Also demonstrated was a standard 16-inch black-and-white receiver, converted for color by inserting a tri-color picture tube, a new deflection yoke and other circuits containing 13 additional tubes. Since the RCA system is compatible, the received color pictures were shown side by side with standard black and white receivers

RTMA Board of Directors for 1950-1951

PRODUCED FOR YOUR REQUIREMENTS
- by the top specialists in the ceramic field

Hi-Q

CERAMIC PLATE CAPACITORS

Essentially similar, except in shape, to **Hi-Q** Disk Capacitors except that in the multiple units they do NOT have to have a common ground as is the case with disks. These **Hi-Q** Plates can be produced in an unlimited range of capacities, the number on a plate being limited only by the K of the material and the physical size of the unit. They offer the greatest available capacity per unit volume of any type condenser on the market.

Guaranteed minimum values of capacity up to 32,000 mmf per sq. in. are available. This is based on the use of Body 41 ceramic having 3000 as a dielectric constant "K" and .020 in. thickness and the formula:

$$C \text{ (mmf)} = \frac{.224 \text{ K A (Sq. in.)}}{D \text{ in.}}$$

If temperature compensating ceramics are used, the capacity will be considerably lower. Typical circuits are shown here, but almost any combination can be produced for your specific needs. Consult our engineers for complete details. Write for new **Hi-Q** datalog.

PC-100





1-2	.002	$+75$ -25 %	mf
3-4	220	$+50$ -50 %	mmf
4-5	220	$+50$ -50 %	mmf
5-6	.005	$+75$ -25 %	mf

PC-101



1-2	.002	$+75$ -25 %	mf
2-3	100	$+50$ -50 %	mmf
3-4	.005	$+75$ -25 %	mf
4-5	150	$+50$ -50 %	mmf
5-6	.005	$+75$ -25 %	mf

PC-102



1-2	.002	$+75$ -25 %	mf
3-5	150	$+100$ -0 %	mmf
4-5	.005	$+100$ -0 %	mf
5-6	100	$+75$ -25 %	mmf
6-7	.005	$+75$ -25 %	mf

PC-103



1-2	.002	$+75$ -25 %	mf
3-4	.008	Min %	mf
4-5	150	$+50$ -50 %	mmf
6-7	150	$+50$ -50 %	mmf

PC-104



3X .004 Min mf

PC-105



1-2	.003	$+75$ -25 %	mf
1-3	.005	$+75$ -25 %	mf

PC-107



1-2	150	$+75$ -25 %	mmf
1-3	500	$+75$ -25 %	mmf

Hi-Q COMPONENTS

Capacitors
Trimmers • Choke Coils
Wire Wound Resistors

BETTER 4 WAYS

- ✓ PRECISION
- ✓ UNIFORMITY
- ✓ DEPENDABILITY
- ✓ MINIATURIZATION

JOBBERS—ADDRESS: 740 Belleville Ave., New Bedford, Mass.

Hi-Q *Electrical Reactance Corp.*

OLEAN, N. Y.

SALES OFFICES: New York, Philadelphia
Detroit, Chicago, Los Angeles

PLANTS: Olean, N. Y., Franklinville, N. Y.
Jessup, Pa., Myrtle Beach, S. C.

to solving physical problems.

Physicist (Light), GS-12 ($6,400–$7,400). Design and development in field of light.

Electronics engineer, GS-11 ($5,400–$6,400). Flight control systems, antenna and specialized systems for radio-controlled aircraft and associated equipment; test and evaluation of electronic components and test equipment; radar development; aircraft or similar control devices; test and evaluation of developmental airborne search and attack equipment.

Physicist, GS-11 ($5,400–$6,400). Sonar development; radar development; electronic option in test and evaluation of developmental airborne search and attack equipment.

Electronics engineer, GS-9 ($4,600–$5,350). Installation of radio telemetering gear in pilotless aircraft, design or selection of special components and establishment of data—reduction calibrations; countermeasures equipment; radar development; missile guidance control.

Physicist, GS-9 ($4,600–$5,350). Optics.

Inquiry regarding the above positions should be made by letter addressed to the Industrial Relations Officer, U. S. Naval Air Development Center, Johnsville, Pa., or by personal visit to the NADC.

First TV in Canada

THE LATE John D. Woodlock, VE2HE, former assistant director of O'Sullivan College in Montreal, transmitted television signals recently from his home in Iberville, Quebec, Canada, using equipment designed by J. R. Popkin-Clurman, reported in August 1950 ELECTRONICS. Iberville is located about 28 miles north of the American border and 32 miles from the city of Montreal.

The transmitting equipment was on the air continuously from Sept. 1 to 5 using a carrier frequency of 53.51 mc (6-meter amateur band). Standard tv receivers modified by shifting the local oscillators down from channel 2 were used for field tests.

The transmitter radiated 25 watts peak and was fed into a VEE-DX type RD-13-A rotatable array mounted 90 feet high. Effective radiated power was estimated at 250 watts. Later, propagation tests were made with an erp of 5 kw.

Strong signals were received at Lacolle, Quebec, by VE2AMO, 21 air miles distant and at several places in the city of Montreal. The blanking bars were received at Lavaltrie, Quebec, by VE2SV, approximately 51 miles distant, with a faint picture visible.

The effective resolution of the pictures up to eight miles was better than 325 lines.

MEETINGS

JAN. 10-12: Second High Frequency Measurements Conference, sponsored by AIEE, IRE and NBS, Hotel Statler and Dept. of Interior Auditorium, Washington, D. C.

JAN. 22-26: AIEE Winter General Meeting, Hotel Statler, New York, N. Y.

MARCH 5-9: ASTM Spring Meeting and Committee Week, Cincinnati, Ohio.

MAR. 19-22: IRE Annual Convention, Hotel Waldorf Astoria and Grand Central Palace, New York City.

APR. 30-MAY 4: SMPTE Spring Convention, Hotel Statler, New York.

MAY 23-24: Fifth National Convention, American Society for Quality Control, Hotel Cleveland, Cleveland, Ohio.

JUNE 18-22: ASTM Annual Meeting, Atlantic City, New Jersey.

JUNE 25-29: AIEE Summer General Meeting, Royal York Hotel, Toronto, Ontario, Canada.

AUG. 28-SEPT. 8: Eighteenth British National Radio Show, Earls Court, London, England.

Signal Corps News

THE SIGNAL CENTER at Fort Monmouth, N. J., has over 700 vacancies for civilians who can qualify

(Continued on p 246)

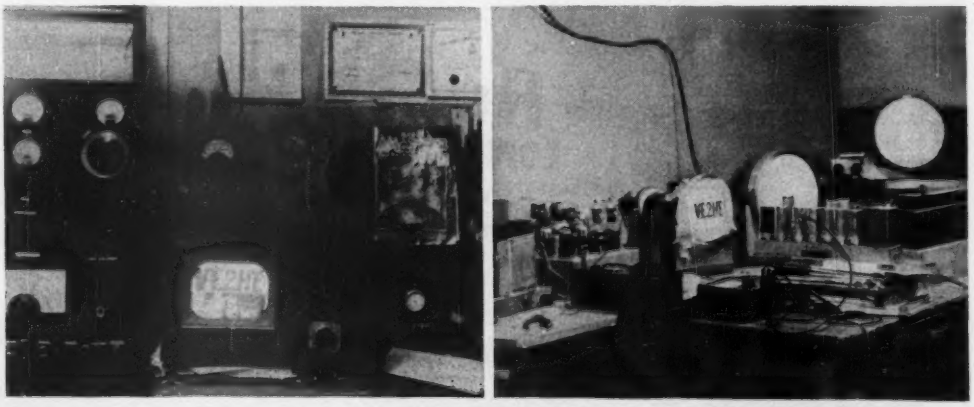

Equipment used in recent amateur tv transmissions showing the r-f portion of the transmitter, monitoring set, and phototube and video amplifier chassis facing test transparency on face of the transmitting crt

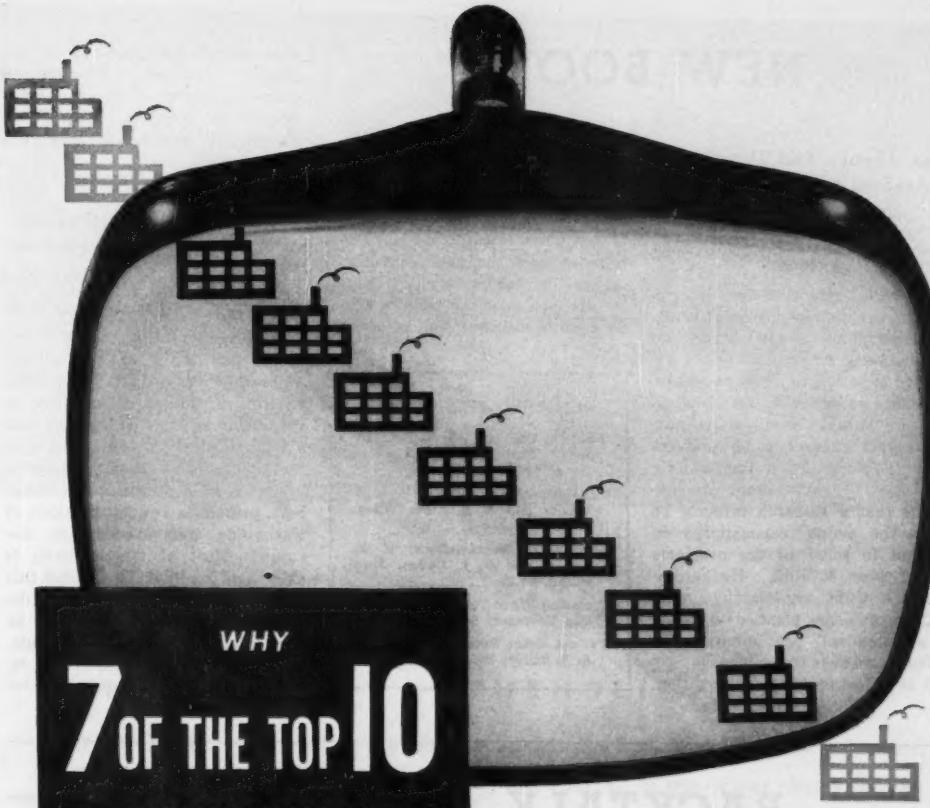

WHY

7 OF THE TOP 10

TELEVISION SET MANUFACTURERS USE

SYLVANIA

PICTURE TUBES

The important reasons behind the steadily increasing demand for Sylvania TV Picture Tubes are: (1) high quality performance, (2) broad national recognition.

Sylvania's picture tube experience includes leadership in 4 specialized fields . . . all basic to TV picture tube production. These are *radio, electronics, lighting, and phosphors.*

A Sylvania tube engineer, for example, invented the famous Ion Trap now generally adopted, under special Sylvania license, by other leading picture tube makers.

Sylvania's 25 years of lighting research, including advances in phosphors and filamentary wire techniques and coatings, has also contributed to the outstanding clarity and long life of Sylvania picture tubes.

Popular TV show tells millions

Set owners are being kept informed of Sylvania's leadership by the big, popular television show, *"Beat the Clock,"* on CBS-TV. Every week this program emphasizes Sylvania's unique background and the fine quality of all Sylvania products, thus assuring you that Sylvania picture tubes are an added selling aid to the sets you manufacture.

New folder, giving complete descriptions and ratings of all Sylvania TV Picture Tubes is yours for the asking. For your copy address: Sylvania Electric Products Inc., Dept. R-1101, Emporium, Penna. *Sylvania Representatives are located in all foreign countries. Names on request.*

SYLVANIA ELECTRIC

RADIO TUBES; TELEVISION PICTURE TUBES; ELECTRONIC PRODUCTS; ELECTRONIC TEST EQUIPMENT; FLUORESCENT TUBES, FIXTURES, SIGN TUBING, WIRING DEVICES; LIGHT BULBS; PHOTOLAMPS; TELEVISION SETS

NEW BOOKS

The Theory and Practice of Industrial Research

BY DAVID BENDEL HERTZ. *McGraw-Hill Engineering Management Series, McGraw-Hill Book Co., New York,* 1950, 354 *pages,* $5.50.

THIS BOOK deals with the "application of the methodologies of scientific disciplines in industry" and the necessity for efficient use of the limited reservoir of creative ability. It defines research as the "application of human intelligence in a systematic manner to a problem whose solution is not immediately available". The author recommends that a research director be given the prime responsibility to attempt to solve all the problems turned over to him. He recommends a tight organization, with specific problems planned in detail in advance and preliminary estimates on what is to be done.

It is unfortunate that the author did not use the word "development" instead of "research" because his suggestions would have been at least somewhat more applicable. However, no attempt to distinguish between basic or applied research or development is carried through the discussions. The policies which he recommends are not in accordance with those practiced in productive research organizations where creative work is done.—WALDO H. KLIEVER, *Director of Research, Minneapolis-Honeywell Regulator Co.*

RELEASED THIS MONTH

Electrons and Holes in Semiconductors; William Shockley; Van Nostrand; $9.75.

Fundamentals of Acoustics; L. E. Kinsler and A. R. Frey; Wiley; $6.00.

Micro-Wave Measurements; H. M. Barlow and A. L. Cullen; Macmillan; $6.00.

Traveling Wave Tubes; J. R. Pierce; Van Nostrand; $4.50.

TV and Other Receiving Antennas; A. B. Bailey; Rider; $6.00.

Principles and Applications of Waveguide Transmissions

BY G. C. SOUTHWORTH, *Bell Telephone Laboratories. D. Van Nostrand Co., Inc., New York,* 1950, 689 *pages,* $9.50.

THE AUTHOR of this book is internationally known as one of the pioneers in waveguide work and one of the outstanding authorities in this field. A book written by him should be expected to be, and is in fact, outstanding in many respects.

As the title of this book states, both principles and applications of waveguide transmission are discussed. Most of the emphasis is placed on the applications and this book will be invaluable to all development engineers employing or developing microwave components. Seldom in the experience of this re-

(Continued on p 140)

BACKTALK

This Department is Operated as an Open Forum Where Readers May Discuss Problems of the Electronics Industry or Comment Upon Articles that ELECTRONICS has Published

Video on Tape

DEAR SIRS:

I'M AFRAID I can't quite agree with John Boyers' conclusions (see *Backtalk,* and the Editorial page of ELECTRONICS, June, 1950) that anything so plebeian as a direct approach to the problem of recording video frequencies on magnetic tape is obviously impractical. To be sure, the application of new principles to the problem is most desirable and logical, but the cost of doing the job by the "brute-force" method is not as fantastic as it may seem.

The calculation presented by Mr. Boyers is the first one everyone makes, of course. However, the cost given ($1,275.00 for a fifteen-minute recording) is somewhat high since, in the quantities that any large user buys tape, the net price for the material would come to about $760.00. If the tape were used only 100 times (and re-use of the tape is one of the objectives in developing a new system), the cost per use would be only $7.60.

At the present time, television recordings are made on 16-mm and 35-mm film. The cost of a fifteen-minute print (neglecting entirely the negative costs) is about $15.00 and $50.00 respectively. These films are reproduced once in the city to which they are sent and then destroyed. So, even using an elementary approach to the recording problem, magnetic recording of television programs would result in a 2 to 1 saving over 16-mm costs and better than a 6 to 1 saving in 35-mm costs. When it is considered that well in excess of 200 hours (or 800 quarter-hours) of release points are used every week by each network, the potential savings are seen to be substantial. I don't think that the approach is as "obviously" impractical as Mr. Boyers concludes!

HOWARD A. CHINN
Columbia Broadcasting System, Inc.
New York, N. Y.

It Is to Laugh

DEAR SIR:

YOUR *"Cross Talk"* column in the June 1950 issue under the heading, "Landlord" illustrates perfectly the comic aspect of what passes for engineering these days. The reference to Alpine, however, while quite

(Continued on p 262)

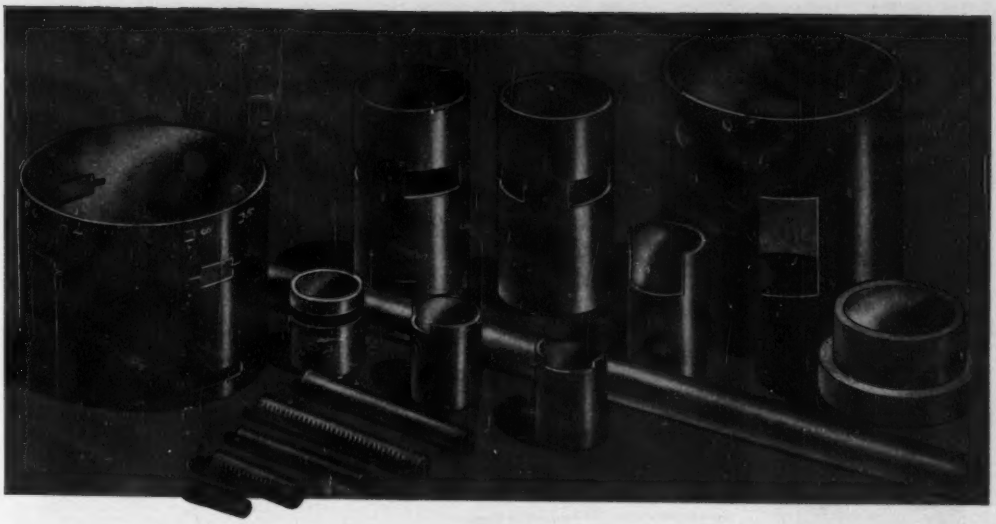

MANY MANUFACTURERS of ELECTRICAL EQUIPMENT are finding our CLEVELITE* and COSMALITE* . . . spirally laminated paper base phenolic tubing meets their most exacting requirements. Available in diameters, wall thicknesses and lengths to meet endless adaptations. What are your requirements?

*Trade Marks

Cleveland

PHENOLIC TUBES

are the first choice of the Radio and Television Industries! For example, CLEVELITE* is the proper choice for Fly-back and High Voltage Transformers. It insures perfect satisfaction. Furthermore, CLEVELITE'S high dielectric strength . . . low moisture absorption . . . strength, low loss and good machineability meet widely varied requirements and give fine performance. PROMPT DELIVERIES are available through our large production capacity. Inquiries invited . . . Samples gladly sent.

The CLEVELAND CONTAINER Co.
6201 BARBERTON AVE. CLEVELAND 2, OHIO
PLANTS AND SALES OFFICES at Plymouth, Wisc., Chicago, Detroit, Oydenburg, N.Y., Jamesburg, N.J.
ABRASIVE DIVISION at Cleveland, Ohio
CANADIAN PLANT: The Cleveland Container, Canada, Ltd., Prescott, Ontario

REPRESENTATIVES

NEW YORK AREA	R. T. MURRAY, 614 CENTRAL AVE., EAST ORANGE, N. J.
NEW ENGLAND	R. S. PETTIGREW & CO., 968 FARMINGTON AVE. WEST HARTFORD, CONN.
CANADA	WM. T. BARRON, EIGHTH LINE, RD #1, OAKVILLE, ONTARIO

versatile
Multi-channel telegraph A1 or telephone A3.
STABLE
High stability (.003%) under normal operating conditions.
RUGGED
Components conservatively rated. Completely tropicalized.
Model 446 transmitter operates on 4 crystal-controlled frequencies (plus 2 closely spaced frequencies) in the band 2.5-13.5 Mcs (1.6-2.5 Mcs available). Operates on one frequency at a time; channeling time 2 seconds. Carrier power 350 watts, A1 or A3 AM. Stability .003% using CR-7 (or HC-6U) crystals. Operates in ambient 0° to + 45° C using mercury rectifiers; -35° to + 45° C using gas filled rectifiers. Power supply, 200-250 volts, 50/60 cycles, single phase. Conservatively rated, sturdily constructed. Complete technical data on request.
Here's the ideal general-purpose high-frequency transmitter! Model 446 . . . 4-channel, 6-frequency, medium power, high stability. Suitable for point-to-point or ground-to-air communication. Can be remotely located from operating position. Co-axial fitting to accept frequency shift signals.
Consultants, designers and manufacturers of standard or special electronic, meteorological and communications equipment.
AER -O- COM
AERONAUTICAL COMMUNICATIONS EQUIPMENT, INC.
1090 Douglas Road, Miami 34, Florida

SMALL
PARTS
Cost less when made by
MULTI-SWAGE
The economy way to get a million small parts similar to these —
Examine the tubular metal parts shown here twice size. If you use anything similar . . . in large quantities . . . important savings can be yours. Send us the part and specs. Our quotation will show why the Bead Chain Company's MULTI-SWAGE Process has long been known as the most economical method of making electronic tube contact pins, terminals, jacks and sleeves. And, why more and more users of mechanical parts (up to ¼" dia. and to 2" length) employ our facilities. WRITE for Data Bulletin.
THE BEAD CHAIN MANUFACTURING CO.,
Tr. Mark 88 MOUNTAIN GROVE ST., BRIDGEPORT 5, CONN.

CHECK LIST of selected titles in the M.I.T. RADIATION LABORATORY SERIES

1. WAVEGUIDE HANDBOOK

Vol. 10. Edited by N. MARCUVITZ, Polytechnic Institute of Brooklyn. **428 pages, $7.50**

Presents in compact form all currently available theoretical data and some experimental data on the properties of microwave transmission lines, microwave circuit elements (obstacles, windows, discontinuities, bends, junctions and couplings) and of some structures, such as cavities, which may be considered as composites of these.

2. PROPAGATION OF SHORT RADIO WAVES

Vol. 13. Edited by DONALD E. KERR. Johns Hopkins University. **739 pages, $10.00**

This volume treats the phenomena associated with the propagation of short radio waves between terminal points, whether they be the radar antenna serving a dual purpose or the antennas of a communications system. Emphasizes methods of planning experiments and of analyzing results.

3. THEORY OF SERVOMECHANISMS

Vol. 25. Edited by H. M. JAMES, Purdue Univ.; N. B. NICHOLS, Taylor Instrument Co.; and R. S. PHILLIPS, Univ. of Southern Calif. **375 pages, $5.00**

4. PULSE GENERATORS

Vol. 5. G. N. GLASOE, Rensselaer Polytechnic Institute; and J. V. LEVACQZ, Johns Hopkins Univ. **737 pages, $9.00**

5. MICROWAVE RECEIVERS

Vol. 23. Edited by S. N. VAN VOORHIS, Assoc. Professor of Physics, Univ. of Rochester. **611 pages, $8.50**

6. TECHNIQUE OF MICROWAVE MEASUREMENTS

Vol. 11. Edited by C. G. Montgomery, Associate Professor of Physics, Yale University. **937 pages, $10.00**

7. VACUUM TUBE AMPLIFIERS

Vol. 18. Edited by GEORGE E. VALLEY, JR., M. I. T.; and HENRY WALLMAN, M. I. T. **733 pages, $10.00**

SEE THESE BOOKS 10 DAYS FREE

McGraw-Hill Book Co., Inc.,
330 W. 42nd St., New York 18

Send me book(s) corresponding to numbers encircled below for 10 days' examination on approval. In 10 days I will remit for book(s) I keep, plus few cents for delivery, and return unwanted book(s) postpaid. (We pay for delivery if you remit with this coupon; same return privilege.)

1 2 3 4 5 6 7

Name .....

Address .....

City .....Zone....State.....

Company .....

Position L-1-51

This offer applies to U. S. only.

RELAYS BY GUARDIAN

Screw Terminal Hermetic Housing

RESOLVE IN 1951 to improve your products . . . especially radio, armament and power units coming under government contract. Let Guardian, No. 1 supplier of *improved* electrical controls, produce single units or complete control assemblies for you . . . in quantity. Guardian **GOVERNMENT APPROVED CONTROLS** will insure smooth, satisfactory performance.

The Series 335 D. C. Relay shown above, is typical of Guardian units built to the rigorous standards of aviation relays. Furnished open, or with a variety of HERMETICALLY SEALED housings.

New Hermetically Sealed Relay catalog 5-H is yours for the asking.

Series 595 D.C.

Series 210 A.C.—215 D.C.

Series 220 A.C.

Series 695 D.C.

Series 610 A.C.—615 D.C.

***Write*— ASK US TO MAKE SPECIFIC RECOMMENDATIONS. NO OBLIGATION.**

GUARDIAN ELECTRIC

1625-A W. WALNUT STREET CHICAGO 12, ILLINOIS

A COMPLETE LINE OF RELAYS SERVING AMERICAN INDUSTRY

AMPHENOL

LOW-LOSS CABLES!

AMPHENOL Cables are produced to standards surpassing military specifications for electrical performance and mechanical excellence. The cables illustrated are only representative of the wide variety of types and sizes designed for every application.

AMPHENOL RF CABLES

Because of its flawless transmission of RF signals, AMPHENOL Coaxial Cable is preferred by electronics men everywhere. Closer tolerances, flexibility and extreme low-loss make AMPHENOL Coax and Twinax the most demanded cables on the market.

AMPHENOL TWIN-LEAD

Servicemen and installers of TV and FM antennas name AMPHENOL Twin-Lead the most reliable twin-lead available. Unaffected by extreme heat or cold, AMPHENOL Twin-Lead with weatherproof brown polyethylene dielectric resists the harmful effects of ultra-violet rays, oil, chemical or gas fumes and salt air.

AMPHENOL REMOTE CONTROL CABLE

AMPHENOL Multi-wire Remote Control Cable for low voltage applications is recognized as the most efficient and dependable cable made. Recommended for all circuits up to 28 volts, the wires are easily separated and stripped and brown polyethylene insulation provides excellent protection against weather.

AMERICAN PHENOLIC CORPORATION

1830 SO. 54TH AVENUE • CHICAGO 50, ILLINOIS

viewer has such a coordinated picture been assembled of up-to-date developments in a particular field as this book does with regard to the work of the Bell Telephone Laboratories. In this respect this book could be compared to Volume 9 of the Radiation Laboratory Series. The fact that substantially more weight is given and space devoted to the work done within the Bell Telephone Laboratories than to the work of others was to be expected and detracts only very slightly from the value of the book.

Introductory Theory

After a very interesting historical introduction, basic concepts are given on networks, transmission lines, electromagnetic waves and waveguide theory. The discussion of these principles is given in the first seven chapters, which are necessary for an integrated presentation but will not be found as useful and satisfactory as the following ones. Some readers may object for instance to seeing critical coupling and maximally flat coupling confused in Section 2.5, or not completely agree with statements like the following: "according to one view of electricity the individual charges to which lines of force attach themselves are unable to flow through the conductor with the velocity of light. If this is true, lines of force snap along from one charge to the next in a rather mysterious fashion".

The eighth chapter deals with impedances in waveguides, junctions, irises, tuners and cavities.

The ninth chapter considers waveguide components in general, transformers and filters. Here the quality of the book and the wealth of material made available become outstanding. New information previously unpublished is given; the problem of branching filters is extensively dealt with together with that of more conventional filters, phase shifters, hybrid junctions, directional couplers, mode converters, rotary joints and attenuators.

The next chapter covers antennas, with a particularly excellent and complete treatment of horn antennas. Leaky waveguide antennas and dielectric antennas are dealt

EICO KITS and INSTRUMENTS

320K SIG. GEN. KIT $19.95
Wired $29.95

New 950K COND.-RES. COMP. BRIDGE KIT $19.95 Wired $29.95

New 1040K BATTERY ELIM. KIT $22.95 Wired $29.95

511K VOM KIT $14.95
Wired $17.95

145K SIG. TRACER KIT $18.95
Wired $28.95

HV PROBE
(Wired only) $6.95

RF PROBE KIT $3.75
Wired $5.95

C-5 5MC CRYSTAL $3.95

New 315K DELUXE SIG. GEN. KIT $39.95 Wired $59.95

New 425K TUBE TESTER KIT $29.95
Wired $44.95

360K SWEEP GEN. KIT $29.95
Wired $49.95

Harry R. Ashley, President of EICO, inspecting the use of the EICO Model 425 Oscilloscope and Model 221 Vacuum Tube Voltmeter at one of the important alignment positions on the Emerson television production line, New York plant.

For Laboratory Precision at Lowest Cost—the Leaders Look to EICO!

FOR electronics test equipment, there's no tougher proving ground than the factories where TV sets are made. There's where the pace is fastest, precision requirements the highest, costs the tightest —and day-after-day dependability an absolute must.

In both the giant New York and New Jersey television plants of the Emerson Radio & Phonograph Corporation — at the many critical constant-duty testing positions along the production line — EICO instruments stand guard. For Emerson has found that for speed, accuracy and trustworthiness, at lowest cost, EICO instruments always deliver the fullest measure of value.

From coast to coast, in one leading TV factory after another, this is the experience — *this is the proof of EICO superiority* — that is repeated again and again. The top-flight TV set makers have discovered — and over 50,000 servicemen have learned — that *for the industry's greatest instrument values, at the industry's lowest costs — it's EICO!*

Be sure you look at the *EICO* line before you buy any higher-priced equipment! Each *EICO* product is jam-packed with unbelievable value. *YOU* be the judge — compare *EICO* at your local jobber today — and *SAVE!* Write *NOW* for free newest Catalog 1-E.



New 425K 5" SCOPE KIT $39.95
Wired $69.95

New 221K VTVM KIT $23.95
Wired $49.95

EICO
ELECTRONIC INSTRUMENT CO., Inc.
276 NEWPORT STREET, BROOKLYN 12, NEW YORK

Prices 5% higher on West Coast. Due to unsettled conditions, prices and specifications are subject to change without notice.

© 1950, Electronic Instrument Co., Inc.

DO YOU KNOW?

—that a PILOT LIGHT CAN IMPROVE YOUR PRODUCT

. . . . add attraction — safety — service?

Ask DIALCO

— what lamp to use
— how to use it
— what it will do
— what it will cost

THIS MAY BE THE ONE

Designed for low cost NE-51 Neon

- Built-in Resistor
- Patented
- U/L Listed
- Rugged

Catalogue Number 521308 — 997 for 110 or 220 volts.

SAMPLES for design purpose NO CHARGE

NEW! Write for the "HANDBOOK OF PILOT LIGHTS."

Write us on your design problems.

The DIAL LIGHT COMPANY of AMERICA

Foremost Manufacturer of Pilot Lights.

900 BROADWAY, NEW YORK 3, N. Y. TELEPHONE SPRING 7-1300

CONTINUOUSLY VARIABLE DUAL - HEAVY DUTY REGULATED DC SUPPLIES

✓ FEATURES

- ✓ DUAL regulated outputs, continuously variable, 0 to 600 volts.
- ✓ Maximum current 200 milliamperes each, or 400 combined.
- ✓ Regulation better than .5%.
- ✓ 6.3 volts AC at 10 amperes center-tapped.
- ✓ Ripple voltage less than 10 millivolts.
- ✓ Stabilized bias supply.

MODEL D6 POWER SUPPLY

Dual Output . . . Heavy Duty

✓ Request Bulletin No. 53 for Detailed Specifications

Oregon ELECTRONICS MFG. CO.

206 S.W. WASHINGTON ST., PORTLAND 4, ORE., U.S.A.

Made to Order for

QUALITY, ECONOMY AND PERFORMANCE

Lewis TELEVISION COILS, SPRINGS, WIREFORMS



You can depend on Lewis for your spring needs — whether job-designed or made to specification — for Lewis has the experience, facilities and know-how essential to designing and manufacturing *practical* springs, wireforms and television coils at *practical* prices. Highly efficient methods and techniques of manufacturing developed by Lewis permit economical, high production.

Lewis Engineers, long experienced in spring design and application, can help you select the *right* springs for the job — springs that past experience has proved most economical and efficient for the exact use.

Lewis Spring Engineers welcome the opportunity to discuss your spring, coil, or wireform requirements without obligation. Call or write today.

LEWIS SPRING & MANUFACTURING CO.

2656 West North Avenue, Chicago 47, Ill.

Lewis

PRECISION SPRINGS

THE FINEST LIGHT SPRINGS AND WIREFORMS OF EVERY TYPE AND MATERIAL

In this panel are illustrated standard models of HELIPOT multi-turn and single-turn precision potentiometers—available in a wide range of resistances and accuracies to fulfill the needs of nearly any potentiometer application. The Beckman DUODIAL is furnished in two designs, and four turns-ratios, to add to the usefulness of the HELIPOT by permitting easy and rapid reading or adjustment.

A B C

MODELS A, B, & C HELIPOTS
A—10 turns, 46" coil, 1-13/16" dia., 5 watts—resistances from 10 to 300,000 ohms.
B—15 turns, 140" coil, 3-5/16" dia., 10 watts—resistances from 50 to 500,000 ohms.
C—3 turns, 13-1/2" coil, 1-13/16" dia., 3 watts—resistances from 5 to 50,000 ohms.



D E

MODELS D AND E HELIPOTS
Provide extreme accuracy of control and adjustment, with 9,000 and 14,400 degrees of shaft rotation.
D—25 turns, 234" coil, 3-5/16" dia., 15 watts—resistances from 100 to 750,000 ohms.
E—40 turns, 373" coil, 3-5/16" dia., 20 watts—resistances from 200 ohms to one megohm.

F G

MODELS F AND G PRECISION SINGLE-TURN POTENTIOMETERS
Feature both continuous and limited mechanical rotation, with maximum effective electrical rotation. Versatility of designs permit a wide variety of special features.
F—3-5/16" dia., 5 watts, electrical rotation 359°—resistances 10 to 100,000 ohms.
G—1-5/16" dia., 2 watts, electrical rotation 356°—resistances 5 to 20,000 ohms.

LABORATORY MODEL HELIPOT
The ideal resistance unit for use in laboratory and experimental applications. Also helpful in calibrating and checking test equipment. Combines high accuracy and wide range of 10-turn HELIPOT with precision adjustability of DUODIAL. Available in eight stock resistance values from 100 to 100,000 ohms, and other values on special order.

R W

MODELS R AND W DUODIALS
Each model available in standard turns-ratios of 10, 15, 25 and 40 to 1. Inner scale indicates angular position of HELIPOT sliding contact, and outer scale the helical turn on which it is located. Can be driven from knob or shaft end.
R—2" diameter, exclusive of index.
W—4-3/4" diameter, exclusive of index. Features finger hole in knob to speed rotation.

FOR PRECISION POTENTIOMETERS come to Helipot

For many years The HELIPOT Corporation has been a leader in the development of advanced types of potentiometers. It pioneered the *helical* potentiometer—the potentiometer now so widely used in computer circuits, radar equipment, aviation devices and other military and industrial applications. It pioneered the DUODIAL*—the turns-indicating dial that greatly simplifies the control of multiple-turn potentiometers and other similar devices. And it has also pioneered in the development of many other unique potentiometric advancements where highest skill coupled with ability to mass-produce to close tolerances have been imperative.

In order to meet rigid government specifications on these developments—and at the same time produce them economically—HELIPOT* has perfected unique manufacturing facilities, including high speed machines capable of winding extreme lengths of resistance elements employing wire even less than .001" diameter. These winding machines are further supplemented by special testing facilities and potentiometer "know-how" unsurpassed in the industry.

So if you have a problem requiring *precision potentiometers* your best bet is to bring it to The HELIPOT Corporation. A call or letter outlining your problem will receive immediate attention!

*Trade Marks Registered

The versatility of the potentiometer designs illustrated above permit a wide variety of modifications and features, including double shaft extensions, ganged assemblies, the addition of a multiplicity of taps, variation of both electrical and mechanical rotation, special shafts and mounting bushings, high and low temperature operation, and close tolerances on both resistance and linearity. Examples of potentiometers modified for unusual applications are pictured at right.

A C

3-GANGED MODEL A HELIPOT AND DOUBLE SHAFT MODEL C HELIPOT
All HELIPOTS, and the Model F Potentiometer, can be furnished with shaft extensions and mounting bushings at each end to facilitate coupling to other equipment.
The Model F, and the A, B, and C HELIPOTS are available in multiple assemblies, ganged at the factory on common shafts, for the control of associated circuits.

B F

MULTITAPPED MODEL B HELIPOT AND 6-GANGED TAPPED MODEL F
This Model B Helipot contains 40 taps, placed as required at specified points on coil. The Six-Gang Model F Potentiometer contains 19 additional taps on the middle two sections. Such taps permit use of padding resistors to create desired non-linear potentiometer functions, with advantage of flexibility, in that curves can be altered as required.

THE Helipot CORPORATION, SOUTH PASADENA 2, CALIFORNIA

GOT A RELAY PROBLEM?
USE R-B-M
GENERAL PURPOSE RELAYS

Low in Cost — Small in Size — Dependable in Performance — AC or DC

For industrial smoke detectors

For radio transmitter panels


For television screen enlargers

For auxiliary gas engine generators

For photoelectric street lighting control


For automatic furnaces

For jet aircraft preheaters

IN ADDITION R-B-M General Purpose Relays are used on X-Ray apparatus, permanent wave machines, wire recorders, automotive radio telephone communication equipment, vending machines, coin operated phonographs and many other applications.

What is your relay problem?

Write Dept. F-1 today for Bulletin 570

R-B-M DIVISION ESSEX WIRE CORP.

Logansport, Indiana

RBM

MANUAL AND MAGNETIC ELECTRIC CONTROLS — FOR AUTOMOTIVE, INDUSTRIAL, COMMUNICATION AND ELECTRONIC USE

with in detail. Here again, material previously unpublished or available only through patent literature is supplied. Parabolic antennas and lens antennas are also dealt with, in somewhat less detail. In this chapter particular mention should be made of not only the section on horns but also that on corner reflectors, an important subject not usually covered in textbooks.

The eleventh chapter deals with tubes capable of operating at microwave wavelengths. The section on microwave amplifiers is particularly interesting. Information not previously available on circuits using the microwave Western Electric tube type 416A is also given. Descriptions of the multigap velocity variation tubes (which used to be known during the war as Samuel tubes) are given. Magnetron oscillators are also dealt with in reasonable detail; some basic information is given on traveling-wave tube amplifiers and TR and ATR tubes.

The twelfth chapter, on modulation and demodulation, contains, besides some other very useful information on converters, a summary of a theory on frequency conversion by crystals which is published here for the first time and which is attributed to A. B. Crawford.

In conclusion, this book contains a very complete summary of applications of waveguide components, suggests new ideas and points the way to future progress in the microwave field.—E. G. FUBINI, *Supervising Engineer, Airborne Instruments Laboratory, Mineola, N. Y.*

Survey of Modern Electronics

BY PAUL G. ANDRES. *John Wiley & Sons, Inc., New York*, 1950, 522 *pages*, $5.75.

IN THE PREFACE to this book on electronics the author states that it is intended for use in a survey course in electronics for electrical engineering students who have not yet begun to specialize in power, communication or any other field. The emphasis throughout the book is very frankly on the description of electronic devices by words and pictures rather than by mathematics. The many applications of

"It happened in the 3rd inning . . ."

It was the first day of the World Series. A big razor manufacturer had paid some $800,000 for the rights to televise the games. It was the third inning—and the Yankees and Phillies were tied 0 to 0. Millions of fans were glued to their sets when—pfft!—three million sets went black, and for twenty minutes there was no game insofar as television was concerned! What happened?...I don't know—that's for the sponsor and the broadcasting company to decide. But you can bet your bottom dollar that it was some little thing—like insulation at a vital point —that caused the breakdown!

In electrical insulation, the price of failure is severe—product breakdown, rejects, lost time and labor.

That's why you find BH "649" Fiberglas Tubing and Sleeving in equipment that must not fail—jet planes, electronic equipment, engines. Manufacturers of home appliances and industrial equipment, who insist on BH "649", get this same high measure of protection for their tough insulation problems.

In BH "649" they get an insulation that is toughened against abrasion, will not support combustion. Stays supple after baking 12 hours at 300°F. Does not crystallize at −67°F. Unaffected by grease and oil. Speeds production because it cuts without fraying, spreads to cover knobs and terminals.

BH "649" is one of a family of BH-insulations, each designed to meet particular conditions in service. Give us a few facts about your requirements—product, temperatures, voltages. We will furnish production samples for testing.

Address Dept. E-1
Bentley, Harris Manufacturing Co.
Conshohocken, Pa.

BH *Fiberglas** **SLEEVINGS**

*BH Non-Fraying Fiberglas Sleevings are made by an exclusive Bentley, Harris process (U. S. Pat. No. 2393530). "Fiberglas" is Reg. TM of Owens-Corning Fiberglas Corp.

STANCOR TRANSFORMERS

Specified as original components by the biggest radio and TV set makers in the industry. They have to be good!



WRITE.
inquiries promptly answered

STANDARD TRANSFORMER CORPORATION
3578 ELSTON AVENUE, CHICAGO 18, ILLINOIS

Permanent Magnet Problems Can Be Simple . . . If You Have:

- ✓ Quality Magnets
- ✓ Prompt Delivery
- ✓ Complete Engineering Service
- ✓ Low Unit Cost

For 49 years Thomas & Skinner has geared its facilities to provide the answer to all permanent magnet problems.

Why not let Thomas & Skinner engineers work with you in the design and production of the *right* permanent magnet for your application? Write or call us today.

THOMAS & SKINNER — *Specialists in magnetics: permanent magnets and laminated cores*

THOMAS & SKINNER Steel Products Company
1120 East 23rd Street · Indianapolis, Indiana

Top-Flight Business Leaders

SHIP TODAY VIA TWA

TWA's new, fast, *all-cargo* "Sky Merchant" Fleet speeds your shipments to important markets in U. S. and overseas.

Experienced shippers know the smartest way to ship is via dependable TWA *All-cargo* "Sky Merchants."

Direct routes and connections serve more than 60 important market centers in the U. S. *All-cargo* flights overseas every week end, as well as frequent flights direct to London, Frankfurt, Paris, Zurich, Geneva, Milan, Rome.

Check these outstanding advantages:

1. **Save shipping time.**
2. **Obtain faster, wider distribution.**
3. **Replenish stocks practically overnight.**
4. **Reduce risk of pilferage, damage, loss.**
5. **Save costs on crating and insurance.**
6. **Receive careful, dependable handling of all shipments by TWA cargo specialists.**
7. **And remember, TWA service meets the urgency of every emergency.**

Make a memo—NOW—to phone TWA (Trans World Airlines) for information, rates, schedules, quick pick-up service. Request interesting folder from Cargo Sales Manager, TWA, 60 East 42nd Street, New York 17, N. Y.

All TWA flights carry Air Mail and Air Cargo.

TWA
TRANS WORLD AIRLINES
U.S.A. · EUROPE · AFRICA · ASIA

Capacitors

sealed for Life with G-E silicone rubber

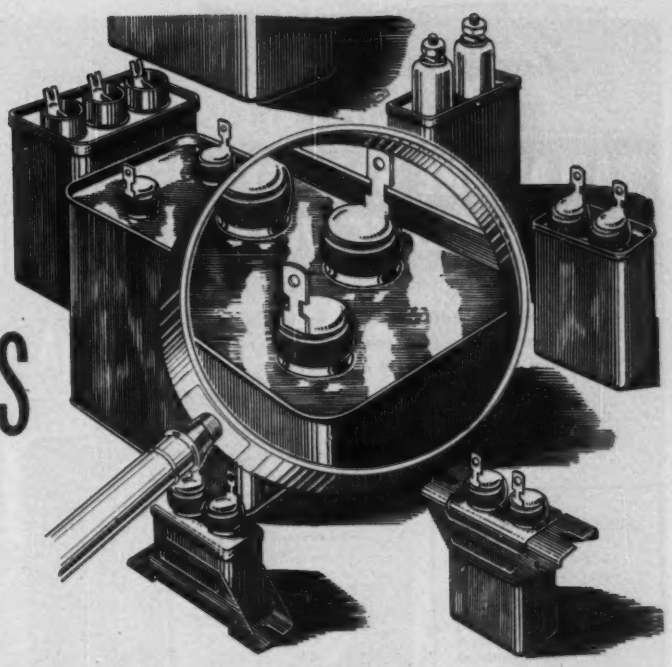

SILICONE—the amazing new synthetic that made headlines when General Electric brought it out—is back in the news again. For today, G-E small capacitors, up through 5000 volts, are hermetically sealed with G-E silicone rubber bushings or gaskets.

This means that your new G-E capacitor is sealed positively, permanently—for maximum life. For silicone seals by compression alone, without the use of adhesives. It will never shrink, loosen or pull away—it remains elastic at any operating temperature a capacitor will ever meet. It is impervious to oils, alkalies and acids. Its dielectric strength is permanently high and it is not easily damaged during installation for it has a flexibility that withstands mechanical and thermal shock.

This exclusive G-E feature—designed to surpass established installation requirements—makes General Electric capacitors finer and more dependable than ever before. *Apparatus Dept., General Electric Company, Schenectady 5, N. Y.*

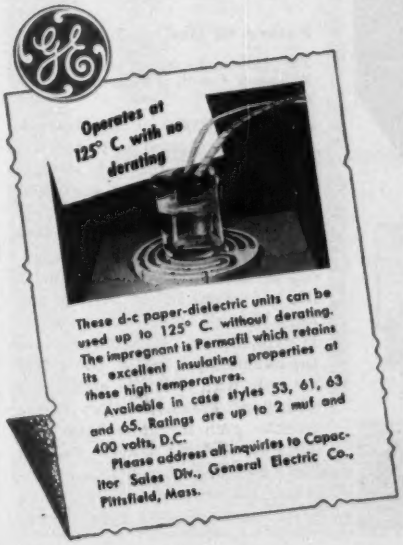

These d-c paper-dielectric units can be used up to 125° C. without derating. The impregnant is Permafil which retains its excellent insulating properties at these high temperatures.

Available in case styles 53, 61, 63 and 65. Ratings are up to 2 muf and 400 volts, D.C.

Please address all inquiries to Capacitor Sales Div., General Electric Co., Pittsfield, Mass.

Silicone-rubber bushings, permanently elastic and formed to close tolerances, seal themselves by compression to the capacitor cover. They are used with capacitors 1500-v d-c, or 660-v a-c, and lower. Silicone rubber gaskets with plastic or porcelain stand-offs are used for higher voltages.

GENERAL ELECTRIC

407-272

Announcing...
IMPROVEMENTS IN THE
BALLANTINE BATTERY OPERATED ELECTRONIC VOLTMETER

Achieving a tenfold increase in sensitivity, higher input impedance, improved low frequency response and substantial reduction in size and weight.

VOLTAGE RANGE:
100 microvolts to 100 volts in 6 decade ranges.

INPUT IMPEDANCE:
2 megohms shunted by 8 mmfd on high ranges and 15 mmfd on low ranges.

FREQUENCY RANGE:
2 cycles to 150,000 cycles.

ACCURACY:
3%, except 5% below 5 cycles and above 100,000 cycles.

- Available multipliers increase the voltage range to 1,000 or 10,000 volts.
- Available precision shunt resistors permit the measurement of AC currents from 1 ampere down to one-tenth of a microampere.
- Features the well-known Ballantine logarithmic voltage and uniform DB scales.
- Battery life over 100 hours.
- Can also be used as a flat pre-amplifier with a maximum gain of 60 DB. Because of the complete absence of AC hum, the amplifier section will be found extremely useful for improving the sensitivity of oscilloscopes.

MODEL 302B
Size: 6⅛" x 7½" x 12⅜".
Weight: 14 lbs.
Price complete with cover and batteries: $215.

For further information on this Voltmeter and the Ballantine Model 300 Voltmeter, Wide-Band Voltmeters, Peak to Peak Voltmeters and accessories such as Decade Amplifiers, Multipliers, and Precision Shunt Resistors, write for catalog.

BALLANTINE LABORATORIES, INC.
100 FANNY ROAD, BOONTON, N. J.

electronics treated include a number which are not to be found in other texts of this general level—some interesting examples are the sections on Electrical Detearing and Precipitation, The Mass Spectrometer, Metal Detectors and The Electroencephalograph.

This broad treatment would certainly serve to arouse an interest in the field of electronics in the minds of electrical and other engineering students who have not begun to specialize. Although there is some gap between the elementary treatment of such subjects as the triode amplifier and the associated application example—an automatic pilot in this case—the excellent problems at the end of each chapter would serve to fill in if they were properly used.

Electrical engineering students are often plunged into the detailed study of the elements of electronic circuits in their junior or senior year without being provided with reasons for the importance of these elements. A survey course based on a book such as this would help to explain why the more detailed and more mathematical studies which follow are necessary.

A goodly number of references are given at the end of each chapter, and the index appears to be quite complete.—VINCENT C. RIDEOUT, *Assoc. Prof. of Electrical Engineering, Univ. of Wisc.*

Father of Radio

The Autobiography of Lee de Forest. Wilcox & Follett, Chicago, 1950, 500 *pages,* $5.00.

ANY DISBELIEVERS of the idea that the way to succeed is to try, try again had better read this story of "old Doc" and become converted. For this is an incredible story of success and failure, one following the other, time after time throughout the first fifty years of a man's life and of the life of wireless and radio. Success in invention; failure in exploitation. It is the story of the unfinanced inventor, one gifted not only with technical ability but with great dreams; a story of the troubles such inventors have. All sorts of troubles; finances and the lack of them; unscrupulous associates; lawyers; stock salesmen; great companies with great funds;

Do you know about these

NEW TUBES for Pulse Modulator Applications

UNITED

HIGH VOLTAGE—HIGH VACUUM DIODES

These new United Graphite Anode Diodes have been developed to fulfill the important aims of the Armed Services program for decreased size, increased ruggedness and increased reliability of Electron Tubes. Complete technical data sent on request.

Type 577

Max. Dimen.:
Height 7-3/8"
Diameter 2-1/16"

Ratings:

Ef	5.0 volts
If	10.25 amps.
epx	25 kv
Io	300 ma
Ib	1.50 amps.

Type 578

Max. Dimen.:
Height 6-1/2"
Diameter 2-5/16"

Ratings:

Ef	5.0 volts
If	6.0 amps.
epx	40 kv
Io	100 ma
Ib	750 ma

Type 576

Max. Dimen.:
Height 7-1/2"
Diameter 2-5/16"

Ratings:

Ef	5.0 volts
If	14.0 amps.
epx	25 kv
Io	500 ma
Ib	2.5 amps.



Type 371-B

Max. Dimen.:
Height 8-3/4"
Diameter 2-5/16"

Ratings:

Ef	5.0 volts
If	10.3 amps.
epx	25 kv
Io	300 ma
Ib	1.5 amps.

Type 3B24W

Max. Dimen.:
Height 6-1/2"
Diameter 1-9/16"

Ratings:

Ef	5.0 volts
If	3.0 amps.
epx	20 kv
Io	60 ma
Ib	300 ma

Type 3B29

Max. Dimen.:
Height 4-3/4"
Diameter 1-9/16"

Ratings:

Ef	2.5 volts
If	4.75 amps.
epx	16 kv
Io	65 ma
Ib	250 ma

UNITED SINCE 1934 ELECTRONICS, 42 Spring Street, Newark 2, N. J.

Save Time, Save Money . . . Use Rogan's Interchangeable

COMBINATION KNOBS

Wide Selection Available From Stock Molds . . . No Tool Charge . . . Fast Delivery

RB-1000 Escutcheon Branded



RB-1000 Used in Combination with RB-31 Knob

Write For New Bulletin 104 Showing How Rogan Knobs Can Help Solve Your Knob Problems

Illustration shows two of the many combination branded knobs from Rogan's huge selection. Available from stock with assorted markings readily adaptable to electronic and other related equipment. Can be furnished in matching or contrasting color combinations. Supplies from stock molds, no tool charge. Fast delivery, low cost. Send for complete details.

ROGAN BROTHERS 2504 IRVING PK. BLVD. CHICAGO, 18, ILLINOIS

Compression Molders and Branders of Plastics

New! Revolutionary!

Superspeed WHITE FLASH Activated ROSIN CORED SOLDER

SAVES TIME AND COSTS

SCIENTIFICALLY DESIGNED *to meet Modern Production Methods in the fields of*

Radio • Television • Telephone • Telecommunications • Railroad Signalling • Automotive Industries Can Manufacturing • Machinery • General Electrical Work Aeronautics and many others.

SAFE! SPEEDY!! EFFICIENT!!!

THE FLUTED CORE

—stellate in section—contains a fluxing medium of unrivaled efficiency close to periphery of the solder at six points. It permits instantaneous "wetting" and fluxing at correct temperature, and obviates dry and high resistance joints.

SUPERSPEED WHITE FLASH Activated Rosin Cored Solder comes in different diameters and alloys—YOU CAN SELECT THE SOLDER TO GIVE MAXIMUM EFFICIENCY AT THE CORRECT TEMPERATURE—FOR YOUR JOB—or—we make it to fit your requirements.

Check these Important Features:

- ★ Activated rosin flux insures maximum "wetting" and spreading
- ★ No dry or high resistance joints. No risk of corrosion.
- ★ Economical. Goes further. Gives more joints per pound of solder.
- ★ Faster. Operators solder more joints.
- ★ Cuts down rejects.
- ★ Non-hygroscopic residue of high dielectric strength.
- ★ No unpleasant odor.
- ★ Complete continuous core.

Write to our U. S. Representative for samples, technical literature, and prices. Stocks maintained in Rochester for immediate delivery to all points.

Manufactured Solely by H. J. ENTHOVEN & SONS LTD. LONDON, ENGLAND

U. S. Representative MAURICE H. ESSER Dept. A, 113 N. WATER STREET ROCHESTER 4, NEW YORK

PHYSICISTS
And
SENIOR RESEARCH ENGINEERS

• • •

POSITIONS NOW OPEN

• • •

Senior Engineers and Physicists having outstanding academic background and experience in the fields of:

- Microwave Techniques
- Moving Target Indication
- Servomechanisms
- Applied Physics
- Gyroscopic Equipment
- Optical Equipment
- Computers
- Pulse Techniques
- Radar
- Fire Control
- Circuit Analysis
- Autopilot Design
- Applied Mathematics
- Electronic Subminiaturization
- Instrument Design
- Automatic Production Equipment
- Test Equipment
- Electronic Design
- Flight Test Instrumentation

are offered excellent working conditions and opportunities for advancement in our Aerophysics Laboratory. Salaries are commensurate with ability, experience and background. Send information as to age, education, experience and work preference to:

NORTH AMERICAN AVIATION, INC.

Aerophysics Laboratory

Box No. K-4, 12214 S. Lakewood Blvd.

DOWNEY, CALIFORNIA

PRECISION FREQUENCIES

ACCURACY: 1 PART IN 100,000 (OR BETTER) .001%

FOR USE IN SUCH FIELDS AS

AVIATION
ASTRONOMY
BALLISTICS
HIGH-SPEED PHOTOGRAPHY
VISCOSITY MEASUREMENT
NUCLEAR PHYSICS
TELEMETERING
RADIATION COUNTING
FLUID FLOW
CHEMICAL REACTION
NAVIGATION
SCHOOL LABORATORIES
INDUSTRIAL RESEARCH LABS.
ACCURATE SPEED CONTROL

The controlling unit of these frequency standards is a bi-metallic fork, temperature-compensated and hermetically sealed against humidity and variations in barometric pressure. When combined with related equipment, accurate speed and time controls are afforded by mechanical, electrical, acoustical or optical means.

Instruments of our manufacture are used extensively by industry and government departments on such precision work as bomb sights and fire control.

Whatever your frequency problems may be, our engineers are ready to cooperate.

When requesting further details, please specify the Type Numbers on which information is desired.



TYPE 2001-2. BASIC UNIT
Frequencies, 200 to 1500 cycles. Dividers and Multipliers available for lower and higher frequencies. Miniaturized and JAN construction. Output, 6 volts.



TYPE 2005. UTILITY UNIT
consists of Type 2001-2 and booster to provide 10 watts at 110 V at 60 cyc. Input, 50-100 cyc.

TYPE 2121A. LAB. STANDARD
Outputs, 60 cycle, 0-110 Volts. 120-240 cycle impulses. Input, 50-400 cycles, 45 W.



TYPE 2111. POWER UNIT
50 W output. 0-110 V at 60 cyc. Input, 50-100 cyc., 275 W.

American Time Products, Inc.

580 Fifth Avenue *New York 19, N.Y.*

OPERATING UNDER PATENTS OF THE WESTERN ELECTRIC COMPANY

THE FIRST CHOICE OF RADIO ENGINEERS



FLEXIBILITY

In rack or console, or in its really portable cases, the Magnecorder will suit every purpose. PT6 Series shown is the most widely used professional tape recorder in the world, and is available with 3 speeds (3¾", 7½", 15") if preferred.

FIDELITY

Lifelike tone quality, low distortion meet N.A.B. standards — and at a moderate price! PT63 Series shown in rack mount also offers three heads to erase, record, and play back to monitor from the tape while recording.

FEATURES

PT7 accommodates 10½" reels and offers 3 heads, positive timing and pushbutton control. PT7 Series shown in complete console model is also available for portable or rack mount. For outstanding recording equipment, see the complete Magnecord line — PT6, PT63 and PT7.

Magnecord, INC.

360 NORTH MICHIGAN AVENUE
CHICAGO 1, ILLINOIS

WRITE FOR NEW CATALOG

Magnecord, Inc., Dept. EB-1
360 N. Michigan Ave., Chicago 1, Ill.
Send me latest catalog of Magnecord Equipment.

Name.....

Address.....

City.....Zone.....State.....

marriage; troubles with those who did not believe.

In the first half-century of any art or science as big as electronics there is bound to be much that is exciting, tawdry, good, bad, sad, joyous. Of all these, Doc had his share. But he always had hope. There is scarcely any technical phase of electronics in which de Forest did not make an important mark; and of the major aspects of electronics as we now know it, he was way out a head of the procession. His efforts to establish and maintain wireless telegraph systems here and abroad, his first use of the electric knife in surgery, his broadcasting of voice and music before the present brood of crooners began drooling, his early work with sound-on-film, the story of the telephone repeater, of electronic musical instruments and of much more —all this is in Doc's book in his own words.

From the nontechnical standpoint, de Forest's love of music, of poetry and of the classics or his prowess as a mountain climber may be news to those who know so well his technical deeds; but there is no doubt about the value of these extra-curricular activities to him.

To the end the "father of radio" believes that better service could have been made of at least one part of his contributions—broadcasting —and there are millions of former avid listeners who will agree with him.

This is an interesting and often inspiring story.—K.H.

High-Speed Computing Devices

BY THE STAFF OF ENGINEERING RESEARCH ASSOCIATES, INC., *including* C. B. TOMPKINS, J. H. WAKELIN AND W. W. STIFLER, JR. *McGraw-Hill Book Company, New York*, 1950, 451 *pages*, $6.50.

THIS BOOK is quite well written and should be of great interest to anyone concerned with computing machinery, particularly digital type computers. The material is presented in such a fashion that it could be successfully used as a first-course textbook for graduate students interested in digital computers. The basic fundamental concepts of machine computation are

DPi NOW OFFERS
a New Gauge for Highest Vacuum

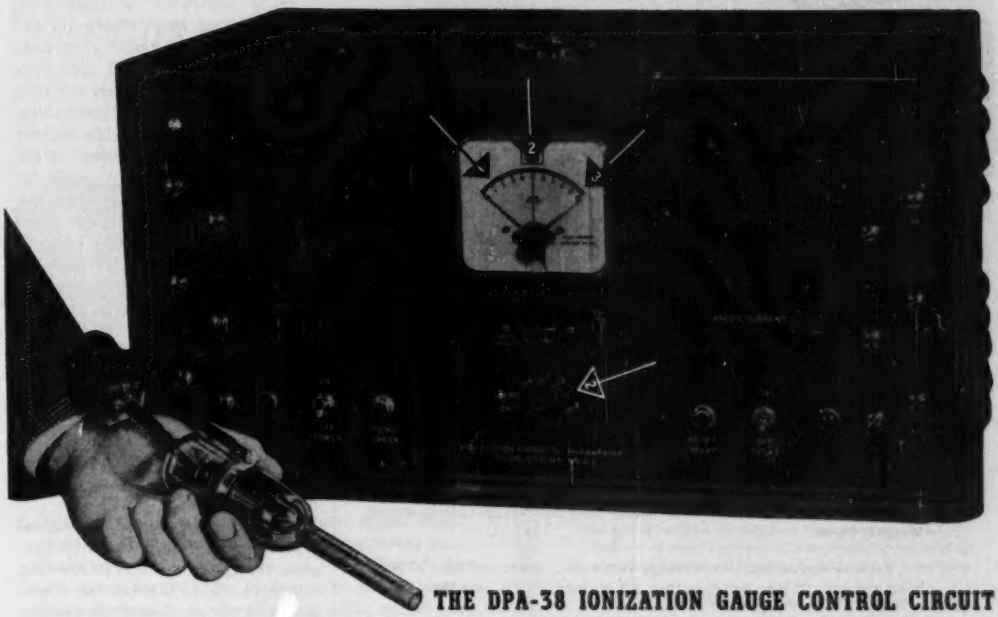

THE DPA-38 IONIZATION GAUGE CONTROL CIRCUIT BRINGS YOU 3 BIG NEW FEATURES



1. **Increased Sensitivity of the Circuit.** Now the lowest scale division represents 2 x 10^{-9} mm. Hg. The highest vacua can be easily and accurately measured, particularly the difficult range below 10^{-7} mm. Hg.

2. **New Direct-Reading Scale.** The negative exponent of the number of millimeters of mercury is read on the range selector and the coefficient is read on the dial gauge.

3. **Heavy-Duty Automatic Relay** protects maximum life of the VG-1A Ionization Gauge Tube. A contact point at the end of the needle swing automatically operates the relay to turn off the ionization tube filament and close an external circuit.

For prices or more complete information, write: ***Distillation Products Industries,*** Vacuum Equipment Department, 727 Ridge Road West, Rochester 3, N. Y. (Division of Eastman Kodak Company)

DPi

high vacuum research and engineering

Also . . . vitamins A and E . . . distilled monoglycerides . . . more than 8300 Eastman Organic Chemicals for science and industry

VARIAN MICROWAVE ENGINEERING

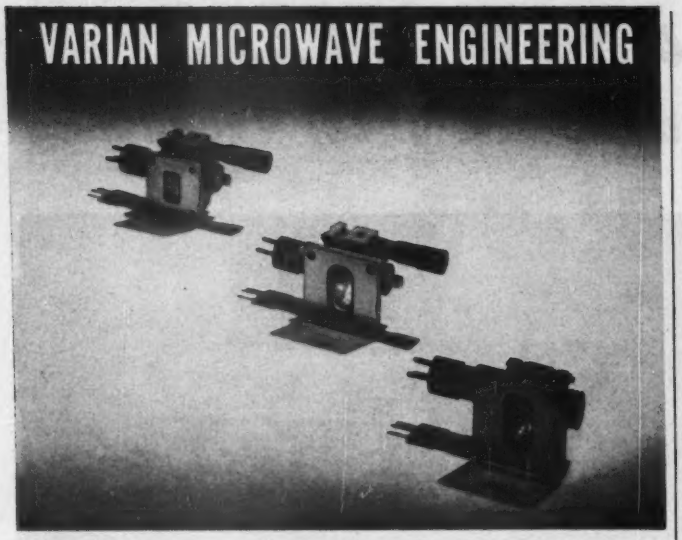

. . adds a new broadband waveguide-output klystron

Designed for high-power laboratory and antenna measurements as well as for use as a stable transmitter tube in fixed and mobile service, the new Varian X-21 Klystron covers the frequency range 9100 to 11,000 mc. It is illustrated at right above. The two resonant cavities are integral and have self-contained feedback. Output mates with standard UG/39U flange for ½- by 1- by 0.050-in. waveguide. Low microphonic construction. Weight, 4½ oz.

Typical Operation: Frequency, 10,000 mc; beam voltage, 1270 v; beam current, 98 ma; power output, 5.9 w; load VSWR, less than 1.1.

Two tunable waveguide-output reflex klystrons for the frequency range 8100 to 17,500 mc, the Varian X-12 and X-13, left and center in the illustration. Widely used for transmitter service and as local and bench oscillators as measurement power sources. Single screw tuners cover entire frequency ranges.

Typical Operation:	X-12	X-13
Frequency, mc	16,000	10,000
Beam Voltage	600	400
Beam Current, ma	50	48
Reflector Voltage	280	575
Power Output, mw	25	230
Load VSWR, max	1.1	1.1
Modulation Bandwidth, mc	50	30
Temperature Coefficient, mc per deg C, max	0.25	0.25

Now in production, two new klystrons for television service. Varian X-17 covers the range from 1990 to 2100 mc with 5 watts minimum power output. Varian X-26 Klystron group covers 5850 to 8200 mc with 0.5 watts minimum power output.

VARIAN associates

99 washington st.
san carlos, calif.

quite clearly presented. The authors have done a particularly good job in breaking down a complex subject into simple terms such that one with only a reasonable technical background will have no difficulty in following the material.

It is somewhat disappointing, however, that the authors did not include more information on analog-type computers. The book consists of seventeen chapters and only one is devoted to analog computers. Furthermore, most of this chapter deals with analog computers in the most general terms only. Some details of the differential analyzer are given but less than one page is devoted to the large, modern general-purpose analog computer such as the Anacom at Westinghouse and Northwestern University and the California Institute of Technology. There is no discussion of modern analog techniques nor of the basic procedures used to derive analogies. The bibliography on analog computers is incomplete. A number of the classic analog papers presented during the past 10 years are not mentioned.

For those interested in digital type computers only, the book presents much valuable and interesting material.—D. L. WHITEHEAD, *Engineer in Charge, Analog Computing Laboratory, Westinghouse Electric Corp.*

Industrial Instrumentation

BY DONALD P. ECKMAN. *John Wiley & Sons, Inc., New York,* 1950, 396 *pages,* $5.00.

AS AN introduction to the science of measurement for engineering undergraduates, this book reviews one by one the principles of various methods of measuring and sensing employed in industrial processing and manufacturing. Though emphasis is on the method rather than the mechanism, important practical details are stressed wherever possible.

Although electronic equipment is not specifically covered, practically all of the information in this book is essential for intelligent application of electronic controls in industry, since each control system must start with measurement of a variable. An appendix of tables,

Truarc E-Rings Improve Performance of Detachable Chain...5 ways!

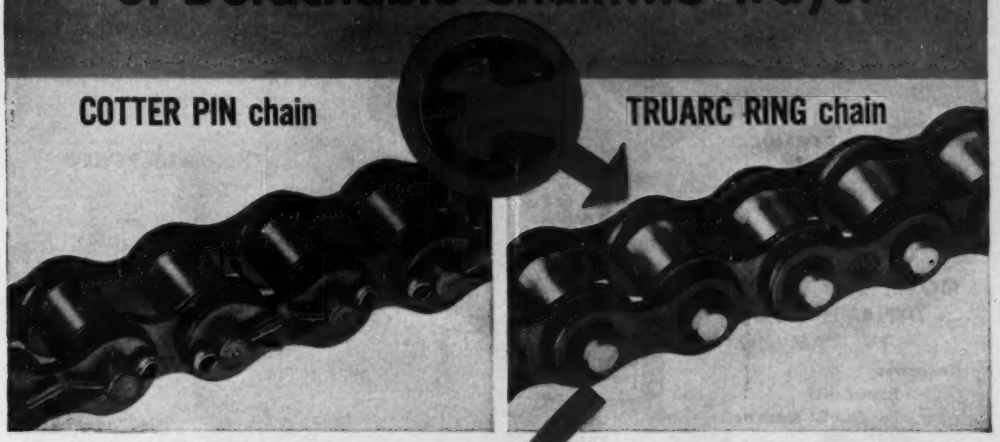

In every possible kind of test—tensile, impact, shock, speed—detachable chain made with Truarc Rings outperforms chain equipped with cotter pins! That's what Atlas Chain & Manufacturing Co., Philadelphia, discovered, after pioneering chain with Truarc E-Rings.

Improve your own product with Truarc Rings! Wherever you use machined shoulders, collars, cotter pins, bolts, nuts, screws, snap rings...a Truarc Ring will do the job better: improve performance, cut unit cost, save space and weight, eliminate parts, permit use of stock sizes, eliminate skilled labor operations, simplify maintenance.

Truarc Rings are precision-engineered. Quick and easy to assemble, disassemble. Give a never-failing grip. Can be used over and over again.

Find out what Truarc Rings can do for you. Send your blueprints to Waldes Truarc engineers, for individual attention, without obligation.

Waldes Truarc Retaining Rings are available for immediate delivery from leading ball bearing distributors throughout the country.

1. STRONGER. Average 30% higher *static thrust strength* than cotter pins. Resilient E-Ring reinforces links against exceptional *side stress*—resilient spring is most efficient means of damping vibration.

2. GREATER SHOCK RESISTANCE. Higher *shock strength ratios* than cotter pins, due to greater contact surface plus spring reaction for damping moment of shock. Circular movement of ring in groove relieves *shock surface loadings* —instead of resisting rigidly as with cotter pins in fixed holes.

3. HIGH SHOULDER. High effective bearing shoulder extends practically all around pin, and is geometrically perfectly proportioned to link diameter.

4. RE-USABLE. No part of E-Ring fatigues and breaks off, as with ends of re-used cotter pins. Ring removes easily with screwdriver.

5. REDUCES ACCIDENTS. Does not protrude to catch onto clothing. No sharp-pointed ends to produce electrical brush discharge and resultant fire and explosion hazard in mines and mills.

SEND FOR NEW CATALOG



WALDES

TRUARC

REG. U. S. PAT. OFF.

RETAINING RINGS

WALDES KOHINOOR, INC., LONG ISLAND CITY 1, NEW YORK

WALDES TRUARC RETAINING RINGS ARE PROTECTED BY THE FOLLOWING PATENT NUMBERS: U. S. PAT. 2,262,948; 2,420,921; 2,411,761; 2,407,903; 2,407,902; 2,401,308 AND OTHER PATS. PEND.

E-013

Waldes Kohinoor, Inc., 47-16 Austel Place
Long Island City 1, N. Y.

Please send selector guide catalog (4K-W) on Waldes Truarc Retaining Rings.

Name_____

Title_____

Company_____

Business Address_____

City_____ Zone_____ State_____

THE NEW
TURNER
Aristocrat

MODEL 50D DYNAMIC
FOR TV - AM - FM
Recording • Broadcast
Public Address

MODEL 50D
DYNAMIC FOR
TV - AM - FM
Recording
Broadcast
Public Address

The crown jewel of dynamic microphones. See it, handle it — use it on highest quality recording, public address or broadcast work. New beauty, new styling, new utility and *new performance* make the Turner *Aristocrat* the finest of the fine. Use it anywhere, indoors or out — in hand, on stand, suspended, or concealed in stage settings. The *Aristocrat* is quickly and easily detached from ball swivel coupler for hand use. Non-directional polar pattern picks up sound from any direction. Equally effective for individual or group pickups with wide range, high fidelity reproduction of voice or music. Its high output dynamic generator requires no closely associated auxiliary equipment for outstanding results. Built of finest materials with flawless workmanship, each unit is laboratory calibrated to insure specification standards. . . . Write for complete details.

SPECIFICATIONS

FREQUENCY RESPONSE: 50 to 15,000 c.p.s. flat within ± 2½ db.
OUTPUT LEVEL: 56 db below 1 volt/dyne/sq. cm.
IMPEDANCE: 15, 200, 500 ohms or high impedance.
POLAR PATTERN: Essentially non-directional in any position.
MOUNTING: Ball and swivel type, tilts in any direction. Standard ⅝" — 27 thread.
CABLE: 20 ft., high quality rubber covered, two conductor shielded cable with Cannon quick-disconnect plug.

THE TURNER COMPANY

905 17th Street N. E., • Cedar Rapids, Iowa
IN CANADA: Canadian Marconi Co., Montreal, P. Q., and Branches
EXPORT: Ad. Auriema Inc., 89 Broad Street, New York 4, N. Y.

TURNER *Microphones* BY TURNER

dealing mostly with temperature measurement since this is the commonest type of instrumentation, adds to the reference value of the book for all engineers. Questions and problems after each chapter add to the value as a text both for colleges and for home study.—J. M.

THUMBNAIL REVIEW

MAGNETIC RECORDING — 1900-1949. Bibliography Series No. 1, John Crerar Library, 86 E. Randolph, Chicago, 60 pages mimeographed, $2.00. Compiled by Carmen Wilson, chief, Technology Department, to meet requests for material on magnetic recording. References have been supplemented by descriptive annotation or abstract wherever titles were not selfexplanatory. References to outstanding patents are included. Arranged chronologically and cross-indexed by authors and by subjects.

RCA RECEIVING TUBE MANUAL RC-16. RCA Tube Department, Harrison, N. J., 320 pages, $.50. New edition covers over 460 receiving and picture tubes, brought up to date by revisions and expansions. Technical data sections include new material on calculation of power output, load resistance and distortion, cathode-follower data, and high-voltage and safety considerations for kinescopes. Many new audio amplifier and receiver circuit designs have been added.

NOMOGRAMS OF COMPLEX HYPERBOLIC FUNCTIONS. By Jorgen Rybner, Professor at Royal Technical University of Denmark. Available from Scandinavian Book Service, 620 W. 158th St., New York (in English), 1947, 35 pages plus charts and diagrams, $4.80. Large, accurately printed nomograms give accuracy comparable to 5-place tables and a computing machine. The charts present the sinh and cosh functions as rectangular functions of a rectangular variable, and the tanh function as a polar function of a rectangular variable. Additional material in the text makes it in some respects a compendium of transmission line and filter theory.

TABLE FOR USE IN THE ADDITION OF COMPLEX NUMBERS. By Jorgen Rybner and K. Steenberg Sorensen. Available from Scandinavian Book Service, 620 W. 158th St., New York (in English), 1948, 95 pages, $4.00. Facilitates calculations with complex numbers by making possible their addition or subtraction in polar form.

TELEVISION SERVICING. By W. H. Buchsbaum. Prentice-Hall, Inc., New York, 1950, 340 pages, $5.35. Written to aid in training technicians in television. Part I covers receiver theory; Part II deals with installation and alignment; Part III serves as a troubleshooting guide.

STRUCTURAL PLASTICS. By H. C. Engel, C. B. Hemming and H. R. Merriman. McGraw-Hill Book Co., New York, 1950, 301 pages, $4.50. First seven chapters deal largely with properties of plastics, molding procedures, sandwich constructions and structural adhesives, but the last chapter—Radomes and Microwave Windows—is definitely of interest to electronic engineers. This analyzes the broad problem of providing antenna covers, also called radomes and microwave windows, that are as transparent as possible to the radio waves they are designed to pass. Four basic radome solutions are presented—the thin wall, thick wall, double thin wall and sandwich, and a design procedure is given.

DESIGNER'S DILEMMA

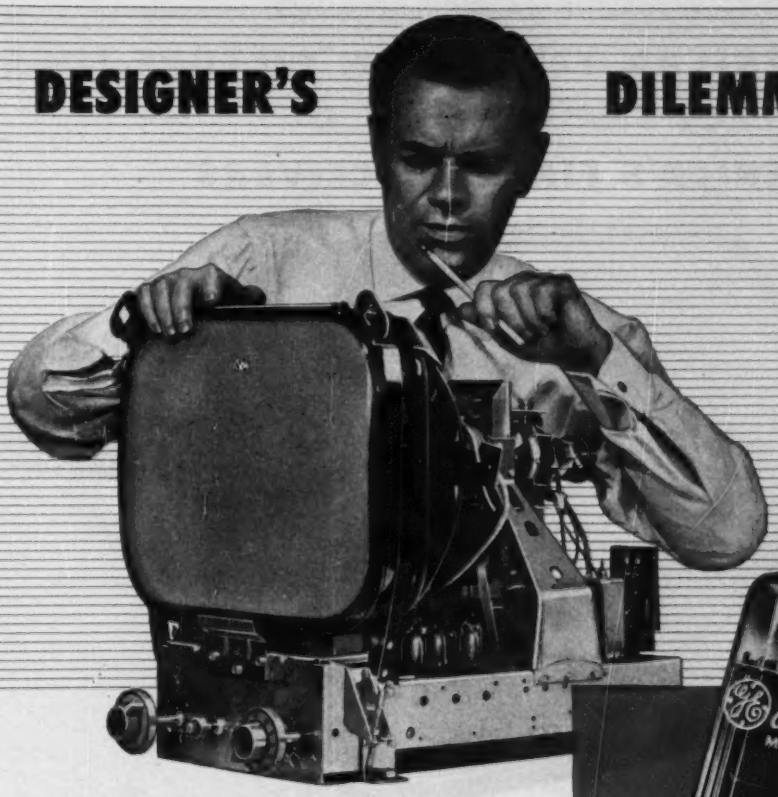

"How can I save, in order to trim the price of this set another $2.50?"

THE answer, Mr. TV-set Designer, is simple: *G.E.'s 6BN6 gated-beam tube.* It replaces three tubes and associated components, serving as a combined limiter, discriminator, and audio-amplifier.

6BN6 cost is right in line with other receiving types. You get three tubes' performance, yet you pay for only one!

Ask for Bulletin ET-B28, which tells the full story of this amazing G-E *economy* tube, also charts its performance. Or if you prefer to discuss the 6BN6 in person, an experienced G-E tube engineer gladly will call on you. Wire or write *Electronics Department, General Electric Company, Schenectady 5, New York.*

GENERAL ELECTRIC

AMERICAN TELEVISION PICTURE TUBES REFLECT THE QUALITY OF AMERICA'S FINEST RECEIVERS

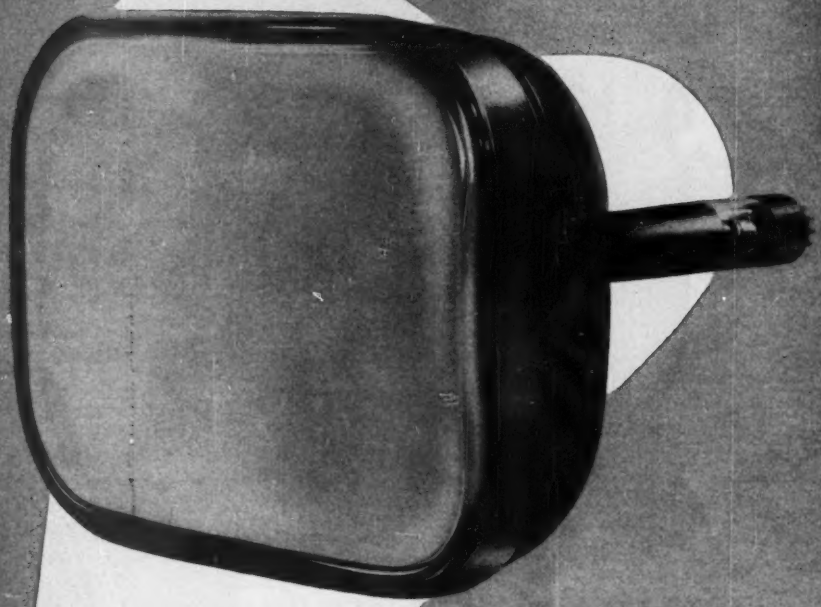

The history of the contributions of American Television engineers reads like the history of Television itself.

Our engineers are credited with hundreds of "Firsts"—the first amplifier tube, the first telecasting, the first interlaced scanning and, more recently, the first to develop the "Eyesaver" principle for picture screens—the high contrast, non-halation screen that has been widely adopted by the industry.

American Television is a "House of Fundamentals." Our "know-how" is constantly devoted to the further development of Television in all its phases.

The American Television Picture Tube is a great product of a great company. Make it your first choice—always!

AMERICAN TELEVISION, INC.

AMERICAN TELEVISION

520 PLYMOUTH CT., CHICAGO 5, ILL.

MANUFACTURING DIVISION

THE STORY OF AMERICAN TELEVISION IS THE HISTORY OF TELEVISION

(continued from p 122)

sufficient sensitivity and accuracy.

An amplifier was constructed using the circuit shown. The amplifier is designed for operation of a Weston model 370 a-c and d-c milliammeter, an instrument of the electrodynamometer type with a stated accuracy of ½ percent of full scale.

The amplifier is direct coupled throughout and makes operation possible on d-c as well as a-c. It maintains the combination useful as a transfer means between alternating and direct voltages.

The input voltage range of 1.5 to 300 v full scale is covered with a voltage divider made up of wire-wound precision resistors of 0.1 percent accuracy. The input resistance is 1,000 ohms per volt. For the ranges of 0.75 down to 0.15 volt full scale, reduced amounts of feedback are used with a fixed input resistance of 1,500 ohms.

The input voltage between grid and cathode of the first stage of amplification was measured as approximately 0.0039 v for full scale deflection of the milliammeter. For input voltage ranges of 1.5 to 300 v, the output of the voltage divider is 1.5 v. The feedback voltage is correspondingly about 1.496 v. The required feedback resistor is then $1.496/15 \times 10^{-3}$ or approximately 99.7 ohms. Accuracy of scale calibration thus depends mainly on the accuracy of adjustment of the feedback resistor. For a 0.15-v input, the feedback voltage is 38 times the net grid-cathode input voltage.

Advantages of D-C Coupling

The use of d-c coupling in a high-gain amplifier brings with it problems of drift and zero adjustment but much higher values of negative feedback are allowable. Elimination of coupling capacitors or transformers between stages prevents phase shifts giving sufficient positive feedback at certain frequencies to cause oscillation. The use of a large amount of negative feedback reduces drift and sensitivity to power supply variations to nearly a negligible amount. Some drift has been noticed during warmup on the lowest voltage ranges (where the feedback is reduced) but is easily compensated

For Accurate Inspection Of Difficult Shapes . The Kodak Contour Projector, Model 2 Shows...

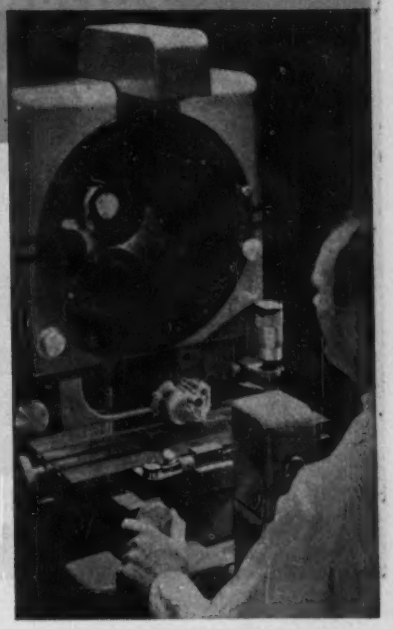

DEEP RECESSES

SURFACE DETAILS

CONTOURS

Few objects are too small or complicated for *complete* inspection under magnification with the Kodak Contour Projector. Deep recesses and surface details, *illuminated from the projection system itself,* stand out sharply and in natural color.

With unmatched versatility, it can be switched instantly from surface illumination to silhouette projection, or a combination of both. Any of six magnifications from 10× to 100× is available at the turn of a dial *without refocusing.* Your operator can work rapidly and efficiently, unhampered by the usual hoods or curtains.

Large parts? Sure! With a full 8″ between lens and object and 6¾″ from object to lamphouse at *all magnifications,* there's plenty of room. The lamphouse pivots to accommodate long parts. And the stage has 4″ of easy, precise travel, vertically and horizontally.

If you have an inspection or measuring problem where speed, accuracy, and convenience are important, it will pay you to investigate the Kodak Contour Projector. The coupon below will bring you a new booklet giving detailed information.

EASTMAN KODAK COMPANY 48
Industrial Optical Sales Division
Rochester 4, N. Y.

Please send your booklet on the Kodak Contour Projector.

NAME_____
(Please print)

COMPANY_____

ADDRESS_____

CITY_____ ZONE_____

STATE_____

Kodak
TRADE-MARK

MINIATURE RELAYS FOR AVIATION'S TOUGHEST JOBS

Multipole Types, Too!

In addition to the single-pole units illustrated, Struthers-Dunn produces these hermetically-sealed aviation relays in types up to 6 poles and having the same exacting characteristics.

These little hermetically-sealed d-c relays are specifically designed for aviation conditions involving high shock and vibration, elevated temperatures and high altitudes. A completely new magnet structure permits greatly reduced size with improved dependability. Three available types are for operation up to +85°C., +160°C. and +200°C. respectively, thus matching specific aviation service requirements. Write for S-D Data Bulletin 2410.

STRUTHERS-DUNN

5,348 RELAY TYPES

STRUTHERS-DUNN, INC., 150 N. 13th ST., PHILADELPHIA 7, PA.

BALTIMORE • BOSTON • BUFFALO • CHARLOTTE • CHICAGO • CINCINNATI
CLEVELAND • DALLAS • DETROIT • KANSAS CITY • LOS ANGELES
MINNEAPOLIS • MONTREAL • NEW ORLEANS • NEW YORK • PITTSBURGH
ST. LOUIS • SAN FRANCISCO • SEATTLE • SYRACUSE • TORONTO



Amplifier and electrodynamometer-type milliammeter set up for operation

by the zero adjustment shown.

Regulated power supplies were found advantageous for stabilizing the low input voltage ranges and for maintaining high accuracy for either polarity of d-c input voltage. A high degree of regulation is not required, but an improvement over the natural power supply regulation (for d-c input voltages and corresponding plate current changes) and changes due to a-c line voltage variations is desirable.

A troublesome problem in the initial development of the amplifier was the effect of conductive grid current in the first stage. With low plate and grid bias voltages, a small but significant grid current may flow because of ionized gas in the tube or the initial velocity of electrons emitted from the cathode. This effect varies with electrode voltages, heater temperature, and the particular tube of a given type.

A current of 1 μa flowing through the 1,500-ohm grid to cathode voltage-divider resistance would cause an error in the input voltage of 0.1 percent. It is important to keep the plate potential of the first stage high enough to maintain the grid current at a low value, even at the expense of loss of gain in a voltage divider to supply the grid of the next stage.

The inherent gain of the amplifier is so great that it is difficult to adjust without feedback. However, by adjusting one or two stages independently, finding proper input and output d-c potentials, and then connecting all stages together along with the feedback loop, correct operation may be obtained.

Performance and Applications

The combination described may be used also to measure current in

Through this portal pass the nation's top stars

All in a Day's Work—Chemical Laboratory continually samples raw materials; checks and controls quality from suppliers.



Sized and Shaped for TV—Hundreds of tubular parts are produced by Superior from WELDRAWN Type 305 (18-12) stainless steel.

● You may not recognize the object pictured above. It is the first grid cylinder for a cathode ray tube gun structure, photographed from an unusual angle. The hole is only .040" in diameter —and the grid itself is deep drawn in one piece to save unnecessary welding and assembly operations by TV tube manufacturers.

This is tubing technology in operation. It is an example of Superior's superiority in electronic research, production know-how and facilities, and metallurgy. It is one product of hundreds pioneered for the electronic industry by Superior.

You may already be one of our valued customers and friends —nearly all electronic manufacturers are. If small Seamless or †WELDRAWN tubing can help anywhere in your product Superior can help you. To find out how, write Superior Tube Company, 2500 Germantown Avenue, Norristown, Pennsylvania.

Space and Time—188,000 square feet—over 4 acres—for developing, producing, and testing small tubing . . . plenty of space . . . and people who take time to give you a good product and good service.

Which Is The Better For Your Product . . .

SEAMLESS . . . ? The finest tubes that can be made. Standard production is .010" to .121" O.D. inclusive, with wall thicknesses of .0015" to .005". Cathodes with larger diameters and heavier walls will be produced to customer specification.

Or LOCKSEAM* . . . ? Produced directly from thin nickel alloy strip stock, .040" to .100" O.D. in standard length range of 11.5 mm to 42 mm. Round, rectangular or oval, cut to specified lengths, beaded or plain.

†REG. U. S. TRADEMARK—SUPERIOR TUBE COMPANY
*MFD. UNDER U. S. PATS. SUPERIOR TUBE COMPANY

Superior
THE BIG NAME IN SMALL TUBING
All analyses .010" to ⅜" O.D.
Certain analyses (.035" max. wall) Up to 1¾" O.D.

Electronic Products for export through Driver-Harris Company, Harrison, New Jersey • Harrison 6-4800

QUICK SERVICE FROM STOCK

CHICAGO

JAN-T-27
Hermetically Sealed Transformers

A Complete Range of Hermetically Sealed Units

for prototype electronic equipment and pilot runs

- **POWER TRANSFORMERS** FOR CAPACITOR AND REACTOR INPUT SYSTEMS
- **BIAS TRANSFORMERS**
- **FILAMENT TRANSFORMERS**
- **FILTER REACTORS**
- **AUDIO TRANSFORMERS** IN 3 RANGES: FULL FREQUENCY PUBLIC ADDRESS & COMMUNICATIONS



THEY'RE AVAILABLE FOR TODAY'S IMPORTANT NEED. CHICAGO Hermetically Sealed Transformers meet all requirements of Grade I, JAN-T-27 specifications for Class A operation. Designed expressly to fill transformer requirements for military airborne, marine, and ground communication equipment, as well as for use in tropical and sub-zero climates. Ideal for a wide range of application, particularly in research and development work, prototype equipment and pilot runs. The complete range of CHICAGO JAN-T-27 units is available for *quick shipment from stock.*

Meets JAN-T-27 Specifications

1. Alternately heated and chilled for 20 cycles (20 days) temperature range from +65°C to −10°C, 90% humidity. Also tested for 5 cycles from −55°C to +85°C.
2. Immersed in hot and cold brine at temperatures of 75°C to 0°C.
3. Subjected to severe vibration on shake table for 20 periods of 15 minutes each.
4. Given a pull test on all terminals, from all directions, of 5 lbs. or more for 30-second intervals.
5. Tested on each winding at twice rated a-c voltage and frequency.
6. Tested for insulation resistance in excess of 500 megohms throughout heat-and-cold cycles.
7. Tested for corona discharge at voltages 1¼ times operating voltage of transformers.
8. Capable of operation in 65°C ambient temperature with temperature rise not exceeding 40°C.
9. Operated 48 hours with 12% overload at rated ambient temperature.

SEND FOR IT

NEW EQUIPMENT TRANSFORMER CATALOG

Have the full details at your finger-tips on CHICAGO'S *New Equipment Line*—covering all JAN-T-27 units as well as famous Sealed-in-Steel transformers engineered for every application and geared to today's circuit requirements. Write for your free copy of this important catalog today, or get it from your distributor.

CHICAGO TRANSFORMER

DIVISION OF ESSEX WIRE CORPORATION

3501 ADDISON STREET • CHICAGO 18, ILLINOIS

CHICAGO TRANSFORMER — TRADE MARK REG.

a shunt. The 0.15-v range is particularly useful in this case.

Another possible application is in the measurement of low values of power. Provided a non-inductive resistor is used for feedback, the large amount of feedback employed insures a very accurate phase relation between input voltage and output current. Amplifiers of this type might be used to drive potential, current, or both circuits of electrodynamometer voltmeters to measure accurately very small amounts of power.

Amplifiers of this type may be used to drive thermal instruments. The attendant advantages may be increased sensitivity and a much wider input current or voltage range than generally available in a single instrument.

Several particularly useful applications of this type of amplifier to the measurement of slowly varying or sub-power-frequency quantities have come to the author's attention. Since the amplifier is d-c coupled, it has no low frequency limit.

Wien Bridge as Frequency-Shift Servo

By Jack Yeiser

Field Engineer
Philco Corporation
Philadelphia, Pa.

Use of a Wien bridge as a frequency discriminator in servo applications makes it possible to employ a standard two-gang variable capacitor as the rebalance element. The low inertia of the capacitor as compared to moving-iron or slide-wire elements results in rapid response of the system.

The instrument was constructed as a recording frequency meter for the purpose of recording telemetered information appearing as an audio tone with frequency varying between 45 and 150 cycles. Sensing is provided by taking advantage of the 180-degree phase shift which occurs as the bridge passes through a null.

A breadboard assembly was used with two standard 12-watt public-address amplifiers corrected for

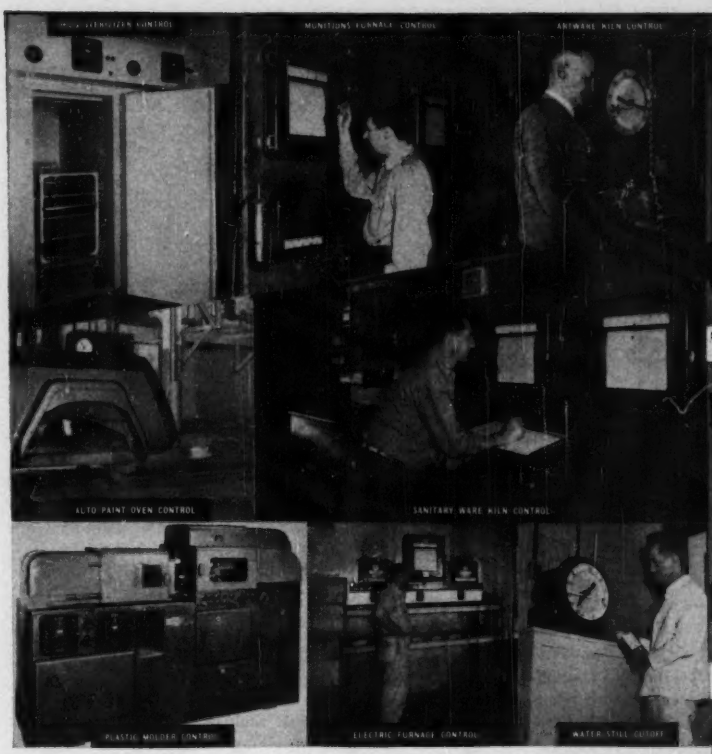



SPEEDOMAX (OR MICROMAX) STRIP-CHART ON-OFF CONTROLLER



SPEEDOMAX ROUND-CHART ON-OFF CONTROLLER



MICROMAX MODEL C ON-OFF CONTROLLER



ELECTROMAX ON-OFF CONTROLLER

Dependable "ON-OFF" Controllers for Industry

THE kind of control instrument which industry calls on-off or 2-position is not only the oldest form of automatic regulator, but is one which many manufacturers still use, instead of more advanced types, for simple requirements. Usually, the instrument merely closes the valve when temperature reaches the control point, and opens valve again when temperature falls below point. The question of whether such on-off action is best for the given case can of course be settled by using the instrument with the best, most useful features. Here are some which L&N On-Off Controllers offer:

1. Instruments may be Recording Controllers with either strip-chart or round-chart, or Controllers with no charts at all.
2. Instruments can operate at high or moderate speed; can be located regardless of machine vibration, building tremors or distance from process.
3. Controls are outstandingly dependable because they "balance" temperature against a standard. Intermediate bearings and springs cannot increase, decrease or otherwise influence accuracy or sensitivity.
4. Low maintenance assured by machine-like design and construction.
5. More than 1000 standard ranges. Specials are available, but seldom needed.

Tell us your problem and we will send further information. Write either to our nearest office or to 4979 Stenton Avenue, Philadelphia 44, Pa.

MEASURING INSTRUMENTS · TELEMETERS · AUTOMATIC CONTROLS · HEAT-TREATING FURNACES

LEEDS & NORTHRUP CO.

THESE instruments are fully automatic; need no standardizing; are ideal even for hard-to-get-at or difficult locations.

Jrl. Ad ND4-33(3)

with WORKSHOP parabolic antennas

A well-known western railroad anticipates very substantial savings on over 100 telephone lines to be replaced with a microwave system using Workshop parabolic antennas. This is consistent with the performance of many other installations where WORKSHOP parabolics are used.

The Workshop is the only organization which offers a complete production and engineering service on parabolic antennas. Our wide range of types, sizes and focal lengths meet all the requirements of: — (1) Multi-Channel Communication Point-to-Point Relay — (2) Television and Facsimile Relay — (3) TV, FM and AM Studio-to-Transmitter Link.

PARABOLAS — Precision-formed aluminum reflectors.

MOUNTINGS — Various types of aluminum reinforced mountings can be supplied with all antennas.

R. F. COMPONENTS — Precision machined and heavily silver plated. Critical elements protected by low-loss plastic radome.

PATTERN and IMPEDANCE DATA — A series of elaborate measurements of both pattern and impedance are made to adjust the settings for optimum performance.

POLARIZATION — Either vertical or horizontal polarization can be obtained easily by a simple adjustment at the rear of the reflector.

ENGINEERING and CONTRACT SERVICE — If your product or service requires high-frequency antennas, get in touch with the WORKSHOP. As the pioneer and acknowledged leader in this field, we can help you. Be it research, design, test, or production, our highly-skilled staff, backed by the finest laboratory equipment in the industry, can solve your antenna problem with a minimum of time and expense. Write, or phone Needham 3-0005. No obligation.

OTHER WORKSHOP ANTENNAS

Aeronautical Ground Station
For aircraft communications — omnidirectional.

Directional and Bi-Directional
For police, highway patrol, railway, forestry, utilities, oil fields.

Beacon
For fire, police, taxicab, and private fleet communications.

TV, FM and Amateur

The WORKSHOP ASSOCIATES, Inc.

Specialists in High Frequency Antennas

135 Crescent Road, Needham Heights 94, Massachusetts



Broadboard assembly for Wien bridge used as a frequency discriminator in a servo system

zero phase shift employed as servo amplifiers. The input grid resistor of the bridge amplifier is disconnected to prevent bridge unbalance. Transformer T_1 is a balanced shielded type with a one-to-one ratio and zero phase shift over the range of frequencies employed. Balance resistor R_1 is adjusted for best null.

Oil dashpot damping is used and overshoot is negligible for full pen deflection on a 3-inch strip chart with 5-cps excursions.

The Wien bridge follow-up circuit could also prove useful as the receiving servo in radio control systems. The accuracy and stability of the bridge make its use as an accurate frequency meter promising.

TV Receiving Antenna Measurements

By Kendrick H. Lippitt
Chief Engineer
Technical Appliance Corp.
Sherburne, N. Y.

TECHNICAL information regarding antenna arrays is needlessly confused by the maze of conflicting performance figures published by some manufacturers.

Measurements made on television receiving antennas using the system of the Technical Appliance Corp. result in a gain figure which takes into consideration not only the true gain of the antenna but also the mismatch loss which occurs into a 300-ohm load.

In this system, the voltage developed across the terminals of a folded dipole terminated in a 300-ohm load is compared with the voltage developed across the terminals

NORTH RELAYS

simple · sturdy

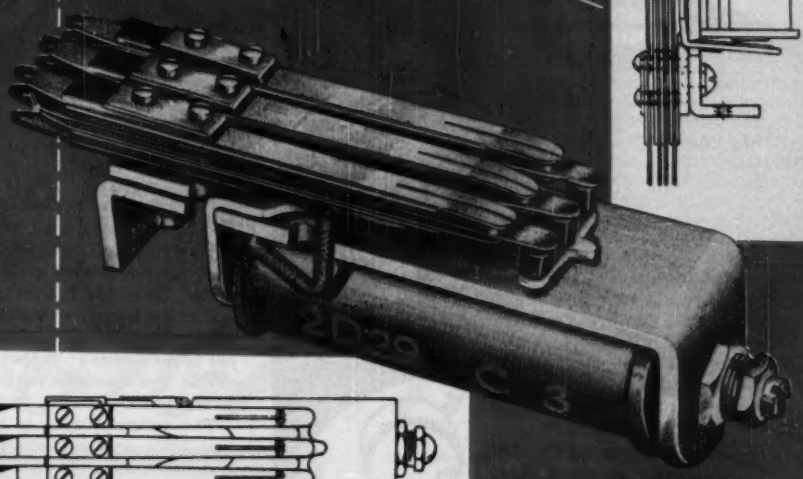

reliable · efficient

BECAUSE their basic principle is so simple, it's easy to believe that anyone can make relays. But, where dependability, reliability and efficiency are specified, such belief leads to certain disappointment.

If you are designing circuits requiring absolute quality, with zero failure, you must have relays backed by years of experience and a very special know-how. North Relays have just such backing. We've been in the business since 1884, engineering and producing millions of relays, from multiples to midgets, from simple single-makes to intricate pileups with any combination of makes and breaks.

BUY NORTH for insurance on critical relay circuits.

SPECIAL RELAYS? Let North Engineer Them For You

THE NORTH ELECTRIC MANUFACTURING COMPANY

1429 South Market Street, Galion, Ohio, U. S. A.

Originators of ALL RELAY Systems of Automatic Switching

Look to Permoflux
for the NEWEST...FINEST...MOST SENSATIONAL
AUDIO COMPONENTS

Newest!
MINIATURES AND SUBMINIATURES

The MRB-3 miniature dynamic receiver and microphone has excellent wide-range frequency response characteristics, maintained flat by the Patented Permoflux acoustical damping method. Utilizes a self-formed voice coil. Sensitivity—115 db on 6 ft. coupler with 1 m w input. Overall diameter 1" — height 7/16". Can be supplied with miniature input or output transformers in any impedance.

T1 and T2 Transformers and Chokes—These subminiature units provide power efficiency from 80-90% with high voltage breakdown characteristics and extremely low susceptibility to electrolytic deterioration. Frequency response is ±2 db from 100 to 8000~. Impedances up to 200,000 ohms and windings with inductive reactances up to one megohm. Ideal for use with Permoflux microphone-receiver units and headsets.


Model MRB-3


Model T1

Model T2

Finest!
STANDARD
HIGH FIDELITY
SUPER HIGH FIDELITY
DYNAMIC HEADPHONES

are world famous and quality-recognized products of Permoflux Corp. Sturdy and comfortable, they are built to withstand excessive shock, high humidities and a wide range of temperatures without impairing their high efficiency and dependable performance. Patented acoustical damping provides a flat frequency response to 4500~ in standard models and through 10,000~ in Super High Fidelity models. Unparalled in performance for broadcast studio, aviation, laboratory, and audiometer work.

DHS-17
CAA Approved

Most Sensational!
ROYAL EIGHT"
Compares with any 12" speaker

This average laboratory response curve of the Permoflux 8T-8-1 proves that it compares with the finest speakers regardless of size or price.

8T-8-1
Eight-Inch
Speaker
with the
Blue Cone

PERM-O-FLUX
"SOUND IN DESIGN"
PERMOFLUX CORPORATION
4900 W GRAND AVE CHICAGO 39 ILL • 236 S VERDUGO RD GLENDALE 5 CALIF

All-channel type transmitting antenna in test position

of the antenna array being tested, also terminated in a 300-ohm load.

Thirty feet of standard 300-ohm twin-lead line connect the standard folded dipole and the array under test to the measuring voltmeter. A plug arrangement is used at the input to the voltmeter so that neither of the two transmission lines can be connected.

The voltmeter used is an RCA type 301B, a high-frequency field-intensity meter. It has a linear measuring system and is sufficiently stable for gain measurements. The input circuit of the meter was designed to have an impedance of 300 ohms by means of a General Radio bridge, type 916A, and a standing-wave line. For channels 7 to 13 special equipment was built with linear scales.

The zone in which the array is placed for measurement and the half-wave dipole used for reference are not subject to exactly the same signal intensity. Therefore, a television program can not be used to measure the gain of an antenna array because the 6-mc signal level changes as picture detail varies.

A signal generator with stable output connected to an all-channel-type transmitting antenna is the best source of signal for this type of measurement. It is tunable to any frequency within its range and sends out a signal with a narrow bandwidth. In this way the performance of the antenna over the 6-mc band or over a series of bands

THIS GEM-SIZED UNIT DOES A GIGANTIC JOB



CM-15 MINIATURE CAPACITOR

Actual Size 9/32" x 1/2" x 3/16"
For Television, Radio and other Electronic Applications.
2 to 420 mmf. cap. at 500v DCw.
2 to 525 mmf. cap. at 300v DCw.
Temp. Co-efficient ± 50 parts per million per degree C for most capacity values.
6-dot color coded.

Each tiny El-Menco CM-15 capacitor performs at maximum efficiency regardless of climate or critical operating conditions. Before leaving the factory, it is tested for dielectric strength at *double* working voltage—for insulation resistance and capacity value. Every gem-sized El-Menco capacitor meets and beats the strictest Army-Navy standards. That's why *you* can always depend on this tiny condenser to give gigantic performance in your product.

A COMPLETE LINE OF CAPACITORS TO MEET EVERY REQUIREMENT

THE ELECTRO MOTIVE MFG. CO., Inc.
WILLIMANTIC CONNECTICUT

Write on your firm letterhead for Catalog and Samples.

MOLDED MICA **El-Menco** MICA TRIMMER
CAPACITORS

FOREIGN RADIO AND ELECTRONIC MANUFACTURERS COMMUNICATE DIRECT WITH OUR EXPORT DEPT. AT WILLIMANTIC, CONN. FOR INFORMATION.

ARCO ELECTRONICS, INC. 103 Lafayette St., New York, N. Y.—Sole Agent for Jobbers and Distributors in U. S. and Canada

because the "arch" is stronger

Extra strength to withstand electrical and mechanical strain . . . that's why Ward Leonard's STRIPOHM resistors are made with the broad sides *arched* instead of flat.

This hump-backed shape also gives you (1) more even and uniform winding because the wire *hugs* the core, (2) greater area for heat dissipation. Low mounting brackets and terminal arrangement facilitate multiple stacking.

Write for Bulletin 23. WARD LEONARD ELECTRIC COMPANY, 31 South Street, Mount Vernon, N. Y. Offices in principal cities of U. S. and Canada.

WARD LEONARD
ELECTRIC COMPANY
Result-Engineered Controls
RESISTORS • RHEOSTATS • RELAYS • CONTROL DEVICES

may be probed at many points.

Constant field intensity must be obtained in the zone in which the antennas under test are located. Vertical rather than horizontal polarization reduces any discrepancy to a small figure. With vertical polarization, the mutual loading of ground on the antenna is negligible if the antenna is vertical to ground. If an array is horizontal, the mutual coupling may cause a significant change in the operating impedance of the array.

Test Method

In order that the standard reference folded-dipole antenna is in exactly the same field as the antenna under test, the two antennas are placed on a T mast which is rotated to measure front and back ratios of both antennas.

In the gain measurement procedure, the signal generator is tuned to the frequency desired and allowed to stabilize. Next, the antenna array is plugged into the voltmeter and the meter tuned to the frequency of the signal generator and allowed to stabilize. The antenna array is then rotated to the forward position of the T mast and the meter reading recorded.

Finally, the transmission line from the reference folded dipole is plugged into the measuring voltmeter in place of the line from the antenna array without retuning the signal generator or the meter. The reference folded dipole is then



Field house with mast and long horizontal crossarm forming a T. The two antennas are vertically polarized. The height above ground of the two bays is identical and the signals will be nearly identical at each stack

Try Your Luck In Untried Pools!

...You may Land a Big One that you never counted on

You may get a strike that will amaze you . . . and your customers, too. You may net a whopper that will weigh up to be *the biggest sales advantage your product ever had*... the hidden ability to count to your customers' advantage. Like the milling machine builder who found he could build-in a Veeder-Root Counter to pre-set and control depth of cut.

And on such fishing expeditions, V-R engineers are expert (and remarkably successful) guides. When do you want to try *your* luck? Just write.

Series 1200 Magnetic Counters (for AC & DC), widely used with photo-electric relays or electric-eye equipment. These and scores of other electrical and mechanical counters are shown in FREE 8-page "COUNT BOOK" below. Send for your copy, *today*.

Veeder-Root COUNTERS

"Count Everything on Earth"

VEEDER-ROOT INC., HARTFORD 2, CONN.

Veeder-Root Inc., Hartford 2, Conn., (NEW Telephone Number: HArtford 7-7201)

In Canada: Veeder-Root of Canada, Ltd., 955 St. James Street, Montreal 3
In Great Britain: Veeder-Root Ltd., Kilspindie Rd., Dundee, Scotland

DON'T LET U.S.A.F.
No. 41065-B
GET YOU DOWN, BILL... TAKE IT TO TENNEY

This Tenney Variable Temperature—Humidity Chamber was built to run high temperature, humidity, and mildew-resistance tests (Groups 10, 30 & 70) on aircraft electronic equipment and components under 41065-B. Specified range from 60° F. to 200° F. Relative humidity 20% to 95%. Sizes from 3 cu. ft. to walk-in rooms.

"Take it to Tenney" is sound advice when you're faced with a testing problem. For years Tenney has specialized in designing and building testing equipment to meet the strictest specifications for sand and dust, low temperature, high altitude, liquid immersion, salt spray and many other conditions. Absolutely accurate simulation of changing conditions can be obtained through the use of Tenney program control apparatus. Tenney engineers are always available for consultation and help. You need only ask for their assistance. *For literature and further information write Tenney Engineering, Inc., Dept. A, 26 Avenue B, Newark 5, New Jersey.*

Tenney

Engineers and Manufacturers of Automatic Temperature, Humidity and Pressure Control Equipment

7183



Maximum gain obtainable from antenna arrays with various numbers of half-wave elements. For example, a four-element array is capable of producing a maximum power gain of 5 or a voltage gain of 2.3 which is 7-db gain over a half-wave dipole

swung into the position previously occupied by the antenna array and the meter reading recorded.

With single-channel type antennas, such as Yagi antennas, it is possible to estimate the maximum gain obtainable from any type array made up of half-wave elements. The chart shown gives the maximum gain available from antenna arrays with various numbers of half-wave elements.

For the same total transmitting power, the power in a single half-wave dipole antenna is twice that in each dipole of an antenna made up of two half-wave dipoles. If the power is cut in half the field produced by the antenna is reduced to 0.707 times its previous value. Therefore, if the voltage from the two half-wave dipoles adds up in phase, 1.4, a 3-db gain is obtained over a single dipole antenna.

In the chart the gain of two elements over one is given as four rather than three db. This improvement is produced by a change in the current distribution on the antenna elements. When elements are spaced close together, as in the conventional Yagi, the current distribution is not sinusoidal. For this same reason, top loading of transmitting antennas is justified where the current distribution is changed to increase the transmitted signal.

The justification for the remainder of the chart follows from the previous reasoning. When the power is divided into two similar antennas, the gain is increased

TREMENDOUS PLASTICS MOLDING CAPACITY—

to serve your needs!

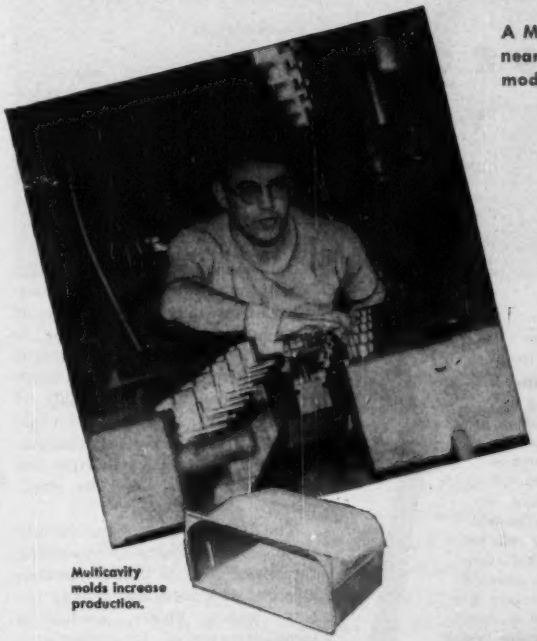

Multicavity molds increase production.

A MILLION-DOLLAR expansion program is now nearing completion at General Electric's modern plastics molding plant at Taunton, Mass.

With expanded plant facilities to serve you in the Midwest and in the East, General Electric now provides a plastics molding service that offers you many important advantages.

Quick Delivery! New automatic presses and equipment capable of handling the biggest jobs combine to give you *fast delivery*.

Economical Production! Modern plant layout and the latest equipment can cut costs on large-volume runs.

General Electric's 56 years of experience as one of the world's largest plastics molders means you get the benefit of sound and tested designing, engineering, and molding "know-how." You can depend on G.E. for a plastics service that may substantially reduce your costs or improve your product. Write us for further details.

Write on your company letterhead for the interesting booklet, **"Your Plastics Dollars Worth."** Address: Section Y4, General Electric Company, 1 Plastics Avenue, Pittsfield, Mass.

ECONOMICAL BIG-VOLUME JOBS—like the refrigerator snack box, camera case, and juicer bowl pictured here—are the specialty of General Electric's molding service.



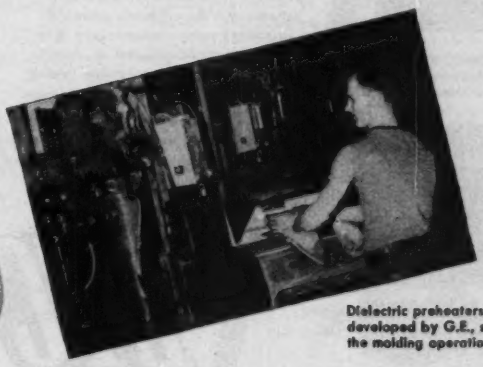

Dielectric preheaters, developed by G.E., speed the molding operation.

You can put your confidence in

GENERAL ELECTRIC

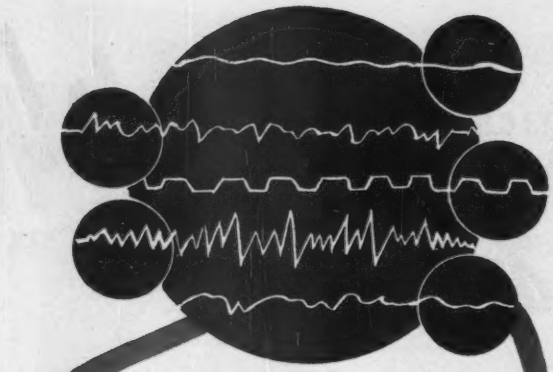

THE OSCILLOSCOPE CAN *Fool* YOU!

It's no mean trick to keep an eye on 2, 4 or more oscilloscopes for simultaneous comparison. Worse yet may be the successive use of a single 'scope for the one-at-a-time study of different transients that should be compared simultaneously under identical conditions.

ETC Multi-Channel Oscilloscopes reduce these problems to their simplest form—by combining a number of wave forms on a single tube. Whether in equipment or material testing; in electroencephalography, neurophysiology or other medical research; in the field of explosives; in seismography or geology or in other critical applications it is thus entirely practical, infinitely more convenient and often far more accurate to observe different transients under exactly the same conditions or stimulus.

In addition to standard 2-, 4-, 5- and 8-channel 'scopes, ETC produces many special adaptations for specific uses.



4-CHANNEL OSCILLOSCOPE, TYPE H-43. For recording through continuous strip cameras.

UNIVERSAL DUAL CHANNEL OSCILLOSCOPE, TYPE H-22. Plug-in a-c or d-c amplifiers. Registers from DC to 1 megacycle.

ETC

electronic tube corporation

PHILADELPHIA 18, PENNSYLVANIA

three db over one single antenna.

Over a period of two and one-half years more than 1,000 different antenna arrays have been measured using this technique, from single half-wave dipoles to arrays of sixteen elements. During this period the chart has been accurate and satisfactory.

Radioactivity in Textile Production

A COTTON mill in Lancashire, England, is testing the use of radioactivity to measure the uniformity of slivers (pronounced slyvers in the cotton industry). Slivers are strands or slender rolls of cotton in an untwisted state produced by a carding machine and used to produce cotton yarns.

In the manufacture of yarns, the textile spinner has to pass the constituent threads through a series of doubling operations in order to even out any irregularities. This is a costly process and involves much work and handling of materials. If the uniformity of the sliver could be measured quickly and continuously in a uniform condition the doubling process could be eliminated.

The first step towards uniformity is an accurate means of measuring the sliver. This is difficult because sliver is of a loose and spongy nature which makes mechanical means impractical. By employing a beta-ray thickness gage, in which sliver is interposed between a radioactive isotope source and an ionization chamber, a means for obtaining an accurate measurement is available.

The sliver passing through the path of the rays absorbs some of them and the amount reaching the ionization chamber can be measured in terms of the sliver thickness. The ionization current developed is extremely small but can be amplified and used to operate an indicating instrument or recorder scaled in degrees of thickness or weight per unit length. If necessary, the current can be further amplified and used to operate a

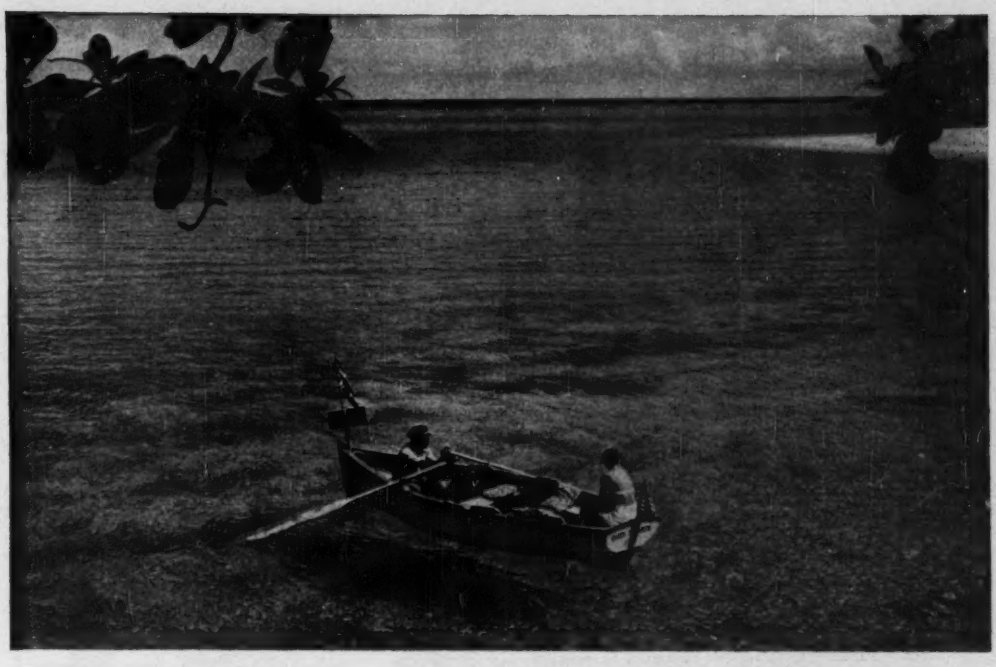

Photo by Earl Leaf from Guillumette

out deep . . . *it's different*

Too bad all the ocean isn't this clear. There'd be no need for complicated under-water detection equipment, no need for constant research and development of depth-finding instruments and sonar equipment such as Edo engineers are working on now.

But as long as the ocean depths can hide their secrets, we'll need better and better eyes and ears with which to see and hear — electronically — what's below. Much is being pioneered along these lines at Edo.

Already Edo equipment, designed and manufactured for the U.S. Navy, makes possible new accuracy in under-water detection techniques.

WHO IS EDO?

Twenty five years of research, development and manufacturing experience are behind Edo's work in the electronic field. Founded in 1925, the company first built seaplane floats, later expanded to the design and manufacture of marine aircraft, and built various aircraft components in great quantity during the war. Now to this intimate knowledge of aviation, has been combined top engineering and manufacturing talent in the field of electronics for the design and production of various types of under-water detection equipment.

For a complete picture of Edo's first quarter of a century send for your copy of "Edo's 25th Anniversary" brochure by writing to the Edo Corporation, Dept. M-1, College Point, N.Y.

Edo

EDO CORPORATION · COLLEGE POINT, N. Y.

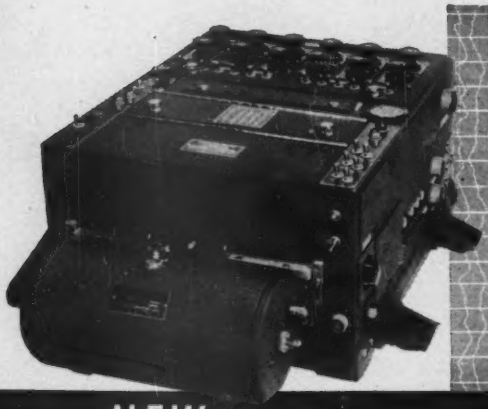

the *NEW* S-8 Oscillograph

Here, in a versatile instrument of advanced design, are all the things you need for complete oscillographic recording. The Hathaway Type S-8 Oscillograph, which has long been the standard of oscillographic recording, has been improved to meet the rapidly expanding demands of modern research. Whether your measurement problems are simple or complex, the NEW Type S-8 Oscillograph has the inherent capabilities necessary to measure vibration, pressure, acceleration, and strain with new ease and accuracy.

The newest features include:

QUICK-CHANGE TRANSMISSION *fully enclosed with gears running in oil* to provide instantaneous selection of 16 record speeds over the range of 120:1

CHART TRAVEL INDICATOR provides continuous indication of chart motion. Operator knows instantly by flashing lamp if anything should happen to interfere with chart motion

FULL-RESILIENT MOUNTING FOR MOTOR AND TRANSMISSION isolates all possible vibration and makes possible the use of modern super-sensitive galvanometers

NEW GALVANOMETER STAGE accommodates *all* Hathaway galvanometer for recording milliamperes, microamperes, or watts

NEW RECORD-LENGTH CONTROL AND NUMBERING SYSTEM designed for long, trouble-free service under all kinds of ambient conditions

All the other valuable features are retained, such as

PRECISION TUNING-FORK-CONTROLLED TIMING SYSTEM produces either 1/10-second or 1/100-second time lines across sheet

WIDE RANGE OF GALVANOMETER TYPES AND CHARACTERISTICS provide for almost any recording requirements. Natural frequencies to 10,000 cps. Sensitivities to 50,000 mm per ma, single and polyphase watts

DAYLIGHT LOADING AND UNLOADING RECORDS TO 200 FT. IN LENGTH, width to 10 inches

SIMULTANEOUS VIEWING AND RECORDING

AUTOMATIC BRILLIANCY CONTROL

12 TO 92 ELEMENTS

Whatever your needs may be, investigate the NEW Type S-8 Oscillograph and its 170 types of galvanometers — the most versatile equipment in existence for general-purpose applications.

WRITE FOR BULLETIN 281-A-G

Hathaway
INSTRUMENT COMPANY
1315 SO. CLARKSON STREET • DENVER 10, COLORADO

servo which will correct any deviation from the desired value.

The advantage of this new method of measuring sliver uniformity is that it enables accurate measurement to be made without physical contact with the material under examination.

Precision VR Tube Tester

WHEN an unusually constant voltage is desired, careful selection of VR tubes is necessary as these tubes vary noticeably in their operating characteristics. A simple circuit for predetermining the reliability of VR tube performance is shown in the diagram.

Ideally, the voltage drop across the VR tube is constant throughout its rated current range; however, many tubes do not give a uniform



Circuit for testing VR tube over its operating current range

regulating characteristic. Small transients caused by line variations or other reasons result in changes in voltage drop across the tube with consequent changes in regulated output. These results are virtually independent of tube age, and new tubes are sometimes among the worst offenders.

Thus to test VR tubes properly, it is necessary to examine each tube over its entire operating current range, while employing a sensitive detecting device to indicate voltage variations.

The tube selector circuit has been developed by O. B. Rudolph and described in *Rev. Sci. Inst.*, May, 1950. By throwing the switch to position 2, a well-filtered d-c output

they may look alike, *but:* there is only one C-D

THE STANDARD IN THE FIELD OF HIGH POWER OSCILLATORS

type 80 series

C-D HIGH POWER MICA TRANSMITTER CAPACITORS

Typical of the many C-D firsts are the type 50 mica capacitors. Only C-D micas can point to a record of dependable service of over forty years. Here's why:

Series mica stack—C-D first to use and patent this construction. Affords uniform voltage gradient!

Radio-ray mica—Sheets individually tested for uniform thickness and dielectric strength!

Special exclusive high melting point low loss filler—Reduces stray field losses; protects against humidity!

Vacuum impregnated assembly—Assures high insulation resistance; low losses; eliminates air voids!

High pressure laminated end stacks—Results in high Q, good capacity stability.

Cast-aluminum end caps—low resistance, wide path, positive contact terminals for series, parallel or series-parallel connection. Speedy, space-conserving installations!

Every unit tested under long, continuous overload—Assures maximum reliable service.

Type 50 capacitors are available in all commercial capacity and voltage ratings. For complete description of these and Paradon type transmitting capacitors, write for catalog. CORNELL-DUBILIER ELECTRIC CORPORATION, Dept. K-11 South Plainfield, New Jersey. Other plants in New Bedford, Brookline and Worcester, Mass.; Providence, R. I.; Indianapolis, Ind., and subsidiary, The Radiart Corp., Cleveland, Ohio.

C-D Best by Field Test!

CONSISTENTLY DEPENDABLE

CORNELL-DUBILIER

CAPACITORS · VIBRATORS · ANTENNAS · CONVERTERS

Leach RELAYS
ARE PERFORMANCE PROVED!

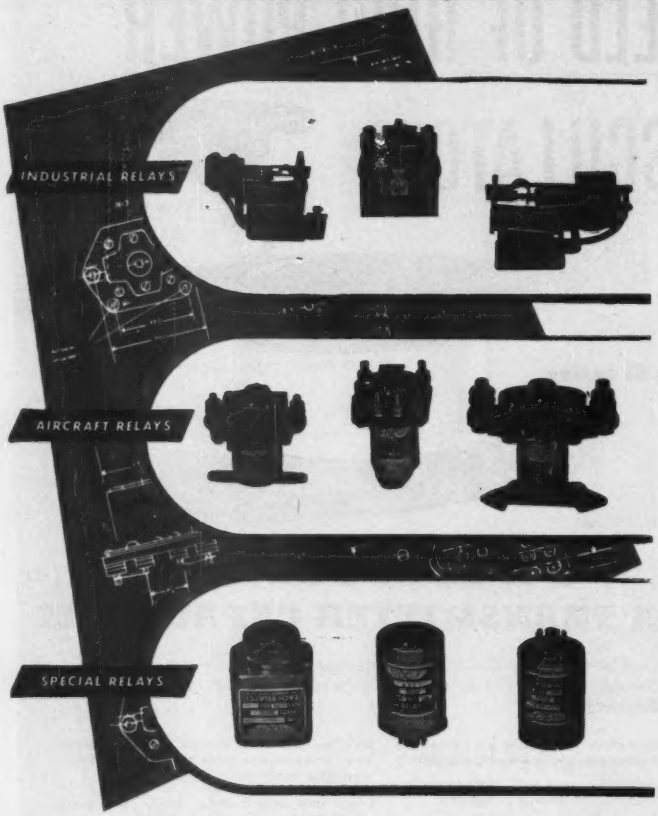

You get better service from LEACH RELAYS because thousands of types of relays for thousands of applications have been proved-in-use for over 30 years.

LEACH RELAYS are designed with an exceptionally high factor of safety for *extra* dependability. Simplicity of designs makes installation quick, easy and inexpensive. Get *all* the facts and make your own comparisons. LEACH RELAYS' outstanding performance, reliability, sturdiness and economy have been *proved-in-use.*

Highest standards of engineering, materials and workmanship assure long, safe, efficient, trouble-free service.

FOR BETTER CONTROLS THROUGH BETTER RELAYS—*CONTACT LEACH*

LEACH RELAY CO.

5915 AVALON BOULEVARD, ★ LOS ANGELES 3, CALIF.

Representatives in Principal Cities of U. S. and Canada

will be obtained which can be used for preheating the tube undergoing test if desired and also for checking firing voltage which will be indicated on the voltmeter. With the switch in position 1, pulsating d-c voltage will be applied to the tube for precision checking of the overall voltage-current characteristic. The milliammeter indicates rms current and care should be exercised to prevent the peak value of the current from exceeding 40 ma.

Shown in the illustration are three of the various types of oscilloscope traces which have been obtained from different tubes. The trace at left is ideal and the only one acceptable for many applications.

Television Electronic Pointer

A METHOD for pointing out a person or item in a television picture by means of an electronic pointer has been developed by the General Electric Company.

The new device enables a narrator or commentator to insert a black or white pointer about thirty lines high and seven lines wide at any point in the tv picture.

The equipment consists of a rack-mounted chassis and a simple control unit, a device similar to the control stick of an airplane. A toggle switch selects either a black or white pointer.

The signal input is a noncom-

Operator shown positioning a white pointer by means of the control lever



BRIDGEPORT BRASS COMPANY

COPPER ALLOY BULLETIN

"Bridgeport" BRASS CO. MILLS IN BRIDGEPORT, CONN. AND INDIANAPOLIS, IND.—IN CANADA: NORANDA COPPER AND BRASS LIMITED, MONTREAL

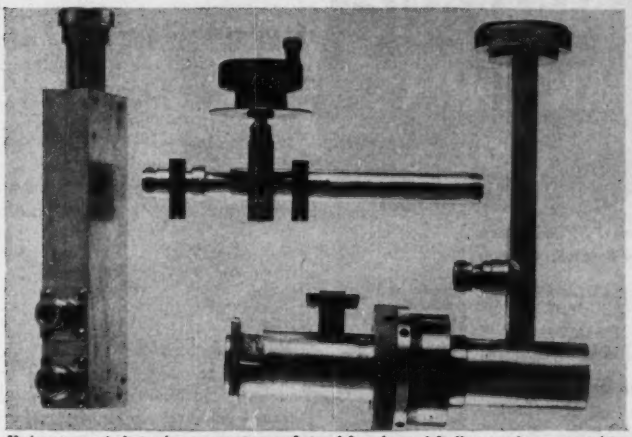

Various types of electronic components manufactured from brass: left, line stretcher; center, piston-type, cutoff attenuator; right, rotating joint. Diamond Manufacturing Co., Wakefield, Mass.

Accuracy of Electronic Components Increased by Brass and Bronze

Copper-base alloys in rod, strip, sheet, wire and tube form are the backbone of the manufacture of electronic components such as crystal mixers, attenuators, rotating joints, line stretchers, antennas, R. F. coaxial connectors and numerous other items.

Accurate dimensions and highly polished surfaces are essential for microwave test equipment and plumbing components. Copper alloys can be both machined or drawn to these exacting demands.

Plating Essential

All parts are either silver or gold plated for electrical conductivity and protection from corrosion. The majority of the copper alloys can be plated cleanly and with a minimum of work. They hold their plate for long periods of time without scaling.

All types of machining operations are necessary in producing this precision equipment. For example, the illustrated line stretcher is made up of a number of screw machine parts from free turning brass rod. The body is also rectangular rod of the same alloy. Drilling, tapping, milling, polishing, plating, silver soldering are involved in producing this component.

Any type of corrosion changes the electrical characteristics of these units. Brass and bronze are both resistant to atmospheric corrosion. Some of these units are used in the open, especially those linking up antennas and in radar and other communication equipment.

Close Fits Needed

On sliding parts and mating surfaces used as bearings, the parts must be fitted closely enough to eliminate any play which would affect the characteristics of the unit. This is also true of mating threads.

Spring contact units are made from phosphor bronze, grade A, to reduce wear and fatigue dangers.

Since plating is essential for protection purposes, mating parts in tubular construction are sometimes plated with nickel and chrome to obtain a better bearing with the silver plated part through the difference in the coefficient of friction.

Brass Smooths Action of Resistor

Smooth action, ability to withstand wear and corrosion in all types of weather conditions, are essential in variable resistance units used in television, radio and other electronic work.

Copper-base alloys answer these demands. Through the excellent machinability of free cutting brass rod, the threaded guide bushing can be held accurately to take the shaft with a minimum of play. At the same time the leaded brass makes a good bearing surface for smooth action.

The bushing plate is leaded clock brass (62.25% copper, 2% lead and the remainder zinc). Clean blanking and piercing are possible with this alloy and in hard temper it has a tensile strength better than 70,000 psi.

Copper soldering terminal lugs are used both for conductivity and ease of tinning, and they are held into the body with hollow rivets made from cartridge brass, which has high ductility.

Both spring contact terminals, one which rides on the carbon impregnated resistance strip and the other against it, are made from phosphor bronze grade A (95% copper, 5% tin). This alloy has excellent spring characteristics and great resistance to fatigue from constant flexing.

A fixed pressure of the contact must be maintained on the resistance strip to insure a good electrical connection. Variations in this pressure would seriously affect the operation of the television, radio and similar electronic devices.

The shaft is also of free-cutting brass rod which simplifies the machining and the milling of the flat and tangs. (6154)



Variable resistor and component parts used in electronic work — Courtesy Clarostat Mfg. Co., Inc., Dover, N. H.

WHAT ARE *Your* REQUIREMENTS IN PARABOLIC ANTENNAS ?

For microwave systems . . . check these advantages of ANDREW Parabolic Antennas:

- ☐ **DEPENDABILITY** — *An actual record of 100% dependability.* There has *never* been a single mechanical or electrical failure on an ANDREW Parabolic Antenna . . . anywhere in the world.
- ☐ **COST** — Exceptionally low; made possible by high production.
- ☐ **LIGHT WEIGHT — HIGH STRENGTH** — Achieved by spun aluminum reflectors braced by formed steel struts.
- ☐ **ADJUSTABLE MOUNTING** — Through ± 10 degrees in azimuth and elevation.
- ☐ **DEICING KITS** — Thermostatically controlled, available where required.
- ☐ **CABLE** — 7/8" air dielectric Teflon insulated cable. Radiator is pressure tight. Fittings for solid dielectric cables also available.

SPECIFICATIONS

Frequency Range	...890-960 MCS...				...1750-2110 MCS...			
Type Number	1002	1004	1006	1010	2002	2004	2006	2010
Diameter of Parabola feet	2	4	6	10	2	4	6	10
Gain Over Half Wave Dipole Decibels	10	15	20	25	15	20	25	29
Beam Width, Half Power Points, Degrees	36°	22°	16°	11°	18°	10°	7°	5°
Net Weight, Pounds	10	64	150	380	10	65	150	380
Thrust Due to Wind Loading at 30 Pounds/FT Pounds	127	509	1145	3200	127	509	1145	3200

Andrew CORPORATION
363 EAST 75th STREET • CHICAGO 19

Your antenna problems can best be solved by ANDREW—the largest firm of antenna equipment specialists in the world. Write today.

ANDREW

WORLD'S LARGEST ANTENNA EQUIPMENT SPECIALISTS

TRANSMISSION LINES FOR AM-FM-TV • ANTENNAS • DIRECTIONAL ANTENNA EQUIPMENT
ANTENNA TUNING UNITS • TOWER LIGHTING EQUIPMENT



Block diagram for the circuit enabling a black or white pointer to be inserted in the tv picture

posite black-negative video, 0.5 to 2 volts peak to peak and 75 ohms. The separate sync signal is negative, 3 to 8 volts and of high impedance.

Batch Integrator

A NEW batch-type integrator accurately establishes a predetermined quantity of fluid by making or breaking an electrical contact when the desired amount or batch has been integrated.

The control function is accomplished by using a photoelectric pickup unit that responds to reflections of a light beam from a multiface mirror mounted on the rotating integrator shaft and an electric predetermined reset counter. The counter may be set for any desired quantity or batch of fluid.

The electric counter is set for the desired quantity and the process started by depressing the momentary contact button which energizes the pump circuit or other apparatus



Working drawing of the batch integrator control

HOW SELETRON RECTIFIERS GAVE CHICAGO A LIFT

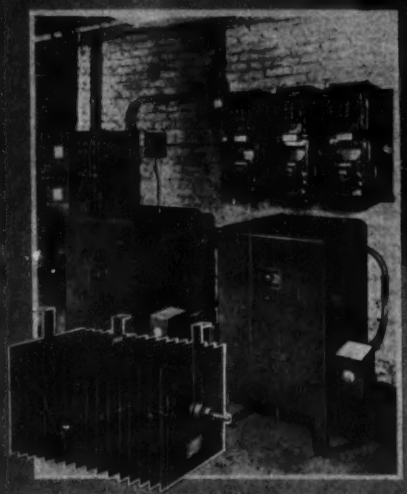

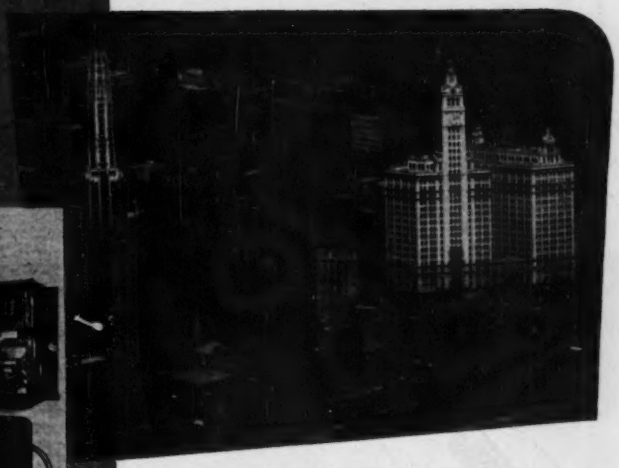

PARTIAL LIST OF ELEVATOR INSTALLATIONS USING SELETRON RECTIFIERS IN THE CHICAGO AREA

BUILDING	NO. OF RECTIFIERS	APPROX. NO. OF ELEVATORS
Drake Hotel Towers, 179 E. Lake Shore Dr.	4 ea. 25 KW	8
General City Plating, 1750 N. Ashland Ave.	2 ea. 40 KW	2
Jewish Charities, 241 S. Wells	2 ea. 20 KW	3
1360 North Dearborn Building	3 ea. 27½ KW	6
60 E. Grant Street Building	2 ea. 14 KW	2
Bernatin Building, 16 E. Clinton	2 ea. 10 KW	2
Beth Temple, 800 North State	2 ea. 20 KW	3
Clinton Realty, 5226 S. Clinton	2 ea. 20 KW 1 ea. 14 KW 1 ea. 15 KW	4
Lansing Hotel, 1036 N. Dearborn	2 ea. 20 KW	2
Plaza Hotel, 1359 N. Clark	3 ea. 10 KW	3
Sears & Roebuck Co., 312 N. Hoy	3 ea. 25 KW	2
Covenant Club, 10 North Dearborn	2 ea. 20 KW	3
Churchill Apts., 1261 North State	2 ea. 17 KW	2
Western Elec. Bldg., 1706 s. Wabash	2 ea. 10 KW	2
28 East Cedar	2 ea. 14 KW	3
Michael Reese Hospital	4 ea. 50 KW	10
Stateway Drug Bldg.	3 ea. 10 KW	3
Granite Arts Bldg.	4 ea. 25 KW	6
Walton Motors	2 ea. 30 KW	2
Chicagoan Hotel	3 ea. 27½ KW	6
1300 North State Building	2 ea. 40 KW	4
Canterbury Apts.	3 ea. 14 KW	3
341 Van Buren Street Building	3 ea. 20 KW	5
Superior Elevator Co.	1 ea. 7 KW	1
242 E. Walton Building	1 ea. 7 KW	1
Canton Machine Co.	3 ea. 10 KW	2
Western Electric Building	3 ea. 20 KW 2 ea. 14 KW 2 ea. 10 KW	9
Gazette Drug Company	2 ea. 10 KW	1
S. Calvert Building	3 ea. 14 KW	4
Salesberry Furniture Company	1 ea. 10 KW	1
210 E. Pearson Street Building	3 ea. 20 KW	4
Illinois Electrotype	1 ea. 20 KW	2
Our Savings Company	4 ea. 20 KW	6
[illegible]	4 ea. 25 KW	5
Stanton Hotel	1 ea. 20 KW	1

WHEN THE POWER COMPANY changed over to alternating current in certain Chicago areas it meant that existing elevators operating on D.C. had to be converted fast, or the good people of the town would be "grounded."

Ther Electric & Machine Works of Chicago solved elevator rectification problems for considerably more than 100 famous buildings in the Windy City by designing complete power supply and regenerative braking equipment employing SELETRON rectifiers. The illustration shows a typical 3 bank unit with regenerative control, built for the Clinton Realty Co.

Of course, elevator operation is but one of many uses for SELETRON. These rugged, efficient selenium rectifiers are versatile – useful in hundreds of varying industrial applications for economical conversion of alternating current to D.C.

Your *own* rectification problems may easily be solved by SELETRON engineers. Write us now describing them – and request our new Bulletin No. ES-35

Seletron

SELETRON DIVISION

RADIO RECEPTOR COMPANY, INC.

Since 1922 in Radio and Electronics

Sales Dept: 251 West 19th St., New York 11, N. Y.

Factory: 84 North 9th St., Brooklyn 11, N. Y.

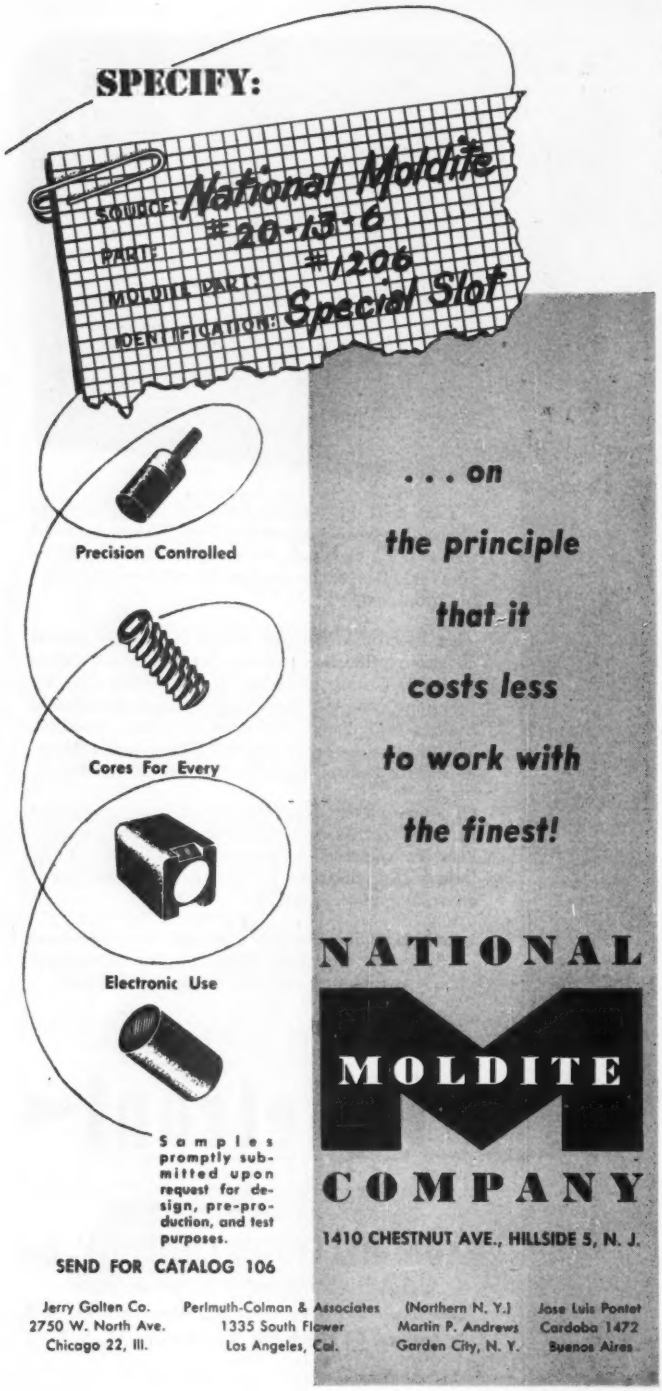
SPECIFY:
SOURCE: National Moldite
PART #: 20-15-6
MOLDITE PART #: 1206
IDENTIFICATION: Special Slot
Precision Controlled
Cores For Every
Electronic Use
Samples promptly submitted upon request for design, pre-production, and test purposes.
SEND FOR CATALOG 106
. . . on the principle that it costs less to work with the finest!
NATIONAL
MOLDITE
COMPANY
1410 CHESTNUT AVE., HILLSIDE 5, N. J.
Jerry Golten Co. 2750 W. North Ave. Chicago 22, Ill.
Perlmuth-Colman & Associates 1335 South Flower Los Angeles, Cal.
(Northern N. Y.) Martin P. Andrews Garden City, N. Y.
Jose Luis Pontet Cardoba 1472 Buenos Aires

that starts the flow of fluid.

An electric meter measures the flow and supplies a proportional current to the watt-hour type of continuous electric integrator. Speed of rotation of the integrator shaft is a direct measure of the rate of flow. Each revolution corresponds to a definite quantity of flow.

The counting is done by the photoelectric cell picking up the number of reflections of the light source from the rotating multiface mirror. As soon as the desired batch has been integrated the pump circuit is deenergized by the counter which then automatically resets itself. The process may then be repeated for the same batch or a new batch setting.

The electric counter will register up to 150 counts per minute. The maximum speed of the revolving integrator shaft, corresponding to maximum flow, is 25 rpm.

For a given calibration of the integrator, the range of batch control is varied by changing the number of faces (from one to six) of the revolving mirror. The instrument is manufactured by the Republic Flow Meters Co. of Chicago, Ill.

Novel Application for Neon Diodes

By Irving Gottlieb
Electrical Engineer
Los Angeles, California

A NEON BULB, connected as a relaxation oscillator, will function as a light-sensitive device, the response being a change in frequency when the illumination is changed. This phenomenon is ordinarily of no significance with respect to the



The luminous gas which uniformly surrounds the negative electrode before application of heat gradually collects as a brilliant ball of glowing gas in the end region of the electrodes

Another reason why your telephone gives so much for so little

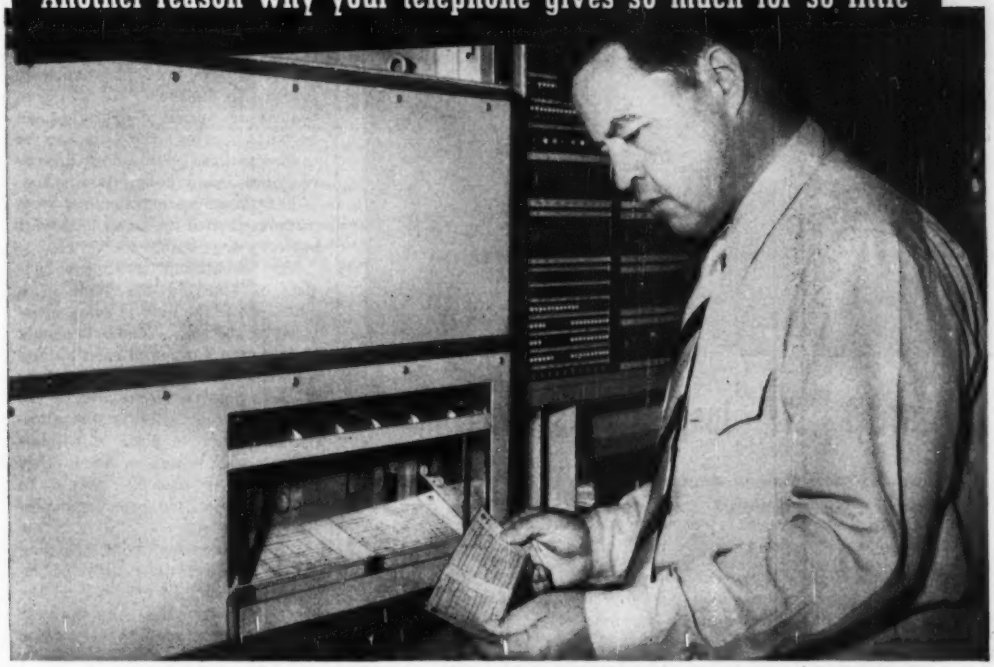

Studying punched card record of dial system operation. Each card (top) can report 1080 items

In a large, modern dial telephone office, 2,000,000 switch contacts await the orders of your dial—and 10,000 of them may be needed to clear a path for your voice when you make a single telephone call. Within this maze of signal paths, faults—though infrequent—must be detected and fixed before they can impair telephone service.

The latest system developed by Bell Telephone Laboratories automatically detects its own faults, detours calls around them without delay—then makes out a "written" report on what happened.

The fault may be a broken wire, or a high resistance caused by specks of dirt on switch contacts. In one second, the trouble recorder punches out a card, noting in detail the circuits involved and the stage in the switching operation where the fault appeared.

Maintenance men examine the reports at intervals and learn what needs attention. Between times they go about their own duties in keeping service moving.

This is another example of how research at Bell Laboratories helps your telephone system operate at top efficiency, so the cost to you stays low.

BELL TELEPHONE LABORATORIES

WORKING CONTINUALLY TO KEEP YOUR TELEPHONE SERVICE BIG IN VALUE AND LOW IN COST.

PRESTO...*most carefully made recording discs in the world*

step 4 - Inspection is important

Surface reflections in a recording disc can tell more than volumes to the skilled eye. That's why no mechanical test has ever replaced the examination of each PRESTO disc by trained inspectors.

Under a bank of fluorescent lamps diffused by a special glass screen, discs are slowly rotated. A ripple, a fleck in the brilliant surface automatically grades the disc. Only those passing the most critical surface test are allowed to carry the PRESTO "Green Label."

Rigid inspection of discs is further insurance that your instantaneous or master recording will produce full tonal quality, that it will react properly under recording, processing and playback conditions. This important fourth step in the manufacture of PRESTOS is another reason why they are known throughout the world as the most carefully-made, most permanent, best performing discs available.



The famous PRESTO "Green Label" . . . world's finest recording disc.

PRESTO
RECORDING CORPORATION
Paramus, New Jersey
Mailing Address:
Box 500, Hackensack, New Jersey

In Canada:
Walter P. Downs, Ltd.
Dominion Sq. Bldg.
Montreal, Canada

Overseas:
M. Simons & Son Co., Inc.
25 Warren Street
New York, New York

usual applications of relaxation oscillators and escapes observation.

Interesting experiments can be conducted to detect frequency changes under various conditions of exposure to light. This little-known cause and effect relationship can be greatly enhanced by means of a "treatment", the result being a photoelectric transponder which behaves in an unusual and fascinating manner.

It will be shown that a neon bulb can be caused to flash during exposure to light but will be entirely inactive in darkness. In addition, the converse mode of operation can be demonstrated; the bulb can be caused to flash in the dark and be rendered inactive by illumination.

The foregoing experiments were performed with the small 1/25-watt butterfly-type bulb.

The sensitizing treatment consists of applying the flame of a match while the bulb is being energized by 135 volts. The bulb should be held in a horizontal position and the flame should be restricted as much as possible to the area of the glass immediately below the glowing electrode. A piece of window glass, a wire screen, or some other precautionary measure should be used to protect the eyes from possible explosion.

After a few seconds, the glowing gas will collect as a brilliant incandescent ball at the end of the electrodes. Just how long the heat should be continued to be applied after this occurs will have to be determined experimentally.

The circuit shown is that of a conventional relaxation oscillator. However, it is important to shield



Relaxation oscillator circuit for the photoelectric experiments

New 1951 · · MODEL V-4A

Heathkit VTVM KIT

HAS EVERY EXPENSIVE *Feature*

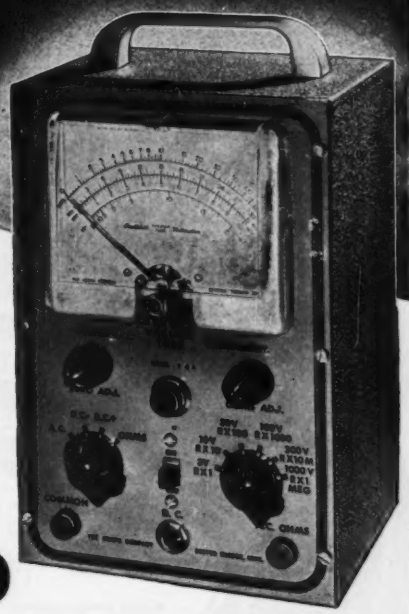

- ★ Higher AC input impedance, (greater than 1 megohm at 1000 cycles).
- ★ New AC voltmeter flat within 1 db 20 cycles to 2 megacycles (600 ohm source).
- ★ New accessory probe (extra) extends DC range to 30,000 Volts.
- ★ New high quality Simpson 200 microampere meter.
- ★ New ½% voltage divider resistors (finest available).
- ★ 24 Complete ranges.
- ★ Low voltage range 3 Volts full scale (⅓ of scale per volt).
- ★ Crystal probe (extra) extends RF range to 250 megacycles.
- ★ Modern push-pull electronic voltmeter on both AC and DC.
- ★ Completely transformer operated isolated from line for safety.
- ★ Largest scale available on streamline 4½ inch meter.
- ★ Burn-out proof meter circuit.
- ★ Isolated probe for dynamic testing no circuit loading.
- ★ New simplified switches for easy assembly.

New LOW PRICE **$23.50**

The new Heathkit Model V-4A VTVM Kit measures to 30,000 Volts DC and 250 megacycles with accessory probes — think of it, all in one electronic instrument more useful than ever before. The AC voltmeter is so flat and extended in its response it eliminates the need for separate expensive AC VTVM's. + or − db from 20 cycles to 2 megacycles. Meter has decibel ranges for direct reading. New zero center on meter scale for quick FM alignment.

There are six complete ranges for each function. Four functions give total of 24 ranges. The 3 Volt range allows 33⅓% of the scale for reading one volt as against only 20% of the scale on 5 Volt types.

The ranges decade for quick reading.

New ½% ceramic precision are the most accurate commercial resistors available — you find the same make and quality in the finest laboratory equipment selling for thousands of dollars. The entire voltage divider decade uses these ½% resistors.

New 200 microampere 4½" streamline meter with Simpson quality movement. Five times as sensitive as commonly used 1 MA meters.

Shatterproof plastic meter face for maximum protection.

Both AC and DC voltmeter use push-pull electronic voltmeter circuit with *burn-out* proof meter circuit.

Electronic ohmmeter circuit measures resistance over the amazing range of 1/10 ohm to one billion ohms all with internal 3 Volt battery. Ohmmeter batteries mount on the chassis in snap-in mounting for easy replacement.

Voltage ranges are full scale 3 Volts, 10 Volts, 30 Volts, 100 Volts, 300 Volts, 1000 Volts. Complete decading coverage without gaps.

The DC probe is isolated for dynamic measurements. Negligible circuit loading. Gets the accurate reading without disturbing the operation of the instrument under test. Kit comes complete, cabinet, transformer, Simpson meter, test leads, complete assembly and instruction manual. Compare it with all others and you will buy a Heathkit. Model V-4A. Shipping Wt., 8 lbs. Note new low price, $23.50

New 30,000 VOLT DC PROBE KIT

Beautiful new red and black plastic high voltage probe. Increases input resistance to 1100 megohms, reads 30,000 Volts on 300 Volt range. High input impedance for minimum loading of weak television voltages. Has large plastic insulator rings between handle and point for maximum safety. Comes complete with PL55 type plug.

No. 3366 High Voltage Probe Kit. Shipping Wt., 2 pounds. **$5.50**

Heathkit RF PROBE KIT

Crystal diode probe kit extends range to 250 megacycles ± 10% comes complete with all parts, crystal, cable and PL55 type plug.

No. 309 RF Probe Kit. Shipping Wt., 1 lb. **$5.50**

ROCKE INTERNATIONAL CORP. 13 E. 40th ST. NEW YORK CITY (16)

The HEATH COMPANY

. . . BENTON HARBOR 16, MICHIGAN

Here's why those in the know

–demand **CANNON PLUGS**

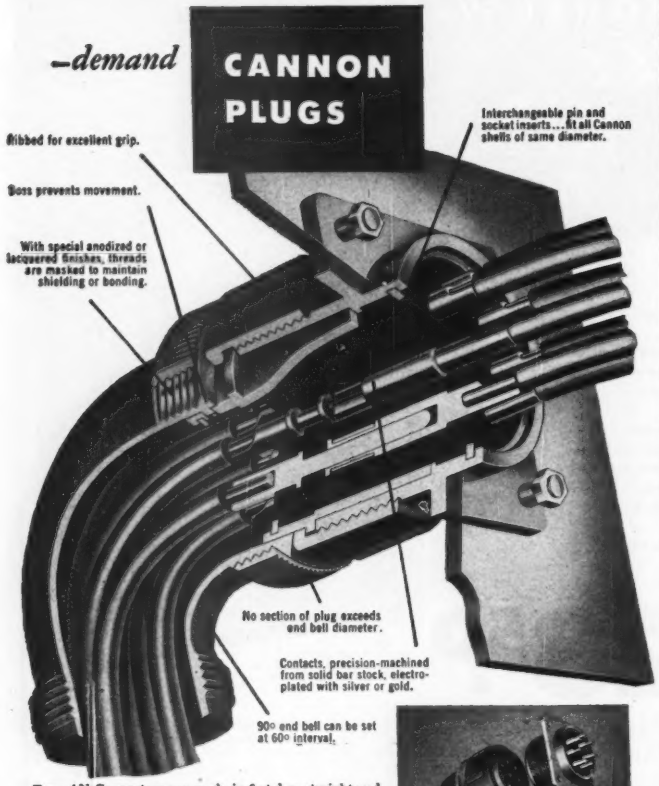
Ribbed for excellent grip.
Boss prevents movement.
With special anodized or lacquered finishes, threads are masked to maintain shielding or bonding.
Interchangeable pin and socket inserts...fit all Cannon shells of same diameter.
No section of plug exceeds end bell diameter.
Contacts, precision-machined from solid bar stock, electro-plated with silver or gold.
90° end bell can be set at 60° interval.

Type AN Connectors are made in 6 styles; straight and 90° cord plugs; box, wall, and extension cord receptacles; and special quick disconnect plugs. Fifteen diameters for inserts with contact arrangements from single to 100 contacts. Contact capacities from 5 to 200 amps. Peak voltages from 70 to 9,000 volts.



Cannon split-shell design advantages

no assembly tools needed
end bells are interchangeable
no slack in lines
test without disengaging plug
easy inspection and circuit changes

See that your circuit requirements are met. See that all control, communication and power circuits have firm positive contact, low dielectric loss... and see that each circuit is protected by the design advantages found only in Cannon Plugs. AN Connector Series is just one of the many Cannon types—world's most complete line. Request bulletins by required type or describe the connector service you need.

CANNON ELECTRIC

Since 1915

LOS ANGELES 31, CALIFORNIA

REPRESENTATIVES IN PRINCIPAL CITIES

the apparatus to prevent r-f pickup from broadcast stations. A surprisingly small amount of r-f pickup will serve to foul up the demonstration. Capacitor C_1 is a pyranol or other low-leakage type, conventional paper types are not suitable.

Clean the bulb with carbon tetrachloride and solder the wire leads to hook-up wire in such a manner to provide a minimum clearance between the bulb and other objects of four inches. For the initial testing, a 60-watt lamp should be located about five feet from the neon bulb. With the lamp off, the room should be completely dark.

Initial Adjustments

With the lamp turned on, adjust R_1 and R_2 until a flashing rate of approximately one flash per second is obtained. Next, find that setting of R_1 which barely allows the neon bulb to flash. If the flashing frequency is now greatly different from the suggested one-per-second rate, readjust R_2.

Turn off the sixty watt lamp. One of three things will happen; the neon bulb will cease flashing, it will flash at a noticeably greater frequency, or there will be no discernible effect.

If the flash rate increases, reverse the battery polarity and repeat the adjustment procedure. This will result in the first effect. Once the neon bulb has displayed photoelectric sensitivity by virtue of the first or second effects, a flashlight may be substituted for the lamp. By finer adjustment of the potentiometers, it should be possible to trigger the neon bulb from a distance of at least thirty feet with a flashlight beam.

If it is desired to extinguish the flashing by means of a light beam, then the second effect is the proper mode of operation. The threshold adjustment of R_1 should in this case be made in total darkness rather than under 60-watt lamp exposure.

If no photoelectric effect is perceptible, try another neon bulb which was subjected to greater or less heat treatment. The writer, after considerable experimentation, has not been able to develop a better sensitizing method. The treatment

STANDARD RI-FI* METERS

14kc to 1000mc!

DEVELOPED BY **STODDART** FOR THE ARMED FORCES.

AVAILABLE COMMERCIALLY.

VHF!
15 MC to 400 MC
NMA - 5

Commercial equivalent of TS-587/U.
Sensitivity as two-terminal voltmeter, (95 ohms balanced) 2 microvolts 15-125 MC; 5 microvolts 88-400 MC. Field intensity measurements using calibrated dipole. Frequency range includes FM and TV Bands.

VLF!
14 KC to 250 KC
NM - 10A

Commercial equivalent of AN/URM-6.
A new achievement in sensitivity! Field intensity measurements. 1 microvolt-per-meter using rod; 10 microvolts-per-meter using shielded directive loop. As two-terminal voltmeter, 1 microvolt.

HF!
150 KC to 25 MC
NM - 20A

Commercial equivalent of AN/PRM-1.
Self-contained batteries. A.C. supply optional. Sensitivity as two-terminal voltmeter, 1 microvolt. Field intensity with ½ meter rod antenna, 2 microvolts-per-meter; rotatable loop supplied. Includes standard broadcast band, radio range, WWV, and communications frequencies.

UHF!
375 MC to 1000 MC
NM - 50A

Commercial equivalent of AN/URM-17.
Sensitivity as two-terminal voltmeter, (50-ohm coaxial input) 10 microvolts. Field intensity measurements using calibrated dipole. Frequency range includes Citizens Band and UHF color TV Band.

Since 1944 Stoddart RI-FI* instruments have established the standard for superior quality and unexcelled performance. These instruments fully comply with test equipment requirements of such radio interference specifications as JAN-I-225, ASA C63.2, 16E4(SHIPS), AN-I-24a, AN-I-42, AN-I-27a, AN-I-40 and others. Many of these specifications were written or revised to the standards of performance demonstrated in Stoddart equipment.

The rugged and reliable instruments illustrated above serve equally well in field or laboratory. Individually calibrated for consistent results using internal standard of reference. Meter scales marked in microvolts and DB above one microvolt. Function selector enables measurement of sinusoidal or complex waveforms, giving average, peak or quasi-peak values. Accessories provide means for measuring either conducted or radiated r.f. voltages. Graphic recorder available.

***Radio Interference and Field Intensity.**

Precision Attenuator for UHF!

Less than 1.2 VSWR to 3000 MC.
Turret Attenuator:
0, 10, 20, 30, 40, 50 DB.
Accuracy ± .5 DB.

Patents applied for.

STODDART AIRCRAFT RADIO CO.

6644 SANTA MONICA BLVD. HOLLYWOOD 38, CALIF.
Hillside 9294

you can depend upon
PYROFERRIC
Your best bet for
POWDERED IRON CORES

PYROFERRIC engineers are specialists and pioneers in the technique of powder metallurgy development and iron core manufacture. Consult with them on your iron core or powder metallurgy requirements...no requirement either too small or too large.

★ ★ ★

OUR SPECIAL DEFENSE CONTRACT DEPARTMENT ASSURES PROMPT SERVICE FOR ALL GOVERNMENT WAR WORK.

Address all communications to

PYROFERRIC
621 EAST 216 ST., NEW YORK 67, N. Y.

• With a new and second plant at 14 North Bleeker Street, Mt. Vernon, N. Y., PYROFERRIC is able to meet the increasing demands for iron cores and powdered metallurgy development.



Circuit for using neon bulb as a d-c source when exposed to r-f radiation. Capacitor C is connected at the terminals of the bulb

evidently makes one electrode more photoemissive than the other.

Another interesting property of gaseous diodes involves the generation of a d-c emf when the gas is ionized by external radiation. A four-watt 150-mc self-excited oscillator is employed to supply the radiant energy. It is not necessary to treat the neon bulb for this demonstration. It is only essential that the center of the induced ionization is closer to one electrode than the other.

Readings as high as ten volts on a 5,000-ohm-per-volt meter are obtainable. The polarity of this emf is determined by the electrode which is closest to the mass of glowing gas. As with the photoelectric experiment, one electrode assumes the role of anode while its mate functions as the cathode.

The 2050 thyratron also works well in this capacity. It is unnecessary to heat the filament; the screen and cathode seem to be the best pair of electrodes to use.

A gaseous diode mounted near a tank or antenna circuit could be used as a power-indicating device and should be particularly well suited for certain microwave techniques. For such and similar applications, the gaseous diode will be found a more rugged device than a crystal which is susceptible to erratic changes and burnout from r-f currents often induced by stray pickup.

Sine and Square Wave Generator Selective Amplifier

THE ARTICLE with the above title appeared in the December, 1950, issue of ELECTRONICS. Through an

SMALLEST LIGHTEST FASTEST

type 44 STEPPING SWITCH

Up to 6 Levels — 10-point plus home; yet it's Smaller Than Your Hand! Only 4½ inches long—and about half that wide—Automatic Electric's new stepping switch averages only 13½ ounces in weight. Yet it gives you *more* than other larger switches.

It's speedy . . . a typical three-level 10-point switch, at 48 volts D. C., self-interrupted, runs approximately *80* steps a second—impulse controlled, at 35 steps a second.

It's smoother . . . brush springs are in an "11th" position; wipers pass over them exactly as over bank contacts. No double load in any position—no "galloping."

It assures long life . . . smooth operation means longer life; in addition, all driving parts are especially armored against wear. In rigid laboratory tests, Type 44 Stepping Switches averaged *20,000,000* operating cycles (200 million steps!) and then required only minor readjustment.

It's adaptable . . . meets your specific needs with a wide range of coils (for any D. C. voltage up to 110), bank levels, bridging and non-bridging wipers, interrupter springs and off-normal springs.

The Type 44 Stepping Switch has *less* weight—takes *less* space—and gives you *more* of everything else! Get complete data NOW on this revolutionary new switch. Call, wire, or write AUTOMATIC ELECTRIC SALES CORPORATION, 1033 W. Van Buren St., Chicago 7, Ill. In Canada: Automatic Electric (Canada) Limited, Toronto.

RELAYS SWITCHES

AUTOMATIC ELECTRIC

CHICAGO

WHEN YOU NEED A MINIATURE TRANSFORMER

CHECK THESE FEATURES OF THE HORNET

✓ **SIZE AND WEIGHT** Because they are designed for high operating temperatures, Hornet Transformers and Reactors have only about one-fourth the size and weight of Class A units of comparable rating.

✓ **VOLTAGE RATINGS** Designs are available for RMS test voltages up to 10,000 volts at sea level, and up to 5,000 volts at 50,000 feet altitude. Power ratings from 2VA to 5KVA.

✓ **POWER FREQUENCIES** These units are designed to operate on 380/1600 cps aircraft power supplies, 60 cps power supplies, and any other required power frequency.

✓ **AMBIENT TEMPERATURES** Hornet Units can be designed for ambient temperatures up to 200 deg. C. Size for any given rating depends upon ambient temperature and required life.

✓ **LIFE EXPECTANCY** Extensive tests indicate that the life expectancy of Hornet units at continuous winding temperatures of 200 deg. C. is over 50,000 hours.

✓ **MOISTURE RESISTANCE** Since Hornet Transformers and Reactors contain only inorganic insulation, they are far more moisture resistant than conventional Class A insulated units.

✓ **EFFICIENCY** Regulation and efficiency of Hornet Transformers compare favorably with Class A units.

✓ **SPECIFICATIONS** Hornet Transformers meet the requirements of Government specifications covering this type of equipment.

Bulletin B300, containing full electrical and dimensional data on Hornet units, is now available. Write for it, or tell us your specifications for special units.

NEW YORK TRANSFORMER CO., INC.
ALPHA NEW JERSEY

oversight credit was not given the author for his circuit design and analysis. The article should have carried a by-line crediting George Ellis Jones, Jr., Department of Chemical Engineering, The University of Pittsburgh, Pittsburgh, Pennsylvania.

SHOP SHORTCUTS

VOLTMETERS and milliammeters cannot be used for measuring accurately the output of a pentode tube in a circuit because of the high value of the pentode plate resistor. If a 0-150-volt electrostatic voltmeter is placed across the plate resistor, it will not draw any current and, consequently, will not load the plate circuit.

Fred Lichtgarn
Chicago, Ill.

A SOLDERING-IRON holster, pivoted to assume a vertical position when empty, saves time on the production line. The holster is fastened to a block of wood and mounted above and near the back of the bench. When the iron is placed in the holster, the pivotal action allows it to adjust itself to an almost horizontal position with the tip of the iron pointed slightly upwards. With


FINISH: CADMIUM PLATE AFTER ASSEMBLY OF METAL PARTS
NOTCH TO FIT UNDER BENCH
GRIND CORNERS ROUND
SPOT-WELD C TO A
PIVOT POINT
AIR SPACE BETWEEN A & C
DIA MOUNTING HOLES
SPOT WELD D TO A
THREE STRIPS 0.032" SHEET METAL (2½" 2½" & 8" LONG) FOLDED AND SPOT-WELDED OVER EDGES OF A
80.14 DRILL
0.032" SHEET METAL
80.9 DRILL
WOOD BLOCK
PARTS A, C & D ARE 0.032" PERFORATED SHEET STEEL

the iron in this position, the heat rises up and away from the handle and the operator. A large fibre washer prevents the iron from sliding out the back of the holster. The line cord is kept out of the operator's way by being connected to an overhead outlet.

Allen B. DuMont Laboratories, Inc.
Passaic, N. J.

no hand controls this "brain"



Look for amazing things to come from the engineers who designed it

It's an Analogue Computer, contract developed and manufactured by Arma Corporation for the Armed Forces. The human element enters not at all into its continuous solution of many complex equations simultaneously and the deadly accuracy with which it controls the fire of shells and other missiles. It translates original data into required results automatically . . . is the swiftest means of computing problems in which factors vary continuously.

Symbolizing the engineering progress crowded into the post-war years at Arma, the modern electrical analogue computer is composed of interchangeable Arma "Brain Blocks"*. Highly trained technical personnel is not required to service it.

The Analogue Computer is an example of the complex types of instrumentation Arma has developed and manufactured. Other amazing things developed by Arma engineers include many combinations of computer elements and servo mechanisms that advance the automation of industry. The only limits to automation recognized at Arma are situations defying reduction to finite mathematical formulae.

Arma Corporation has devoted more than 30 years to contract development and manufacture of unique things.

*** "Brain Block" components and the "Brain Block" technique of instrumentation were created by the people of Arma Corporation. The contributions thus made to the development of electrical brains for machines stagger the imagination.**

ARMA CORPORATION

254 36th STREET, BROOKLYN 32, N. Y.

SUBSIDIARY OF AMERICAN BOSCH CORPORATION

ARMA PRODUCTS RELEASED FOR PRIVATE INDUSTRY

ARMA ELECTRICAL RESOLVERS • ARMA SYNCHRON • ARMA INDUCTION MOTORS • ARMA INDUCTION GENERATORS • ARMA MECHANICAL DIFFERENTIALS • ARMA ALTERNATING VOLTAGE COMPARATOR • COMPUTING MECHANISMS • INDUSTRIAL CONTROLS • STABILIZATION DEVICES • NAVIGATIONAL EQUIPMENT • LUMITRON AUTOMATIC INSPECTION SYSTEM

QUALITY ARMA PRECISION INSTRUMENT

For INDUSTRY • RESEARCH • PRODUCTION • SERVICE

You can get it—
at MILO!

FAIR DISTRIBUTION FOR ALL
is the MILO Watchword!

Yes, in these days of war and re-armament there are plenty of shortages in electronic components and equipment. But **Milo comes through for you!** And here's why:

Because Milo believes in **just and equitable distribution to all** its customers, whether old or new. This is the fair-play creed of service and cooperation that built Milo—and Milo sticks to it, scarcities or no.

Because Milo's great warehouse holds **complete stocks of all the best lines.** Just look at this partial list of the more than 150 first-rate manufacturers whose products are available now from Milo:

ADVANCE ELECTRIC
AEROVOX
ALPHA WIRE
AMERICAN TELEVISION & RADIO
BELDEN • BLILEY
DAVID BOGEN
BUD • BURGESS
BUSSMANN
CLAROSTAT
CONDENSER PRODUCTS
CORNELL-DUBILIER
CONTINENTAL CARBON
DEJUR-AMSCO
DIALCO • DRAKE
EITEL-McCULLOUGH
ERIE
GENERAL CEMENT
GENERAL ELECTRIC
GUARDIAN ELECTRIC
HAMMARLUND
HICKOK • HYTRON
INSULINE • IRC
E. F. JOHNSON
KESTER
KINGS ELECTRONICS
LITTELFUSE
JAMES MILLEN
NATIONAL COMPANY
OHMITE
PAR-METAL
POTTER & BROMFIELD
PRECISION APPARATUS
PREMAX
SANGAMO
SHALLCROSS
SHURE BROS.
SIMPSON ELECTRIC
SOLA ELECTRIC
SPRAGUE
STANDARD TRANSFORMER
SUPERIOR ELECTRIC
SYLVANIA • TUNG-SOL
TRIPLETT
UNGAR ELECTRIC
WARD LEONARD
WESTON

Write for your **MILO** Catalog

Milo's newest catalog, jam-packed with 1053 pages of descriptions, specifications, illustrations and prices, is the key to the latest electronics products you want. Write for it today—on your company letterhead, please, stating your position, since it is limited to responsible officials only.

MILO doesn't just talk cooperation.
MILO GIVES YOU COOPERATION!

MILO Radio & Electronics Corp.
200 Greenwich Street, New York 7, N. Y.
PHONE BEekman 3-2980
Cable Address: MILOLECTRO
The ONE source for ALL your electronic needs



FIG. 3—Response of various types of phototubes including suggested combination unit

and curve *A* shows the combined response of two photoemissive tubes, one with a semitransparent Sb-Cs surface, the other with a Ag-Cs_2O-Cs surface placed one behind the other, the light shining on and through the Sb-Cs cathode. The use of a more transparent Sb-Cs surface would give a more uniform response throughout the spectrum.

"Although the double surface tube shows all the expected features, it does not seem practical as compared to the combination of two suitably-selected separate tubes. The conditions in a single tube are rather complicated and depend greatly on the geometry of the tube, the processing of the cathodes, and on the relative voltages applied to both cathodes and the anode. Two separate tubes could be processed more readily to maximum sensitivity of each surface and there would be no secondary emission to affect the Ag-Cs_2O-Cs surface."

A Novel Pressure-Measuring Method

AN INTERESTING and unique method for measuring pressure electrically has been developed. The device used has two exceptionally inviting advantages. First, there are no intricate mechanical linkage systems, and second, the moving parts are all sealed in a chamber filled with an inert gas (argon).

Essentially, the device consists of an air-tight chamber filled with a gas whose expansion characteristics are known. One wall of the chamber is made up of a flexible diaphragm that will move inward when the pressure outside the

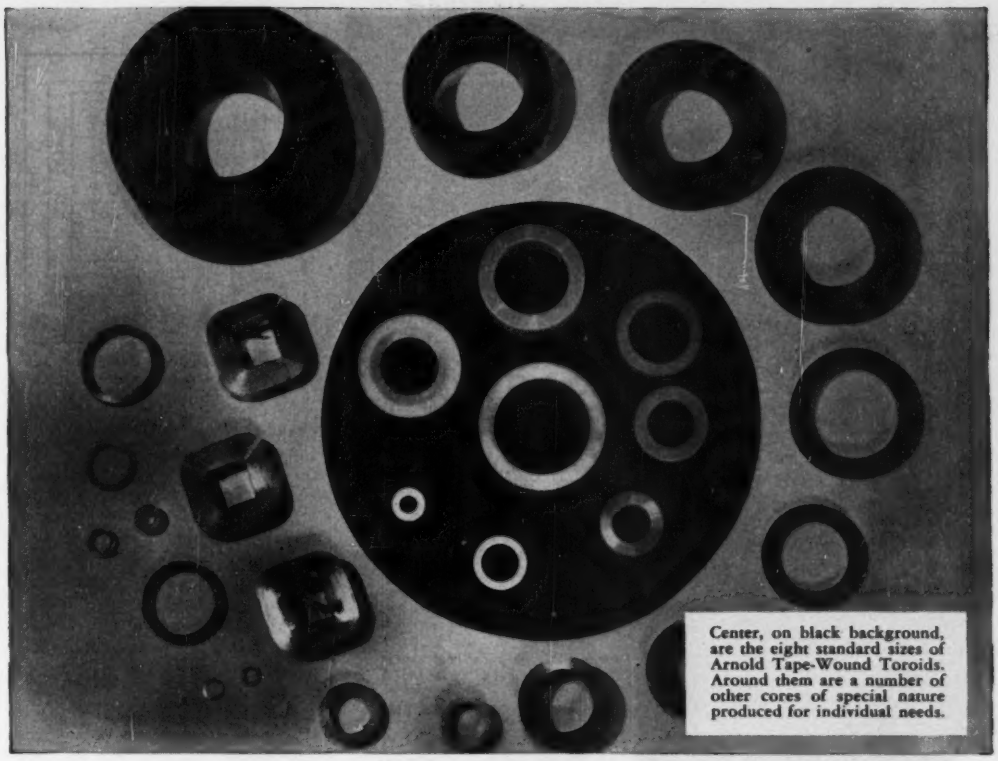

Center, on black background, are the eight standard sizes of Arnold Tape-Wound Toroids. Around them are a number of other cores of special nature produced for individual needs.

ARNOLD TAPE-WOUND TOROIDAL CORES

of DELTAMAX 4-79 MO-PERMALLOY SUPERMALLOY*

APPLICATIONS

MAGNETIC AMPLIFIERS
PULSE TRANSFORMERS
NON-LINEAR RETARD COILS and TRANSFORMERS
PEAKING STRIPS, and many other specialized applications.

RANGE OF SIZES

Arnold Tape-Wound Toroids are available in eight sizes of standard cores—all furnished encased in molded nylon containers, and ranging in size from ½" to 2½" I.D., ¾" to 3" O.D., and ½" to ½" high.

RANGE OF TYPES

These standard core sizes are available in each of the three magnetic materials named, made from either .004", .002" or .001" tape, as required.

In addition to the standard toroids described at left, Arnold Tape-Wound Cores are available in special sizes manufactured to meet your requirements—toroidal, rectangular or square. Toroidal cores are supplied in protective cases.

*Manufactured under licensing arrangements with Western Electric Company.

WBO 2102

THE ARNOLD ENGINEERING COMPANY
SUBSIDIARY OF ALLEGHENY LUDLUM STEEL CORPORATION
General Office & Plant: Marengo, Illinois

you get MORE PERFORMANCE
for
LESS MONEY
with the NEW Browning
OSCILLOSYNCHROSCOPE

MODEL ON-5

For only
$485.00

this new five-inch Browning 'scope gives you the basic laboratory equipment for pulse work — in a single, compact unit with:

- Triggered sweep rate continuously variable from 1.0 to 25,000 microseconds per inch.
- Sawtooth sweep rate 10 cycles to 100 KC.
- Sweep calibration (triggered and sawtooth) in microseconds per screen division accurate to ±10%.
- Vertical amplifier flat within 3 db. from 5 cycles to 5 megacycles.
- Sensitivity 0.075 volts RMS per inch.
- Horizontal amplifier d.c. to 500 KC, sensitivity 2 volts per inch.
- Self-calibrating on both X and Y axis.
- Readily portable . . . weighs but 50 pounds.

plus these ELECTRICAL and MECHANICAL features

• 5UP1 cathode-ray tube operates at accelerating potential of 2600 volts • Sweep starting time is approximately 0.1 microsecond • Sweep may be triggered or synchronized by positive or negative sine-wave or pulse signals of 0.5 volts (external) or 0.75 inches deflection (from vertical amplifier) • Three-step attenuator — 100:1, 10:1, and 1:1, plus continuous adjustability over entire range • Peak-to-peak vertical calibration voltages of 0-2-20-200 at accuracy of ± 10% • Cathode connection, brought out to front panel, allows external blanking and marker connection • All deflection plates are available for direct connection • Steel cabinet finished in black wrinkle • Steel panel finished in black leatherette • Copper-plated steel chassis with lacquer finish • Controls grouped by function for operating convenience • Free-view screen has graduated X- and Y-axis scales • Size: 10" wide, 14½" high, 16¾" deep • Instrument draws 180 volt-amperes at 115 volts 60 cycles.

NET PRICE, F.O.B. Winchester, Mass.....$485.00

FREE BULLETIN gives further data on this new, low-cost, versatile oscillosynchroscope. Ask for data sheet ON-54E.

In Canada, address Measurement Engineering Ltd., Arnprior, Ontario

BROWNING
Laboratories, Inc.
Winchester, Mass.
ENGINEERED FOR ENGINEERS



Simple thyratron circuit for use with novel pressure-measuring unit

chamber exceeds the pressure of the gas within the chamber. A pair of electrical contacts are arranged so that a heater circuit is closed whenever the outside pressure presses the diaphragm inward. This heater circuit causes the gas in the chamber to expand, until it equals the pressure outside the chamber, at which time the heater contacts open. The temperature is thus held at some point where the pressure of the gas equals outside pressure.

A thermistor, also placed inside the chamber, along with the gas and heater contacts, can be used to measure the average temperature of the gas, and thus to determine the pressure of the gas by means of a calibration chart. The circuit of an instrument using this pressure-measuring device is shown in the illustration. According to Edward C. Blom, who describes this instrument in detail in *Instruments* (p 903, Sept. 1950), a model using this circuit has been in use over two years. The only maintenance required is the replacement of the thyratron once every six months or so.

Resistance-Coupled Amplifier Bandwidth

B. A. LIPPMANN
Nucleonics Division
Naval Research Laboratory
Washington, D. C.

THE PRACTICE of examining the behavior of resistive amplifier coupling networks by an approximate method of analysis has apparently obscured the fact that the gain characteristic of this circuit is exactly equivalent to a single-tuned

STEP UP COIL PRODUCTION *with* MICAFIL WINDERS

Toroidal • Sector • Telephone Relay • Standard Relay • Loud Speaker • Choke • Field • Honeycomb • Transformer • and Many Other Types of Coils and Armatures Wound Accurately and Quickly

MODEL RW TOROIDAL WINDER with Coil Supports—automatically winds toroidal coils around 360° or sector coils up to 270°. Winds in either direction. Made in three sizes for single wire from 18 to 38 AWG, double or stranded wires from 2 x 18 to 2 x 26 AWG. Maximum winding speed 200 RPM.



MODEL OOFA AUTOMATIC FINE-WIRE WINDER with removable semi or fully automatic paper interleaving attachment. Will wind wires from 24 to 44 AWG at certain speed ranges between 950 and 6000 RPM. Attachment available for winding two coils simultaneously. MODEL OOFA-T, similar to above, winds up to 12,000 RPM.



MODEL AWO-A SMALL ARMATURE WINDER—Fully automatic for mass production of small two-pole armatures with straight or skewed slots. Wire is guided by adjustable guide blade. Wire sizes (without insulation) from 23 to 44 SWG. Winding speed 700 RPM.

MODEL OGA AUTOMATIC WINDER with removable semi or fully automatic paper interleaving attachment. Adaptable for multiple coil winding with or without interleaving and for interweaving of cotton threads. Made for five speed ranges from 70 to 3000 RPM. Wire sizes from 8 to 44 AWG.





MODEL OOFA-PEM MULTIPLE FINE-WIRE WINDER with fully automatic paper interleaving device, for flanged or flangless coils. Winds up to 6 coils at a time with individual paper interleaving. MODEL OOFA-PEB winds up to 10 flangless coils with common paper interleaving. Wire sizes from 24 to 44 AWG. Winding speeds from 360 to 3000 RPM.

THESE WINDERS HAVE MANY ADVANTAGEOUS OPERATING FEATURES:

Accurate and Stepless adjustments of feeds during operation.

Automatic reversing—without play—of wire guide at layer end.

Simple adjustment of wire pull, which will remain constant regardless of speed and reel diameter.

Five figure turn counter with zero set-back lever.

Automatic cut-off at pre-set number of turns, or by wire breakage or empty reel.

There's a MICAFIL for Every Winding Application.

NATIONAL REPRESENTATIVES

COSA CORPORATION

405 Lexington Ave., New York 17

SEE THESE MACHINES IN OPERATION AT COSA'S NEW YORK SHOW ROOM OR SEND FOR DESCRIPTIVE LITERATURE

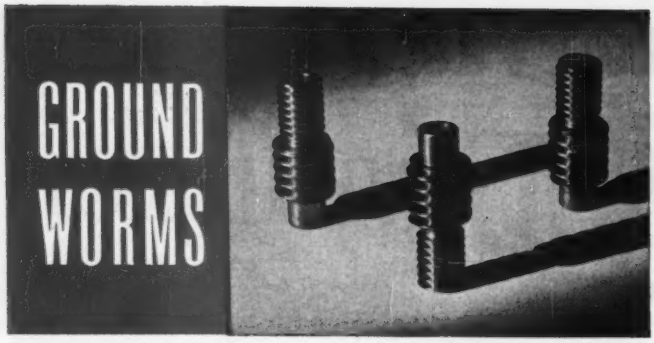

Hard or soft worms, lead screws, etc. ground to your exact specifications in small lots or production runs. We invite you to submit your prints for quotation without obligation.

MEMBER OF

- SPUR
- WORM
- SPLINE
- HELICAL
- SPROCKET
- STRAIGHT BEVEL
- GROUND THREADS

Beaver Gear Works Inc.

1021 PARMELE STREET, ROCKFORD, ILLINOIS

DYNAMIC
WIRE WOUND RESISTORS

Each is precision wound to close tolerance. DEVITRIFIED MOISTURE-PROOF ENAMELED. will stand salt-water tests. a quality product. Standard or custom types to meet your requirements.

Whatever your resistor requirements DYNAMIC has the resistor you need. or will produce it on short notice.

DYNAMIC
RESISTOR CORPORATION
6 Cutter Mill Road Great Neck. N. Y.

circuit. In this article, the equivalence will be proved.

The standard uncompensated resistive coupling network takes the form shown in Fig. 1, where C_1 and C_2 include the tube and wiring capacitances, R_1 is the resultant of the load resistance and the plate resistance of the first tube taken as a parallel combination, and C_m is the coupling capacitor. Ordinarily, $C_m >> C_1$ and $C_m >> C_2$. Where approximate formulas are given, we shall understand them to refer to this condition.

The conventional analysis proceeds by examining the limiting forms the circuit takes at low, medium and high frequencies. For example, at low frequencies C_1 and C_2 are considered negligible and the voltage gain G is determined by considering the voltage divider formed by C_m and R_2 in series. The grid voltage on the second tube is $R_2[R_2 + 1/j\omega C_m]^{-1}$ times the plate voltage on the first tube. Using g for the transconductance of the first tube, its plate voltage is

$$\frac{-gR_1\left(R_2 + \dfrac{1}{j\omega C_m}\right)}{R_1 + R_2 + \dfrac{1}{j\omega C_m}}$$

times the input voltage. The gain G is therefore given by

$$G = \frac{-gR_1R_2}{R_1 + R_2 + 1/j\omega C_m},$$

so that the low-frequency 3-db

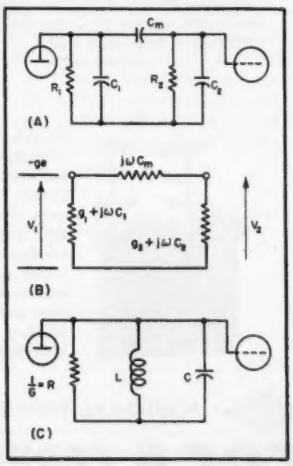

FIG. 1—Resistance-coupled circuit and equivalent

DUMONT TYPE 280-A

High-voltage operation, high sensitivity, and a 10-megacycle bandwidth are provided in the Type 280-A along with the calibrated sweep delay, versatile time-base synchronization, and sweep durations continuously variable from one to 15000 microseconds. These and many other precision features make the Type 280-A important quantitative equipment in industrial applications where detailed study of high-speed phenomena contributes to the evaluation of the quality and design of products.

Supplementing the usual sweep-control circuits of the cathode-ray oscillograph, the Type 280-A also contains a specialized video synchronizer unit. Used in conjunction with the calibrated sweep delay, it will select and display any line or fraction of a line of the standard RTMA television signal.

FEATURES

- Type 5XP- high sensitivity Cathode-ray Tube.
- 10-megacycle Video Amplifier.
- Pulse Response—0.01 μsec. rise time reproduced as a rise time of 0.04 μsec. or less.
- Video Synchronizer Unit—Field and line selector for a study of any portion of the composite television signal.
- Sweep Calibration—10-, 1-, 0.2-microsecond intervals.
- Calibrated Sweep Delay Ranges—100 μsec., 1000 μsec.; Accuracy ±0.1% full scale.
- Internal Trigger Generator—120 to 2500 cps.; can be synchronized to external signals from 120 cps. to 50,000 cps. Sweep may be triggered externally.
- Output Trigger—0 or 25 μsec. delay with respect to calibrated delay; 30 volts positive; rise time, 0.5 microseconds or less.
- Output Test Pulse—variable to 20 volts positive; duration, 1 μsec.; rise time, less than 0.01 μsec.; 25-usec. delay with respect to the start of the calibrated delay.

CALIBRATED

SWEEP DELAY

measures fractions of ONE MICROSECOND!

The precision sweep delays of the Du Mont Types 280-A and 256-D Cathode-ray Oscillographs provide for the accurate measurement of small time intervals.

provides DIRECT READINGS in Du Mont precision cathode-ray oscillographs



DUMONT TYPE 256-D

The Type 256-D is designed as a highly precise time-measuring device. Its versatility serves many of the general-purpose functions in laboratory work.

The calibrated sweep delay of the Type 256-D will measure time intervals up to 1000 microseconds with an accuracy of ±0.1% of the full-scale ranges of 100 μsec. or 1000 usec. With both delayed and undelayed sweeps, a movable marker in the Type 256-D will indicate that portion of the sweep which is expanded on the shorter delayed sweeps. Delayed sweeps are of 4-, 10-, and 25-microsecond durations. Undelayed sweeps are available in six ranges from 4 to 4500 microseconds.

Response of the video amplifier of the Type 256-D is within ±1 db at 20 cps; down no more than 3 db at 8 megacycles, no more than 6 db at 11 megacycles. Sensitivity is 0.7 peak-to-peak volt per inch. Pulse response is such that a rise time of 0.01 microsecond will be reproduced as a rise time of 0.04 microsecond or less.

Crystal-controlled timing markers are provided in the Type 256-D for calibration of the delay circuit sweeps. Both delayed and undelayed sweeps may be started by external trigger pulses of either polarity or by a built-in trigger generator which provides 1-microsecond pulses of either polarity, having a rise time of 0.3 microsecond and amplitude greater than 100 volts. Trigger repetition rates up to 2000 P.P.S. are usable.

Please address all inquiries concerning these precision cathode-ray oscillographs to:

ALLEN B. DU MONT LABORATORIES, INC., *INSTRUMENT DIVISION*, 1000 MAIN AVENUE, CLIFTON, NEW JERSEY

SYNCHROS

PRECISION-BUILT BY

ECLIPSE-PIONEER

GUARANTEED ACCURACY TO WITHIN 15 MINUTES ON ALL PRODUCTION UNITS

For more than 17 years Eclipse-Pioneer has been a leader in the development of high precision synchros for aircraft, marine and industrial applications. Today, thanks to this long experience and specialization, Eclipse-Pioneer Autosyn* Synchros give you a *guaranteed* accuracy of 15 minutes (maximum) on all individual AY 200 type 400 cycle transmitters, differential generators, control transformers and resolvers. Furthermore, this phenomenal accuracy applies to *all production units* in this series. Where special applications are involved, Eclipse-Pioneer will supply Autosyn Synchros with an even *finer* degree of accuracy. And remember, when you buy from Eclipse-Pioneer, this high precision is yours at the lowest possible cost.

*REG. TRADE MARK BENDIX AVIATION CORPORATION — LOOK FOR THE PIONEER MARK OF QUALITY REG. U.S. PAT. OFF.

Typical Performance Characteristics for one AY-201-3 Autosyn Synchro when transmitting to:

	One Control Transformer	Two Control Transformers	Three Control Transformers
INPUT			
Voltage	26-volts, single-phase	26-volts, single-phase	26-volts,single-phase
Frequency	400 cycles per second	400 cycles per second	400 cycles per second
Current	105 milliamperes	130 milliamperes	155 milliamperes
Power	0.90 watts	1.4 watts	1.9 watts
Impedance	85+j240 ohms	80+j180 ohms	77+j149 ohms
OUTPUT			
Voltage max. (rotor output)	18.0 volts	15.5 volts	13.3 volts
Voltage at null	30 millivolts	20 millivolts	20 millivolts
Sensitivity	315 millivolts/degree	270 millivolts/degree	230 millivolts/degree
Voltage phase shift	18.5 degrees	24.5 degrees	28.0 degrees
System accuracy (max. possible spread)	0.5 degrees	0.5 degrees	0.5 degrees

Other E-P precision components for servo mechanism and computing equipment:

Servo motors and systems • rate generators • gyros • stabilization equipment • turbine power supplies • remote indicating-transmitting systems and special purpose electron tubes.

For detailed information, write to Dept. C

ECLIPSE-PIONEER DIVISION of Bendix AVIATION CORPORATION

TETERBORO, NEW JERSEY

Export Sales: Bendix International Division, 72 Fifth Avenue, New York 11, N. Y.

point is

$$\omega_1 = 2\pi f_1 = 1/(R_1 + R_2)C_m.$$

At medium frequencies, all three capacitors are considered to have negligible reactances compared with R_1 and R_2 and the effective network is just R_1 and R_2 in parallel. In this frequency range, the gain is a maximum and has no frequency variation.

Finally, at high frequencies, C_m is considered equivalent to a short circuit, so that the network reduces to the parallel combination of the other elements. This network has a falling characteristic with the 3-db point at

$$\omega_2 = 2\pi f_2 = (g_1 + g_2)/(C_1 + C_2)$$

where the conductances of R_1 and R_2 are g_1 and g_2 respectively.

We now show that a straightforward analysis of the network of Fig. 1A leads to the result that it is exactly equivalent to a shunt combination of R, L and C.

Our problem is to compute $G = V_2/e$ for the admittance network of Fig. 1B. The result is

$$G = V_2/e = \frac{-jg\omega C_m}{[g_1 + j\omega(C_1 + C_m)][g_2 + j\omega(C_2 + C_m)] + \omega^2 C_m^2}$$

$$= \frac{-g}{\left[\frac{g_1C_2 + g_2C_1}{C_m} + g_1 + g_2\right] + j\omega\left(\frac{C_1C_2}{C_m} + C_1C_2\right) - \frac{jg_1g_2}{\omega C_m}}$$

We observe that if the coupling network were of the form shown in Fig. 1C, we would have

$$G = \frac{-g}{1/R + j\omega C - j/\omega L}$$

It follows that both networks will have exactly the same gain characteristic if we put

$$G = \frac{1}{R} = \frac{g_1C_2 + g_2C_1}{C_m} + g_1 + g_2$$

$$\cong g_1 + g_2$$

$$L = \frac{C_m}{g_1g_2}$$

$$C = \frac{C_1C_2}{C_m} + C_1 + C_2 \cong C_1 + C_2$$

The gain characteristic is therefore the same as that of a single-tuned circuit resonant at f_o where

$$\omega_o = \frac{1}{\sqrt{LC}} \cong \sqrt{\frac{g_1g_2}{C_m(C_1 + C_2)}}$$

(continued on p 198)

THE TOWER OF STRENGTH

IDEAL FOR
COMMUNICATIONS
MICROWAVE
TELEVISION
LIGHTING

Superior construction features give LOW COST Vee-D-X sectional towers the highest safety factor of any tower in its price class.

If you have an elevated installation problem, absolute permanency of your installation is assured when you use a VEE-D-X sectional tower. Strength is a major factor. Don't take chances with structural failure. Be sure with VEE-D-X!

- *Rugged, all-welded construction diagonally laced with angle iron for maximum rigidity.*
- *Can be erected on ground or on flat or peaked roof.*
- *Patented plate spaced at two foot intervals prevents twisting and affords rigidity found in no other tower.*
- *Safe and easy to climb.*
- *Completely galvanized, light weight tubular steel . . . 20 ft. section 72 lbs.*



PRE-ASSEMBLED for fast, inexpensive installation

VEE-D-X towers are designed for use at any height from 10 to 140 feet. They are self-supporting up to 20 feet and, where space is limited, *semi-guyed** type installations may be used at 30, 40, and 50 foot heights. Sketch at right shows the basic parts and necessary accessories for a complete installation. Three types of top mount are available. VEE-D-X towers may be ordered in separate units or as a complete package for a specific height. (Either guyed or semi-guyed.) Write the LaPointe-Plascomold Corporation of Unionville, Conn. for complete information.

*Semi-guyed towers employ one set of guy cables attached at a height of 10 ft. up the tower and anchored at a 6 ft. radius from the base.

VEE-D-X

BUILDERS OF THE WORLD'S MOST POWERFUL ANTENNAS

NOW You can afford a High Vacuum Furnace

This ONE → ***Versatile Unit lets you melt, pour, heat treat, degas***

At last there is now available a single furnace that does away with the need to purchase equipment for each phase of your high-vacuum, high-temperature work. Because of its modest price, it will fall within the budget of most laboratories.

With this new furnace you can melt and solidify — melt and pour — add to the melt — stir — look into the hot zone — measure hot zone temperatures — introduce controlled atmospheres — degas — heat treat. It's a complete, versatile unit, capable of handling the widest variety of metallurgical research work. Write today.

FEATURES

- Ultimate vacuum of less than 5×10^{-5} mm. Hg.
- Working temperatures up to 2000° C.
- Temperature controllable within ± 5° C.
- Hot zone reaches temperature within one minute.
- No refractories used in hot zone.
- 4" purifying type diffusion pump insures high capacity for out-gassing.
- Utilizes single turn low voltage resistance element of either tungsten or molybdenum 8" x 2½" dia.
- Constant temperature zone 6" x 2½" dia.
- Power supplied directly from mains to specially-designed variable auto transformer which is an integral part of unit.
- Either manual or automatic temperature control or both.
- Thermocouple vacuum gage is standard equipment. Other gages are available.
- Furnished complete with vacuum system, controls and gages including ammeter, volt-meter and temperature indicator.

INDUSTRIAL RESEARCH · PROCESS DEVELOPMENT
HIGH VACUUM ENGINEERING AND EQUIPMENT

METALLURGY · DEHYDRATION · DISTILLATION
COATING · APPLIED PHYSICS

National Research Corporation

Seventy Memorial Drive, Cambridge, Massachusetts

In the United Kingdom: BRITISH AMERICAN RESEARCH, LTD., London S. W. 7 — Wishaw, Lanarkshire

The Q and bandwidth Δf are

$$Q = \omega_o RC \cong \frac{1}{g_1 + g_2}\sqrt{\frac{g_1 g_2 (C_1 + C_2)}{C_m}}$$

$$\Delta\omega = \frac{\omega_o}{Q} \cong \frac{g_1 + g_2}{C_1 + C_2}$$

To find the 3-db points, we recall that $\Delta\omega = \omega_2 - \omega_1$ and $\omega_o^2 = \omega_1\omega_2$. Solving for ω_2 and ω_1

$$\omega_2 = (\Delta\omega/2) + \sqrt{(\Delta\omega/2)^2 + \omega_o^2}$$

$$\omega_1 = -(\Delta\omega/2) + \sqrt{(\Delta\omega/2)^2 + \omega_o^2}$$

For the two limiting cases,

$\Delta\omega/2\omega_o >> 1$ and $\Delta\omega/2\omega_o << 1$, we get

$$\left.\begin{aligned}\frac{\Delta\omega}{2\omega_o} << 1;\ \omega_1 &\cong \omega_o - \frac{\Delta\omega}{2}\\ \omega_2 &\cong \omega_o + \frac{\Delta\omega}{2}\end{aligned}\right\}\ \text{error} \cong \frac{\Delta\omega}{4\omega_o}$$

$$\left.\begin{aligned}\frac{\Delta\omega}{2\omega_o} >> 1;\ \omega_1 &\cong \frac{\omega_o^2}{\omega}\\ \omega_2 &\cong \Delta\omega\end{aligned}\right\}\ \text{error} \cong 3\left(\frac{\omega_o}{\Delta\omega}\right)^2$$

$$\left.\begin{aligned}\omega_2 \cong \Delta\omega\end{aligned}\right\}\ \text{error} \cong \left(\frac{\omega_o}{\Delta\omega}\right)^2$$

so that finally,

$$\omega_1 = \sqrt{\frac{g_1 g_2}{C_m\left(C_1 + C_2 + \frac{C_1 C_2}{C_m}\right)}}\left[\sqrt{\frac{C_m\left(g_1 + g_2 + \frac{g_1 C_2 + g_2 C_1}{C_m}\right)^2}{4 g_1 g_2\left(C_1 + C_2 + \frac{C_1 C_2}{C_m}\right)}} + 1 - \frac{\sqrt{C_m}\left(g_1 + g_2 + \frac{g_1 g_2 + g_2 C_1}{C_m}\right)}{2\sqrt{g_1 g_2\left(C_1 + C_2 + \frac{C_1 C_2}{C_m}\right)}}\right]$$

$$\omega_2 = \sqrt{\frac{g_1 g_2}{C_m\left(C_1 + C_2 + \frac{C_1 C_2}{C_m}\right)}}\left[\sqrt{\frac{C_m\left(g_1 + g_2 + \frac{g_1 C_2 + g_2 C_1}{C_m}\right)^2}{4 g_1 g_2\left(C_1 + C_2 + \frac{C_1 C_2}{C_m}\right)}} + 1 + \frac{\sqrt{C_m}\left(g_1 + g_2 + \frac{g_1 C_2 + g_2 C_1}{C_m}\right)}{2\sqrt{g_1 g_2\left(C_1 + C_2 + \frac{C_1 C_2}{C_m}\right)}}\right]$$

Or, since $\frac{\Delta\omega}{2\omega_o} >> 1$ in the cases of interest to us,

$$\omega_1 \cong \frac{g_1 g_2}{(g_1 + g_2)C_m} = \frac{1}{(R_1 + R_2)C_m}$$

$$\omega_2 \cong \frac{g_1 + g_2}{C_1 + C_2}$$

These results justify the usual approximate analysis for the case $C_m >> \frac{C_1}{C_2}$

For the opposite extreme, $C_m << \frac{C_1}{C_2}$ we get

(Continued on p 200)

Instrument NEWS

New Pacific Evenness Tester Uses Photoelectric Recorder

A new testing instrument developed by the Pacific Mills Worsted Division at Lawrence, Massachusetts, measures quickly and accurately the evenness and weight of textile strands. Known as the "Pacific Evenness Tester" and using a G-E photoelectric recorder, it largely eliminates the need for visual inspection of finished cloth, always a tedious and costly process.

The sensitivity of the system is indicated by the fact that a .002-inch deviation in strand thickness can represent full-scale deflection of the recorder.

The "Pacific Evenness Tester" is a tremendous step forward in the field of textile quality control. And it is one more proof of the versatility of the G-E photoelectric recorder. R. C. Wilkie (shown above), Manager of the Worsted Division's Engineering Research Department and designer of the new tester, says, "With its sustained accuracy, fast response, and high-sensitivity, the G-E photoelectric recorder is ideal for this application."

In the laboratories of the E. Forbert Schorndorfer Company, Cleveland, Ohio, specialists in paints for industrial products, the Zahn viscosimeter is used as one means for maintaining uniformity and quality of finished product.

G-E OSCILLOGRAPH AIDS IN STUDIES OF BEACH AND OCEAN FLOOR EROSION

The General Electric Type PM-10-C3 oscillograph is playing an important part in the extensive studies of beach and ocean floor erosion now being made at La Jolla, California, by the Scripps Institute of Oceanography, part of the Graduate School of the University of California, in co-operation with the Army Corps of Engineers. The purpose of the studies is to find ways to minimize the serious harbor damage often caused by the action of waves.

Using a unique double strain gage pick-up and special signal generators and amplifiers, all designed and built by Scripps personnel, the velocities of the waves are measured in two directions and the results recorded on photographic film by the Type PM-10-C3 oscillograph.

The oscillograph itself is located in the laboratory while the gage unit lies on the ocean floor more than half a mile away. Interconnecting cables relay the delicate signals.

Mr. James Snodgrass (shown at right), technical director, says "the wide frequency response and high sensitivity of the Type PM-10-C3 oscillograph, together with its adjustable resistances and high-speed camera control, make it particularly suitable for this application."



Magnets Balanced Quickly With Indicating Fluxmeter

Wilfred O. White and Sons, Inc., of Boston, Massachusetts, manufacturers of the famous *Constellation* spherical compass and other navigational instruments and associated equipment, are now using a General Electric indicating fluxmeter for checking the flux-density balance of permanent magnets used in their complete range of compasses.

The raw magnets are inserted in holes in a testing panel connected to the fluxmeter and especially designed for this application. The fluxmeter gives an immediate and accurate indication of their comparative strength. If one magnet is too strong, it is inserted into the "demagnetizer," another hole in the panel. The process is repeated until the desired balance is obtained.

With this system, the flux densities of the magnets can be brought to within 10 percent of each other, a high degree of balance for magnets of this type.

SECTION A602–196
APPARATUS DEPARTMENT
GENERAL ELECTRIC CO.
SCHENECTADY, N. Y.

Please send me information on the following products:

- ☐ Type PM-10-C3 oscillograph
- ☐ Type CE photoelectric recorder
- ☐ Indicating fluxmeter
- ☐ Zahn viscosimeter

NAME.....
COMPANY.....
STREET.....
CITY..... ZONE..... STATE.....

GENERAL ELECTRIC

REGULATED D. C.
UP TO 1000 VOLTS AT 500 M. A.

Featuring continuously variable output voltage Without Switching

Here are four power supplies especially designed to cover a wide range of applications in development and production. These instruments feature continuously variable output voltage, good regulation, low hum level, good stability and overload protection. Models 200-B, 204-A 205-A and 207-B will operate from line input of 105 to 125 volts A.C. 50-60 cycles and provide rated regulation within this change. Examine the specifications carefully and you may find that one or more of these units has an application in your research or production program.

MODEL 204-A
0-500v D. C. at 300 MA.

Output Voltage:
0-500v D.C. at 300 Ma. regulated
6.3v A.C. at 6 Amps. unregulated
Regulation: Within 1% from 30-500 v
Hum: Within 10 millivolts at full load
Meters: 0-500v D.C.
0-300 Ma. D.C.
Negative or positive side of high voltage output may be grounded.

MODEL 207-B
200-1000v D. C. at 500 MA.

Output Voltage
200-1000v D.C. at 500 Ma. regulated
Regulation: Within 1% from 200-1000 Volts
Hum: Within 20 millivolts at full load
Meters: 0-1000v D.C.
0-500 Ma. D.C.
Negative side of high voltage grounded.

MODEL 205-A
100-325v D. C. at 150 MA.

Output Voltage:
100-325v D.C. at 150 Ma. regulated
100-325v D.C. at 5 Ma. regulated by VR tube
0-150v D.C. at 6 Amps. unregulated
6.3v A.C. at 6 Amps. unregulated
Regulation: Within 1% from 100-325v D.C.
Hum: Within 10 millivolts at full load
Meters: None
Negative or positive side of high voltage output may be grounded.

MODEL 200-B
0-325v D. C. at 125 MA.

Output Voltage
0-325v D.C. at 125 Ma. regulated
6.3v A.C. at 6 Amps. unregulated
Regulation: Within 1% from 20-325 V
Hum: Within 10 millivolts at full load
Meters: 0-500v D.C.
0-150 Ma. D.C.
Negative side of high voltage grounded



Detailed information on any or all of the instruments above will be sent upon request. Price and delivery information will also be forwarded at the time of your request. Send for Catalog "A"—there is no obligation.

ELECTRONIC MEASUREMENTS COMPANY
Red Bank (E/M) New Jersey
REGULATED POWER SUPPLIES — VACUUM TUBE VOLTMETERS — SIGNAL GENERATORS

$$G = \frac{1}{R} \cong \frac{g_1C_2 + g_2C_1}{C_m} \qquad \omega_0 \cong \sqrt{\frac{g_1g_2}{C_1C_2}}$$

$$L = \frac{C_m}{g_1g_2} \qquad Q \cong \sqrt{\frac{g_1g_2C_1C_2}{g_1C_2 + g_2C_1}}$$

$$C \cong \frac{C_1C_2}{C_m} \qquad \Delta\omega \cong \frac{g_1C_2 + g_2C_1}{C_1C_2} = \frac{g_1}{C_1} + \frac{g_2}{C_2}$$

It is easily seen that the equivalent circuit is characterized by an inherently low Q. Indeed, since the original circuit of Fig. 1A is aperiodic, the equivalent circuit of Fig. 1C must have $Q < \frac{1}{2}$. In practice, Q is much smaller than $\frac{1}{2}$. For a 100-cps to 10^6-cps bandwidth, for example, $Q \cong \sqrt{10^2/10^6} = 0.01$.

Since this analysis shows that the circuit is exactly equivalent in its gain characteristic to a single-tuned circuit, it suggests the feasibility of combining this circuit with others in cases where an extremely low Q is required. The point of view taken here also suggests that several of these circuits might be stagger-tuned to produce a wide-band video amplifier without additional compensation. However, since $Q < \frac{1}{2}$, this circuit could only be used as the center stage of an odd number of stagger-tuned circuits.

New Accuracy in Speed-of-Light Measurements

THE SPEED OF LIGHT has been measured with an accuracy of 0.0002 percent by a special microwave system at Stanford University. The new figure of 186,280.0 miles per second is believed to be 10 to 20 times more accurate than the previously-accepted value of 186,272 which was drawn from



Accurate measurements of resonant frequency of microwave cavity permit determination of the speed of light with 0.0002-percent accuracy

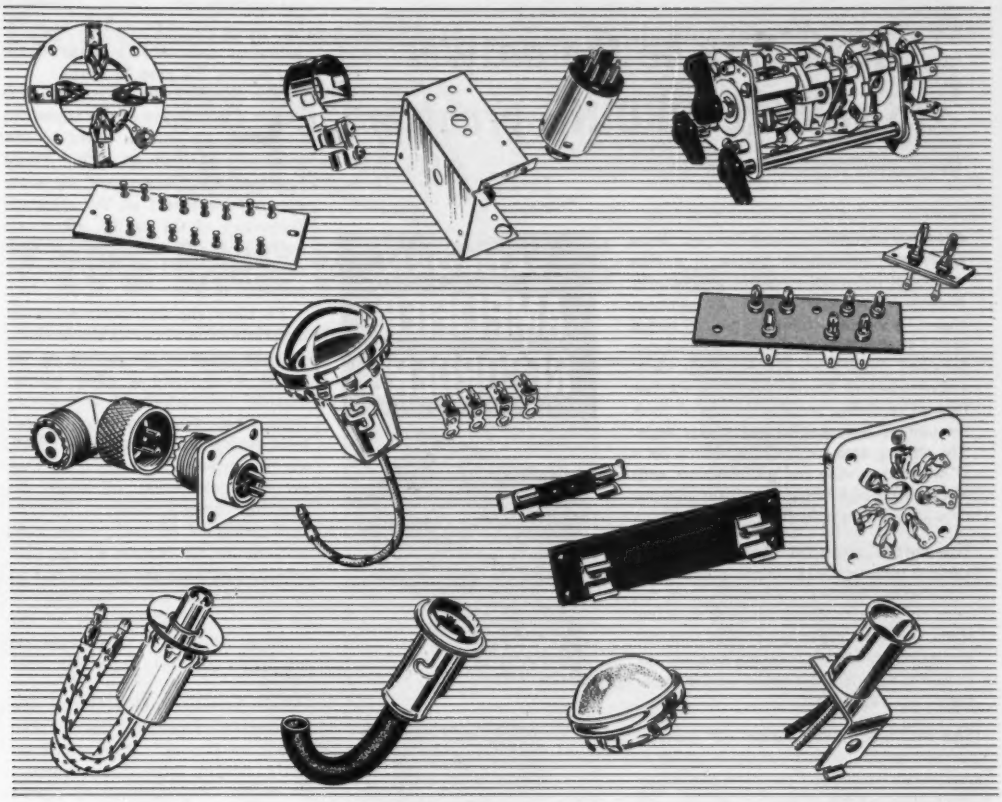

Do you remember?

Old hands in the electronics field will recognize some familiar items in the selection above. They are typical of the many components and assemblies we supplied for use by the Services from 1940-45. We also illustrate several new parts, representative of our current production.

With the present expansion of military procurement, we stand ready as before to supply the all-important components promptly . . . and in quantity. Just let us know your needs.

The UCINITE CO.

Newtonville 60, Mass.

Division of United-Carr Fastener Corp.

Specialists in

ELECTRICAL ASSEMBLIES,

RADIO AND AUTOMOTIVE

Here may be the answer to your RECORDING problem

Sanborn Amplifier Recorders are being found outstandingly useful in a wide variety of industrial recording applications. Records are produced *directly*, and continuously, by *heated stylus* on plastic coated record paper (Permapaper), are in *true rectangular* coordinates, and are sharp, clear, and *permanent*. Elimination of the *ink flow* type of recording permits the use of these recorders in any position and at any angle. The writing arm (or arms) is driven by a D'Arsonval moving coil galvanometer with an extremely high torque movement (200,000 dyne cms per cm deflection).

The single channel Model 128 is a vacuum tube recording voltmeter capable of reproducing electrical phenomena from the order of a few millivolts to more than 200 volts. Standard paper speed is 25 mm/sec. Slower speeds of 10, 5, and 2.5 mm/sec. are available. A variety of interchangeable amplifiers is available.

The multi-channel Model 67 provides for the simultaneous registration of *up to four* input phenomena on one record using, in a multiple system, the same principles and methods as the single channel Model 128.

In addition, this vertically mounted, metal cased amplifier-recorder provides a choice of eight paper speeds: 50, 25, 10, 5, 2.5, 1.0, 0.5 and 0.25 mm/sec., and further provides for the use of 4-, 2-, or 1-channel recording paper. Complete versatility of recording is offered in this unit by means of interchangeable amplifiers which permit the registration of stresses, strains, velocities, etc., along with the usual D.C. or A.C. phenomena.

The recorder and amplifier units of which the above models are comprised are also available separately.

SANBORN AMPLIFIER-RECORDERS



MODEL 128 SINGLE CHANNEL

MODEL 67 MULTI-CHANNEL

For complete catalog giving tables of constants, sizes and weights, illustrations, general description, and prices, address:

SANBORN COMPANY
Industrial Division
CAMBRIDGE 39, MASS.

Sanborn Recorders and Amplifiers have evolved from those originally designed by Sanborn Company for use in electrocardiographs, and have, by actual practice, proven to have wide applications in the industrial field as well.

averages computed by many workers during the past 25 years.

The basis of the measuring system is a microwave cavity whose dimensions are known down to the millionth part of an inch. These accurate dimensions, and an accurate measurement of the resonant frequency of the cavity, allow calculation of the speed with which radio waves, and thus light waves, travel.

To allow the extremely accurate determination of cavity dimensions, contour maps of the covers of the cavity were made to allow mathematical calculation of any deviations that might occur. Spacer rods, which hold the cover in place, are measured with an accuracy that permits calculation of their dimension changes, down to the tenthousandth of an inch, when compressed by the weight of the disc cover. The rods themselves had to be equal within a few millionths of an inch. The temperature of the room in which the measurements are made is held to within 0.01 degree C.

The development work on the new sytem took five years. The actual measurement process is relatively simple, once the equipment is set up. The photograph shows Edward Ginzton and Arthur W. Hornig positioning the equipment to measure the inside dimensions of the microwave cavity.

Ratio and Product Control By Shield-Grid Thyratrons

By Charles F. Spitzer
Yale University
New Haven, Connecticut

In many instances of process control, it is desirable to actuate a relay or to trigger an indicating circuit whenever the ratio of two quantities deviates from a preset value. In other instances it may be desirable to maintain the product of two quantities constant and to obtain an indication if a certain limit has been exceeded. These results are readily obtained through the use of a shield-grid thyratron. The 2D21 thyratron has been chosen in the following investigation since its miniature design and relatively

For Negative Resistance-Voltage Characteristics

GLOBAR
TRADE MARK

TYPE BNR RESISTORS

Responding instantly to voltage changes, GLOBAR type BNR Silicon Carbide Resistors provide increased resistance as a potential is decreased. Conversely, as a potential is applied, resistance decreases. These resistors are what is commonly referred to as voltage sensitive. They are used to dampen the effect of transient voltages and provide instant protection for electrical circuits.

Bulletin GR2 contains useful engineering data on GLOBAR BNR Ceramic Resistors. Copies will be supplied immediately upon request. Write Dept. V-11, The Carborundum Company, GLOBAR Division, Niagara Falls, N. Y.

Typical applications where these resistors operate successfully include:

1. Small motors to prevent arcing of governor contact points.
2. Stabilizing rectifier circuits by limiting peak voltages.
3. Voltage control circuits in electronic devices.
4. Protection of solenoids in direct current circuits.

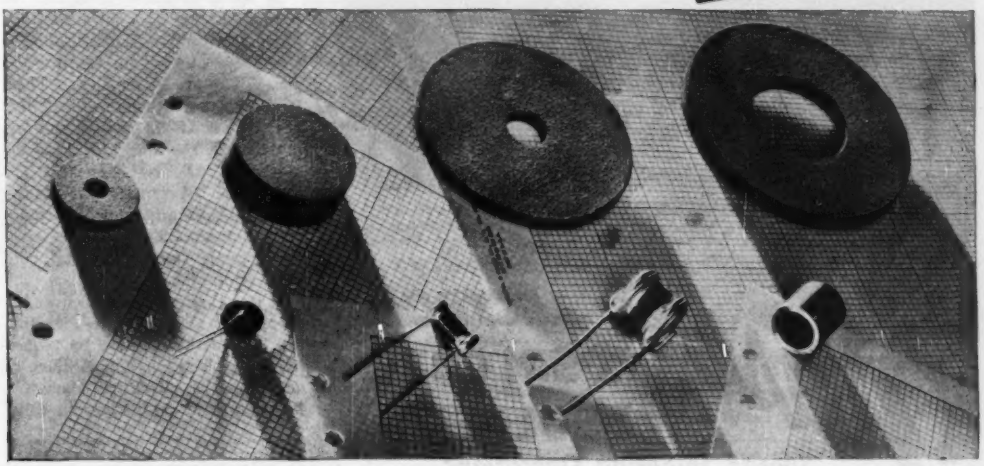

Resistors of this type are readily made to meet exact specifications. Working samples are available when necessary. To be sure of receiving resistors made to correct specifications, the following information should be furnished:

a. Type of apparatus in which resistors are to be used.
b. Method of mounting and space limitations.
c. Normal operating voltage and peak voltage if available.
d. Resistance and inductance of the circuit if available.
e. Ohmic resistance of the resistor and allowable plus or minus tolerance.
f. Maximum voltage applied continuously or intermittently.
g. Duration of load and elapse of time between applications.

Furnishing these data will also avoid unnecessary delay and confusion.

GLOBAR Ceramic Resistors
BY CARBORUNDUM
TRADE MARK

"Carborundum" and "Globar" are registered trademarks which indicate manufacture by The Carborundum Company, Niagara, Falls, N. Y.

Glaser LECTRON ROSIN CORE SOLDER

Speeds Soldering Operations on the Production Line

Many manufacturers in the radio, electronic, and television industries do not gaze into a crystal ball to discover why their soldering operations show a 15% increase in speed. They know, GLASER LECTRON ROSIN CORE SOLDER, made with an exclusive activated rosin flux, is the reason for this speed-up in production.

GLASER LECTRON ROSIN CORE SOLDER bonds copper and brass perfectly and permanently—yet is non-corrosive and non-conductive. Superior to any other activated rosin core solder made.

Profit from the experience of the many economy minded manufacturers. Speed up work on your production line—insist on a proven leader, GLASER LECTRON ROSIN CORE SOLDER.

The Quality Line

GLASER PLASTIC ROSIN CORE SOLDER has gained a well deserved leadership in the industry because of its highest standard of quality. Both GLASER LECTRON ROSIN CORE and GLASER PLASTIC ROSIN CORE SOLDERS are made of the purest virgin tin, lead and perfect flux and are available in any tin-lead alloy and wire gauge.

OTHER GLASER PRODUCTS
Glaser Solder Preforms, Glaser Bar, Ingot or Solid Wire Solder. Glaser Fluxes for every purpose.

Our Engineering Department will gladly assist you with any soldering or flux problem, without obligation.

GLASER LEAD CO. INC.
21-31 WYCKOFF AVENUE BROOKLYN 27, N. Y.

RENDERING DEPENDABLE SERVICE TO AMERICAN INDUSTRIES SINCE 1922

large current carrying capacity (100 ma continuously) make it particularly suitable for compactly built control devices.

Ratio Limiting

The characteristic curves of the tube under consideration are shown in Fig. 1. In the region above each curve the tube conducts, and below each curve it remains cut off.

For a plate voltage of 300 volts, the characteristic consists of three nearly straight lines, marked a, b and c. Line a has a small slope ($= -0.25$) while line b has a fairly steep slope ($= -7.65$). Line c merges into line b, and has a somewhat steeper slope than the latter.

If it is desirable to obtain an indication that the ratio $\Delta E_g/\Delta E_p$ has exceeded a certain value, a static operating point P may be chosen (by proper biasing). Then, if operation takes place along line b, that is if ΔE_p is positive and ΔE_p is negative, the tube will fire if the ratio $\Delta E_g/\Delta E_p$ has exceeded the value 7.65. Other ratios are readily available through the use of attenuators (or amplifiers) for the original signals from which ΔE_p and ΔE_g are obtained.

If less than optimum accuracy is permissible, the range of operation can be greatly extended by replacing lines b and c by a single line of average slope. This will allow ΔE_p to swing over more than 40 volts,



Fig. 1—Characteristics of a 2D21 thyratron, with d-c on the plate. For ratio control the static operating point is chosen at P, Q_1, Q_2 or Q_3, whichever the problem demands. For product control operating point is set at R or S

NEW! FREQUENCY AND TIME MEASUREMENTS ACCURATELY . . . CONVENIENTLY

FREQUENCY RATIO MEASUREMENTS

DIRECT RPM READING TACHOMETER

SECONDARY FREQUENCY STANDARD

using $f\frac{n}{t}$

ANY FACTOR MAY BE MEASURED FOR FIXED VALUE OF THE OTHER

FREQUENCY MEASUREMENTS

TIME INTERVAL MEASUREMENTS

TOTALIZING COUNTER

The Universal 6-IN-ONE MEGACYCLE FREQUENCY-TIME COUNTER

Now, the Potter Instrument Company offers all-in-one equipment, the features heretofore available only in separate counting systems. Two complete counting channels, a 100 kc crystal oscillator time base and unique gating circuits are combined to provide the new FREQUENCY-TIME COUNTER.

by Potter

FREQUENCY MEASUREMENTS	0 to 1 mc range by counting cycles per pre-selected time or by measuring time per pre-selected count. Accuracy 0.001% minimum.
TIME INTERVAL MEASUREMENTS	0 to 10 seconds ± 10 micro-seconds.
FREQUENCY RATIO MEASUREMENTS	Ratio of two external frequencies can be measured.
SECONDARY FREQUENCY STANDARD	100 kc crystal oscillator with divided frequencies available at 10, 1 kc and 100, 10, 1 cps.
TOTALIZING COUNTER	Six decades, pulses 0 to 1 mc, sine wave 10 cps to 1 mc.
DIRECT RPM READING TACHOMETER	Through the use of an external 60 count per revolution photoelectric disc generator an accuracy of ± 1 rpm is obtained.

FEATURES

WIDE FREQUENCY RANGE — Pulses 0 to 1 megacycle — sine waves from 10 cps to 1 mc.

EXTREMELY HIGH ACCURACY— 0.001% from 0 to 1 megacycle.

VERSATILITY— Frequency measurements, time intervals, frequency ratios, high speed counting, rpm measurements, and a secondary frequency standard — all in one instrument.

RAPID MEASUREMENT— No adjustments or interpolations — only a few seconds for a complete measurement.

DIRECT DECIMAL READING — Frequency or time displayed on six Potter Counter Decades using the 1-2-4-8 large neon glow lamp decimal indication. Readable even under high ambient illumination.

AUTOMATIC OR MANUAL RECYCLING— The counter will retain the measurement until reset or will automatically recycle after displaying the measurement for a selected time.

NO ADJUSTMENT— Stable decade counter frequency dividers, rather than multivibrators are used to establish the precise time base.

DEPENDABLE — The exclusive four-lamp Potter decades provide a direct on-off indication of the counter stages without the complexity and unreliability of a readout matrix. An associated glow lamp for each tube in the counting and dividing circuits simplifies tube servicing.

PERMANENT RECORD— Other versions of the Frequency Time Counter can be supplied with high speed recording devices.

INSTRUMENT COMPANY

POTTER INSTRUMENT COMPANY

INCORPORATED

115 CUTTER MILL RD., GREAT NECK, NEW YORK

with a corresponding ΔE_c of nearly 5 volts.

If Q_1 is chosen as the static operating point and operation takes place along line *a*, that is, again, if ΔE_c is positive and ΔE_b is negative, the tube will fire if the ratio of $\Delta E_c/\Delta E_b$ exceeds the value 0.25. Again, other ratios are readily available through the use of attenuators (or amplifiers for the signals from which ΔE_c and ΔE_b are obtained. In general, point *P* and line-*b* operation are preferable if the ratio to be indicated is greater than unity, while Q_1 and line-*a* operation are better suitable for ratios of less than unity.

If it is desirable to obtain an indication that the ratio $\Delta E_c/\Delta E_b$ has *dropped* below a certain value, point *P* and line *a* operation may be chosen (ΔE_c negative and ΔE_b positive). The tube will then fire if $\Delta E_c/\Delta E_b$ drops below the value 0.25, with other ratios obtainable through attenuators or amplifiers.

If point Q_2 and line-*b* operation are chosen (ΔE_c negative and ΔE_b positive), the limiting ratio will be 7.65 and the tube fires if the signal ratio is less than this value with other ratios becoming available, as before, through attenuators or amplifiers. If less than optimum accuracy is permissible, lines *b* and *c* can again be merged and their slopes replaced by an average value. In this manner the operating range is greatly extended. For ratios below unity, operating point *P* should be used, while for ratios above unity operating point Q_2 is more suitable.

Ratio Limiting Applications

One application of this circuit might be to indicate whether the percent distortion of an amplifier exceeds a certain value. Through the use of two such circuits, the ratio of two quantities can be kept within close limits; in this case one circuit operates when the ratio drops below the preset value, the other when the ratio exceeds it. Thus, liquid mixtures of two components may be accurately controlled by automatically adjusting the flow of each component liquid, for example.

It is particularly noteworthy that the response of the tube appears

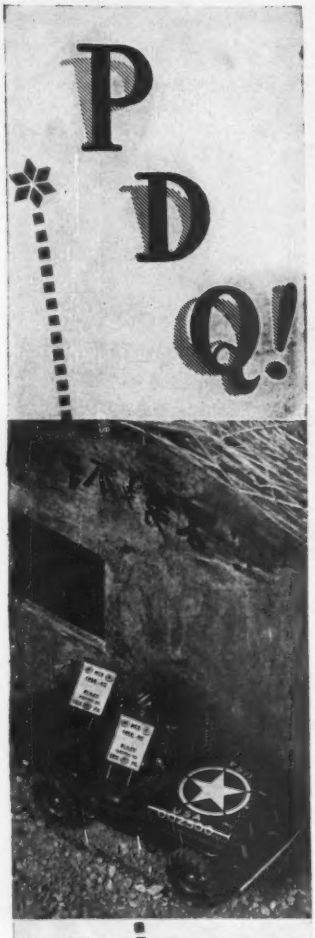

Shown: Bliley Type MC-9

Production...
Delivery . . . Quality!

Three qualifications are needed to assure performance on your orders. PRODUCTION facilities . . . keyed to your DELIVERY dates . . . plus rigid QUALITY control. These factors are *basic with Bliley* . . . top choice for 20 years.

Bliley CRYSTALS
BLILEY ELECTRIC COMPANY
UNION STATION BUILDING
ERIE, PENNSYLVANIA

FLEXLOC

SELF-LOCKING NUTS
can't work loose, either

FLEXLOCs always STAY LOCKED, regardless of vibration. They're one-piece, all-metal, have nothing to lose or forget. Temperatures to 550° F. don't bother them, and you can use them again and again with no appreciable loss of torque.

Write for latest bulletin and free samples.

FLEXLOC Self-Locking Nut, "regular" type.

SPS

STANDARD PRESSED STEEL CO.
JENKINTOWN 10, PENNSYLVANIA

The RCA "TV Duo"...

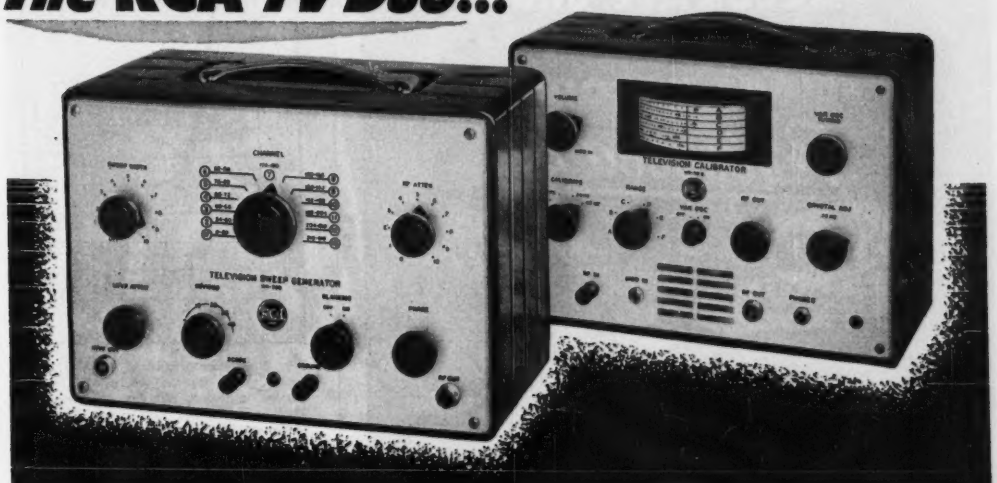

...the last word in *precision* and *versatility*

RCA WR-59B Television Sweep Generator

What it does—Provides fast and accurate sweep alignment and trouble shooting of TV front ends . . . sound and picture if amplifiers . . . discriminators and ratio detectors . . . trap circuits . . . video amplifiers . . . and if amplifiers in FM sets.

What it features—Preset switch positions for TV channels 2 to 13 . . . continuous tuning from 300 kc to 50 Mc . . . flat output, within ±1.5 db even at maximum sweep width . . . fundamental oscillator output on all TV channels . . . filtered beat-frequency-fundamental output on if/vf range . . . zero-voltage reference line provided by return-trace blanking . . . dual piston attenuator with maximum attenuation ratio of 20,000 to 1 . . . continuously variable sweep width up to 10 Mc . . . output frequency-modulated at the fundamental frequency by a precision-type vibrating capacitor, for long life and good linearity . . . balanced rf output cable terminated in 300 ohms . . . fully shielded circuits and filtered power line . . . resistance-terminated if/vf output cable.

For complete details ask your RCA Test Equipment Distributor for Bulletin 2F753.

"Scope pattern of dual markers for rf picture and sound carriers, produced by the "TV Duo."

RCA WR-39B Television Calibrator

What it does—Provides dual markers for rf picture and sound carriers . . . provides signals for peak alignment of stagger-tuned if amplifiers . . . develops vertical bar pattern for horizontal linearity adjustments . . . generates a crystal-controlled AM signal for alignment of inter-carrier sound if's . . . provides triple markers for sound discriminator adjustment . . . allows adjustment of local oscillators in TV front ends with crystal accuracy . . . checks reception on all 12 channels by means of video signal obtained from single channel of a TV set.

What it features—Variable-frequency oscillator operating on fundamentals over entire range . . . sound and picture carrier frequencies marked on expanded, easily-read scale . . . two crystal oscillator stages with 3 crystals supplied . . . wide-band modulator stage with range of 0 cps to 30 Mc . . . crystal standard supplying over 600 calibration check points at 0.25-Mc intervals . . . bar-pattern generator for linearity adjustments.

For complete details ask your RCA Test Equipment Distributor for Bulletin 2F751.

Available from your RCA Test Equipment Distributor

RADIO CORPORATION of AMERICA

TEST EQUIPMENT **HARRISON, N. J.**

ACCURATE and DEPENDABLE FLIGHT RECORDS Protected by

LORD MOUNTINGS

BONDED RUBBER

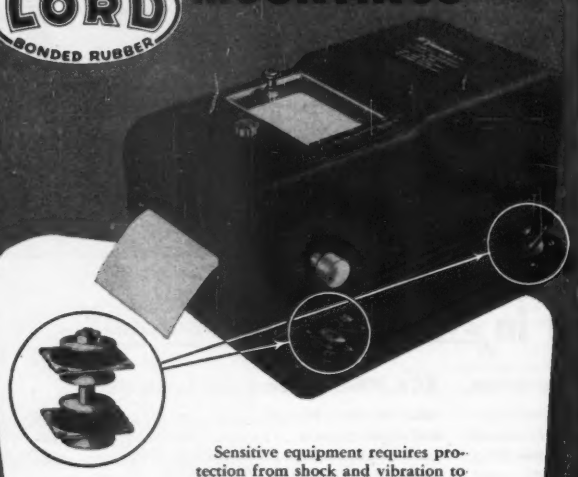

Sensitive equipment requires protection from shock and vibration to assure original accuracy and dependability. The Giannini Flight Recorder illustrates how the G. M. Giannini Company of Springfield, N. J., uses LORD Mountings to insure the precise recordings of four simultaneous test operations.

Note that standard LORD Mountings are used in tandem to supply universal freedom of movement . . . and that they are focalized at the center-of-gravity of the recorder. This arrangement of LORD Mountings permits the instrument to be used in either vertical or horizontal position without loss of mounting effectiveness.

This method of applying LORD Mountings was recommended by LORD engineers to meet the particular conditions under which the instrument would operate. If you have a problem involving product protection or improvement through control of vibration, we suggest that you submit it to us for analysis and recommendation. Write to attention of Product and Sales Department.

LORD MANUFACTURING COMPANY · ERIE, PA.

Canadian Representative: Railway & Power Engineering Corp. Ltd.



Fig. 2—Characteristics of a 2D21 thyratron, with a-c on the plate. These curves are very similar to those of Fig. 1, illustrating that either type of plate excitation is suitable for ratio or product control

relatively independent of the plate voltage between 150 and 300 volts, (and probably above) as reference to Fig. 1 discloses. Thus, small variations in plate supply voltage have almost no effect on the slopes of lines *a*, *b* and *c*, or on the location of the operating point.

Product Limiting

Again referring to Fig. 1, it is noted that the characteristic curve for a plate voltage of 25 volts has a very noticeable bend near the point ($E_s = 12, E_g = -2$). Over a certain range, this characteristic is very nearly hyperbolical with asymptotes intersecting at $R(E_s = -4.3, E_g = +10)$. The equation of this hyperbola is approximately $E_sE_g = 7$ between the points ($E_s = -3.2, E_g = +18$) and ($E_s = +3; E_g = +11$). An operating point is then chosen near R such as to keep the tube extinguished if the product E_sE_g is less than 7. If the characteristic curve for a plate voltage of 50 volts is chosen, a very similar result is observed.

The equation of the curve is again very nearly $E_sE_g = 7$, but over a smaller range. The points ($E_s = 3.3, E_g = +18$) and ($E_s = -1.0, E_g = +11.4$) limit hyperbolic operation. The asymptotes intersect at $S(E_s = -4.1, E_g = +9)$ and an operating point is chosen near this point.

It is clear that products other than E_sE_g can again be readily

This, we can't quite do!

But TUNG-SOL does make electron tubes that accurately synchronize the television receiver with the transmitter—cathode ray tubes that present a picture of unexcelled clarity.

How well we do it, is indicated by the fact that TUNG-SOL tubes meet fully the performance requirements of every leading television set manufacturer.

There is no mystery to the source of TUNG-SOL quality. We just work hard at it. Raw materials are carefully inspected—thoroughly tested. Then, using the most modern statistical quality control methods, TUNG-SOL produces tubes to standards of uniformity and reliability that are unsurpassed in the electronic industry.

Finally, before any tubes can be shipped, they must be certified by TUNG-SOL'S Quality Control Department. This means a complete re-check of each day's output to make certain of a strict adherence to specifications. Every TUNG-SOL tube is made to back up the TUNG-SOL slogan—"Make the best that can be Made."

If you use electron tubes for radio, television, or special-purpose applications, we'd like to have the opportunity of demonstrating the many advantages of doing business with TUNG-SOL.

TUNG-SOL LAMP WORKS INC., Newark 4, N. J.
Sales Offices: Atlanta, Chicago, Dallas, Denver, Detroit, Los Angeles, Newark



Quality is built-in, not "tested-in." Nevertheless, the guarantee of built-in quality is unlimited testing. Here is one of TUNG-SOL'S numerous and exacting quality control tests—the chemicals used in the screen of the TUNG-SOL TV picture tube are analyzed in the spectograph to determine purity.

FOR RADIO, TV AND SPECIAL PURPOSES

For High Temperature, Space-Saving

HOOK-UP WIRE...

Specify Rome Synthinol* 901

Here's the answer to your space problem . . . a radio and television hook-up wire with an *8 mil wall*. Insulated with Rome Synthinol 901 thermoplastic compound, plus nylon sheath or lacquered braid, it is fully Underwriters approved for *continuous operation at 90° C.*, above or below the chassis, in approved applications. Available in sizes 24 AWG to 16 AWG, it replaces heavier, space-consuming 1/64" and 1/32" insulations.

For Space Savings Compare These Diameters:

Tinned Conductor Size	Maximum Diameter Over Nylon Sheath (Inches)
24 AWG Solid	.051
24 AWG 7/.0079	.055
22 AWG Solid	.056
22 AWG 7/.010	.061
20 AWG Solid	.063
20 AWG 10/.010	.069
18 AWG 16/.010	.088
16 AWG 26/.010	.100

Available in a wide range of colors, Rome Synthinol 901 insulation has these advantages:

Increased resistance to heat deformation • Excellent heat aging properties • Increased resistance to oils, chemicals, greases, moisture and flame • Clear, permanent colors • Improved solderability • Improved space factor.

Whatever your requirements, including military types, look to Rome Cable for electronic wires of quality you can depend upon.

IT COSTS LESS TO BUY THE BEST

*T.M. Reg.

ROME CABLE CORPORATION
Dept. E-1 • Rome, N. Y.

Please send me your Radio Wiring Bulletin.

Name.....
Company.....
Address.....
City.....State.....

ROME CABLE CORPORATION
ROME, NEW YORK

obtained by the use of amplifiers or attenuators preceding this product-limiting stage.

Since the control grid and shield grid lose control once the plate circuit of the thyratron conducts, it is necessary to reset the device by opening the plate circuit. It has been further observed that above a grid voltage of about 12 volts interruption of the plate circuit does not extinguish the tube. The reason is evidently that the control grid-cathode circuit is ionized and remains so unless it also is opened.

Figure 2 shows the characteristics of the 2D21 thyratron when the plate is supplied from a-c. Otherwise, the circuit is the same as that of Fig. 1. As will be noted, the curves are very similar to those of Fig. 1. Thus, when using the circuit for ratio limiting (and if the control grid voltage is kept below 12 volts), resetting takes place automatically. In this form the circuit lends itself exceptionally well to use in continuous control devices. If the control grid voltage exceeds 12 volts a hysteresis effect is observed which necessitates the opening of the control grid circuit to reestablish control. The reason is, as before, that the control-grid-cathode circuit remains ionized, otherwise.

The ability of a thyratron to fire when the E_c/E, ratio deviates from a preset ratio was used in a device designed to measure the ratio of voltages which were, in turn, determined by the high and low frequency content of a signal. In this arrangement it gave satisfactory service over an extensive period of use. It must be realized that tube replacement will require recalibration of the device, in general.

ERRATUM NOTICE:

IN the September *Electron Art* department, an error was made in crediting the development of the "Electrodynamic Ammeter for VHF". This was called to our attention by H. R. Meahl, of the General Electric Company. In accordance with his request, this notice is being published, calling attention to his letter which appears in this month's *Backtalk* department.

DUMONT

TYPE S DURENE PLASTIC FILM CAPACITOR



DUMONT "ZERO-LOSS" DURENE CAPACITORS

TYPE S1 IN TUBES

- EXCELLENT POWER FACTOR .0005
- CAP. FROM .00005 to 20 MFD



- PLASTIC FILM IDEAL SUBSTITUTE FOR MICA OR CERAMIC CAPACITORS

TYPE S2 IN CANS

- VOLTAGES FROM 500 to 20000 VOLTS

EXTREMELY HIGH "Q" MOISTUREPROOF STABLE CAPACITY RANGE LONG LIFE

Leakage Resistance ½ Million Megohms

SEND FOR SAMPLES AND LITERATURE

FOR DEPENDABILITY ALWAYS SPECIFY **DUMONT**

DUMONT ELECTRIC CORP.
MFR'S OF CAPACITORS FOR EVERY REQUIREMENT
308 DYCKMAN ST. NEW YORK N Y

automatic slideback peak pulse

VOLTMETER

Far more versatile than conventional types, the C.G.S. peak pulse voltmeter reads *rapidly* and *accurately* on pulse widths of .25 microseconds and at repetition rates of 10 pps. The instrument reads on either positive or negative pulses. Controls include an on-off, range selector and input polarity switch; zero set control. A switch which throws a D.C. restorer into the circuit provides accurate peak to peak measurements of sine and square waves.

SPECIAL FEATURES—

- Wide Voltage Range — 5 scales from .10 to 5000 volts full scale.
- Pulse Width 0.25 microseconds to 50 milliseconds.
- Accuracy ±3% of full scale.
- Input Impedance 200,000 ohms.

Write for Catalog Sheet Giving Full Information — Or Contact Us Concerning Your Own Individual Problems. Our Staff is at Your Service. Write Dept. A

CGS **C. G. S. LABORATORIES, INC.**
LUDLOW STREET STAMFORD, CONNECTICUT

E-I HERMETIC SEALING COMPONENTS

Announcing: **AN IMPORTANT ADDITION TO THE E-I FAMILY OF SEALED LEADS—**



NEW R and RR SERIES TERMINALS

A completely new line of double barrel terminals that provide added protection against flashover without any appreciable increase in terminal size. The double barrel results in a longer leakage path on both ends of the terminal while the upper barrel increases the mechanical strength of the terminal and facilitates soldering. For information call or write today.

Write for These Descriptive Bulletins:

- **849 — Hermetically Sealed Terminals**
- **850 — Hermetically Sealed Headers**
- **851 — Gasket Type Bushings**

E-I INC. ELECTRICAL INDUSTRIES INCORPORATED
44 SUMMER AVENUE • NEWARK 4, N. J.

Timing Ideas

PRECISION PERFORMANCE

Manufacturers, recognizing that components of quality insure outstanding product performance, look to Haydon® at Torrington for timers and timing devices. All Haydon timers are made with the same precision as the Haydon motor — your guarantee of satisfactory performance. If you need a special design, you'll find Haydon's extensive engineering and development facilities without equal for service and results.

A few examples of basic Haydon timing units are featured below.



SERIES 8010 INTERVAL TIMER WITH BUZZER

Compact, low cost timer for volume production. Wide range of intervals. Audible (buzzer) signal optional. Quick break. Load contact rated 10A, ½ HP 250 VAC.

SERIES 8006 INTERVAL TIMER

Designed for heavy duty, this unit is available in quantities in standard models. Wide range of intervals. HOLD feature optional. Quick break. Totally enclosed. Switch rated 28A, 1 HP 250 VAC.

SERIES 5900 TIME DELAY RELAY

For use where positive, accurate time delay relay is imperative. Automatic reset. Fixed models for volume production; adjustable models in 4 delay ranges for general use.



SERIES 5700 ELAPSED TIME INDICATOR

Synchronous timing motors with cyclometer type counters for metering elapsed time. Rugged models for wide range of timing, recording operations; in several registers, resettable or non-resettable.

● TRADE MARK REG. U.S. PAT. OFF.

For complete design and engineering specifications, write for catalog: Timing Motors No. 322 — Timers No. 323 — Clock Movements No. 324. Yours without obligation.

HAYDON AT TORRINGTON

HEADQUARTERS FOR **TIMING**

HAYDON Manufacturing Co., Inc.
2425 ELM STREET
TORRINGTON, CONNECTICUT
SUBSIDIARY OF **GENERAL TIME** CORPORATION

voltage supply that is continuously variable from 100 to 325 v and delivers from 0 to 150 ma, with a ripple of less than 5 mv; and a bias supply that is continuously variable from 0 to 150 v and delivers 5 ma. Its a-c output is 6.3 v, 10 amperes, center-tapped, unregulated.



Cavity Frequency Meters

SPERRY GYROSCOPE CO., Great Neck, N. Y. The cavity frequency meters illustrated are low-Q broadband instruments designed for both transmission and absorption indications. They are extremely useful for general search-type frequency measurements in the laboratory and in the field; and may also be used for setting oscillators and signal sources to a predetermined frequency with an accuracy of 0.1 percent. Model 348 is designed for the 13,000 to 18,000-mc range; model 349—19,000 to 26,000 mc; and model 350—26,500 to 39,000 mc. Each model consists of a cylindrical cavity with one end joining the broad side of a standard section of waveguide. The cavity is tuned by means of a plunger which is driven by a micrometer head. Individual calibration curves are furnished with each instrument.



Recording Instruments

MILLIVAC INSTRUMENT CORP., P.O. Box 3027, New Haven, Conn., has

available a series of direct-reading recording instruments of unusual voltage and current sensitivity. The MR-61A has a sensitivity of 3×10^{-12} amperes per mm of deflection; the MR-67A has 20 μv per mm and an input impedance of 6 megohms; and the MR-65A, a maximum sensitivity of 0.2 μv per mm with an input impedance of 1,000 ohms. Chart width is 5 centimeters. Standard paper speeds are 25 and 10 mm per second. Frequency range is d-c to 20 cycles for the 61A and 67A, and d-c to 10 cycles for the 65A, all within 3 db.

Ultrasonic Generator

MASSA LABORATORIES, INC., 5 Fottler Rd., Hingham, Mass. Model GA-1010 ultrasonic equipment has been made available to meet the demands of industrial laboratories where the higher frequency quartz crystals were not found satisfactory. It includes a 1-kw magnetostriction transducer, operating at approximately 24 kc and having an exposed flat vibrating surface of 20 sq cm. The structure is oil filled and is provided with a water-cooled radiator to permit the continuous long-time operation of the apparatus without harmful temperature rise. The ultrasonic power supply equipment for operating the transducer is operated from 115-v, 60-cycle power mains. In addition to safety interlocks and relays, the

Timing Ideas

A BEAR FOR PUNISHMENT



IF you're looking for a rugged, heavy duty interval timer, this Haydon® unit will save you time and money. It will meet every test for stamina, dependability and efficiency; is designed as a versatile, multi-purpose unit. Whatever your need for an interval timer may be, see the Haydon Series 8006 first.

CHECK THESE 8006 FEATURES

1. Standard models for intervals of 1, 15, 60 and 180 minutes; dial and knob optional. 2. Other models for intervals up to 24 hours or more are available, without dial or knob. 3. HOLD feature furnished if wanted. 4. Heavy duty switch is rated 28A, 250 VAC; 1 HP 250 VAC. 5. Heavy contact pressure; ample follow-through is assured. 6. Snap action device gives quick, positive break. 7. Removable dust cover for timer; totally enclosed motor. 8. Settable in either direction, to start or when operating. 9. May be used under conditions of high temperature and humidity.

ALL HAYDON TIMING DEVICES GIVE YOU

these advantages of the dependable Haydon Motor: Total enclosure — Very small size — Slow (450 rpm) rotor for long life, quiet operation — Controlled lubrication with separate systems for rotor and gear train — Mounting and operation in any position.

® TRADE MARK REG. U.S. PAT. OFF.

For complete design and engineering specifications, write for catalog: Timing Motors No. 322 — Timers No. 323 — Clock Movements No. 324. Yours without obligation.

HAYDON AT TORRINGTON

HEADQUARTERS FOR TIMING

HAYDON Manufacturing Co., Inc.

2425 ELM STREET

TORRINGTON, CONNECTICUT

SUBSIDIARY OF GENERAL TIME CORPORATION

EISLER
Television Tube MACHINERY





No. 102-VID

- ECONOMICAL
- MODERN DESIGN
- PRODUCTION ENHANCING

No. 57-8-4 CT

EISLER'S Electronic Equipment is especially Designed and Built to your exact requirements.
From 5" to huge 24" Television Tube

RESISTANCE WELDERS
•
¼ to 300 KVA

EISLER specializes in GLASS WORKING MACHINERY for the manufacture of: Cathode Ray; Radio Tubes (Standard, Miniature, Sub Miniature); Fluorescent Lamps; Glass Ampoules; Vials; Incandescent Lamps.

No. 57-VID

EISLER TRANSFORMERS
STANDARD • SPECIAL
Air, Oil or Water Cooled
•
Sizes From ¼ to 500 KVA

• Consultation without any obligation on your part is cordially invited.

EISLER ENGINEERING CO., INC.
751 SOUTH 13th ST. • NEWARK 3, NEW JERSEY

TOUGH...

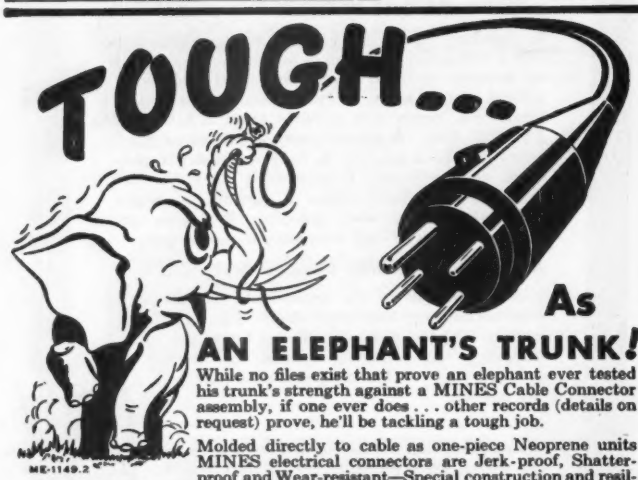

ME-1149.2

As AN ELEPHANT'S TRUNK!

While no files exist that prove an elephant ever tested his trunk's strength against a MINES Cable Connector assembly, if one ever does . . . other records (details on request) prove, he'll be tackling a tough job.

Molded directly to cable as one-piece Neoprene units MINES electrical connectors are Jerk-proof, Shatter-proof and Wear-resistant—Special construction and resilient rubber mounting of pins and spring loaded sockets insure a long life of low contact resistance — and the famous MINES Water-Seal automatically protects connections from dirt, oil or water.

A wide variety of sizes, shapes and pin combinations are available to meet the portable power requirements of TV, FM, AM or PA Circuits. No. 4A093 Male plug illus.

Consult a Joy Engineer

MINES EQUIPMENT — MINES — Division
JOY MANUFACTURING COMPANY
HENRY W. OLIVER BLDG. PITTSBURGH 22, PENNA.

Titeflex

FLEXIBLE WAVEGUIDES
Save Money
IN VIDEO TRANSMISSION



Titeflex Waveflex Waveguides used in television transmission. Assembled lengths of Waveflex over 30 feet long connect movable antenna with transmitter inside building. Antenna is directed at Empire State Bldg. faintly visible in background.

Titeflex Waveflex Waveguides give you all the advantages of rigid waveguides *plus* the additional feature of flexibility. Complicated bends and twists can be made with virtually no change in electrical properties . . . installation costs are lowered . . . design problems are simplified. Waveflex Waveguides are made in many standard types to Army-Navy specifications—or our engineers will develop special styles for you.

Write for
COMPLETE WAVEFLEX CATALOG

TITEFLEX, INC.
500 Frelinghuysen Ave., Newark 5, N. J.

power supply includes dials for adjusting the frequency and output.



Phase Meter

THE W. L. MAXSON CORP., 460 W. 34th St., New York 1, N. Y. Model P-1060 phase meter, originated as an aid to design of single-sideband transmitters by the U. S. Air Force, provides means for precise determination of phase relationships throughout the audio spectrum of 30 to 20,000 cps. The instrument is accurate to 0.1 degree. Its self-calibrating feature permits the operator quickly to check accuracy without recourse to complex calibrating apparatus and techniques. The power supply for the electron-tube circuits is integral with the instrument chassis. It is designed to operate from an unregulated 105 or 125-volt, 60-cycle circuit.



Oscillograph Tube

RADIO CORP. OF AMERICA, Harrison, N. J. Model 7JP1 is a 7-in. c-r tube of the electrostatic focus and deflection type designed to provide excep-

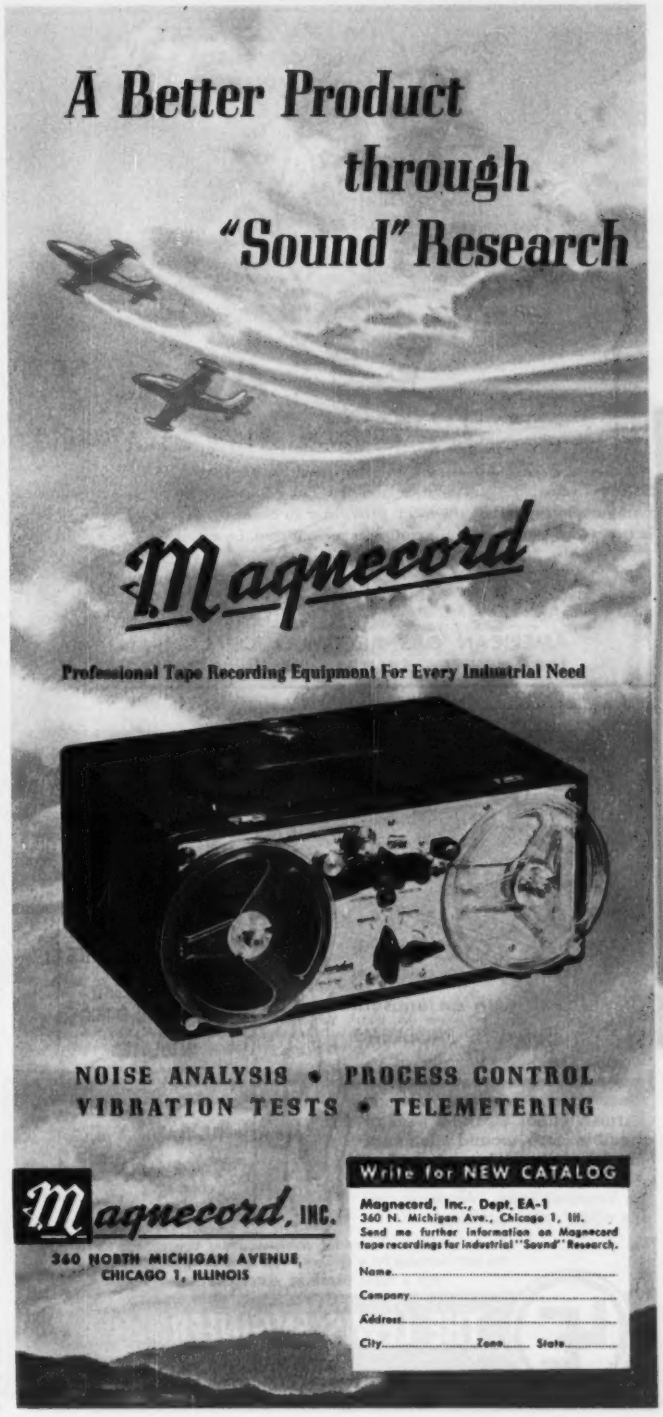
A Better Product through "Sound" Research
Magnecord
Professional Tape Recording Equipment For Every Industrial Need
NOISE ANALYSIS • PROCESS CONTROL
VIBRATION TESTS • TELEMETERING
Magnecord, INC.
360 NORTH MICHIGAN AVENUE
CHICAGO 1, ILLINOIS
Write for NEW CATALOG
Magnecord, Inc., Dept. EA-1
360 N. Michigan Ave., Chicago 1, Ill.
Send me further information on Magnecord tape recordings for industrial "Sound" Research.
Name
Company
Address
City Zone State

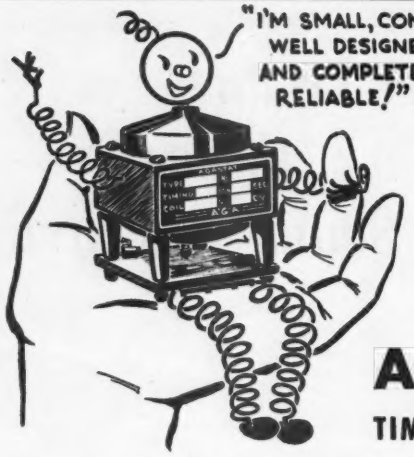

AGASTAT

TIME DELAY RELAY

Solenoid actuated – pneumatically timed. For AC and DC service. A special diaphragm and cap encase the head, providing an enclosed, dustproof timing chamber in which the air used for timing is recirculated. Low cost with dependability.

AGA AIRPORT LIGHTING · AGA SUNSCHEIN REFLECTORS · AGA MARINE LIGHTING EQUIPMENT · AGA AGASTAT TIME DELAY RELAYS

AMERICAN GAS ACCUMULATOR COMPANY

1027 NEWARK AVENUE • ELIZABETH 3, N. J.

HEAT RESISTANT WIRES FOR EVERY APPLICATION . . .

Are you concerned with an unusual HEATING PROBLEM?

We make a specialty of insulated resistance wire. Perhaps we can help you. We can furnish either straight wire or flexible core wound elements. Our heat resisting insulations are supplied in glass, asbestos or combinations. Write or call us about your problem.

- HEATING UNITS
- HEATING ELEMENT
- RESISTANCE LINE CORD
- THERMOCOUPLE WIRE
- ASBESTOS LEAD & FIXTURE WIRE
- INSULATED RESISTANCE WIRE
- FIBERGLAS INSULATED WIRE
- WIRE TO ANY SPECIFICATIONS

Send your electronic control, communications or appliance wiring specifications for a recommended solution by our engineers.

FOR A TRIAL ORDER OR A CARLOAD *consult*

THE LEWIS ENGINEERING CO.

Wire Division

NAUGATUCK CONNECTICUT

Watch This Spot! *for* PICTORIAL NEWS OF THE WORLD'S FINEST HERMETIC SEALS

• JANUARY, 1950 •



Quality plus unlimited shapes

The only seals you can hot tin dip at 525°F. for easy assembly soldering, for a strain and fissure-free sealed part with resistance of over 10,000 megohms!

Hermetic headers withstand high vacuum, high pressure, temperature cycling, salt water immersion and spray etc., and are used extensively by America's leading industries and government agencies.

TERMINALS AND HEADERS ARE AVAILABLE IN RMA COLOR CODE

Free!

Write for your copy of the most complete catalog ever produced on hermetic seals.

HERMETIC SEAL PRODUCTS COMPANY

31-33 So. Sixth St., Newark 7, N.J.

tional brightness when operated with an anode-No. 2 voltage near the maximum of 6,000 v, and good brightness at anode-No. 2 voltages as low as 1,500 to 2,000 v. It uses an electron gun which has a grid No. 2 operated at anode-No. 2 potential so that the beam current and grid-No. 1 cutoff voltage will not be affected by focusing adjustment. The gun also has an anode No. 1 which takes negligible current.



Marine Radios

STANDARD ELECTRONICS CORP., 25 W. 43rd St., New York 18, N. Y., is producing four types of marine radios ranging in power from 12 to 80 watts and designed to cover pleasure and commercial craft requirements. The 12-watt unit for small boats includes a standard broadcast band that can pick up all radio broadcasts available from shore. Another model, 15 in. wide × 9 in. deep, operates at 35 watts and has 5 channels. The 50 and 80-watt units both have six transmitting and receiving channels. All operate on low battery drain and feature complete high-precision low-drift crystal control of each transmitting and receiving channel.



Null Detector and VTVM

THE FREED TRANSFORMER CO., INC., 1718–36 Weirfield St., Brooklyn 27, N. Y. The No. 1210 null detector and vtvm has been designed for a-c

Edin instruments



OSCILLOGRAPH GALVANOMETER

Nos. 8001, 8002, 8003 and 8004 ink-writing galvanometers have sensitivities from 3.5 to 40 volts per cm., resonant frequencies from 15 to 130 cps., resistances from 1000 to 2000 ohms, frequency response up to 350 cps., and a single-jewel pivot construction. Units are designed for multiple operation up to 10 channels in a total width of 12 inches.



DIRECT-COUPLED AMPLIFIER

No. 8100 direct coupled amplifier has a voltage amplification of 13,000 with a maximum output of 70 volts. Frequency response from d.c. to 10,000 cps. is flat within 10%. Input impedance is 2 megohms; output impedance is 150 ohms. Input may range from 0.1 mv. to 100 volts. Stability is better than 0.1 mv. per thirty minutes, or 0.5 mv. per day. Attenuator is stepped for factors from 1 to 1000.



OSCILLOGRAPHS

Recorders can be supplied with 1, 3 or 9 chart speeds ranging from 0.1 mm./sec. to 250 mm./sec. See specifications of OSCILLOGRAPH GALVANOMETER for frequency range.

OSCILLOGRAPH AMPLIFIER

No. 8121 special amplifier has a time constant of 1 second, an exponential response to a square wave at high gain, input impedance of 1 megohm, and input form 0.1 mv. to 1000 volts. At low gain, No. 8121 becomes a DC amplifier with a voltage gain of 100 and an input of 10 mv./mm.

HIGH-GAIN AMPLIFIER

No. 8130 amplifier has a voltage gain of 1,000,000 and includes a built-in pre-amplifier. Frequency response is from 1 to 200 cps. Input may range from 10 microvolts to 100 millivolts. This amplifier is particularly suited for Biological studies.

Many other types of recording and amplifier circuits are available and special equipment can be assembled to meet particular specifications.

EDIN COMPANY, INC.
207 Main Street
Worcester 8, Mass.

Please send complete information on:

☐ RECORDERS
☐ NO. 8121 AMPLIFIER
☐ GALVANOMETERS
☐ No. 8100 AMPLIFIER
☐ No. 8130 AMPLIFIER
☐ _____ SPECIAL (Enclose details)

_____ (NAME)

_____ (NO.) _____ (STREET)

_____ (CITY) _____ (STATE)

_____ COMPANY _____ POSITION

SHORTAGES?

GET AN

ALMO-PINION*

AEROVOX
ALPHA
AMPERITE
ASTATIC
ATLAS
B & W
BELDEN
BELL SOUND
BELMONT
BIRNBACH
BLILEY
BOGEN
BURGESS
BUD
BUSSMANN
CANNON
CENTRALAB
CINAUDAGRAPH
CLAROSTAT
CORNELL DUBILIER
CROSLEY
DELCO
DRAKE MFG.
DU MONT LABS.
ELECTRO-VOICE
GENERAL CEMENT
GENERAL ELECTRIC
GREENLEE
HAMMARLUND
HALLICRAFTER
HALLDORSON
HICKOK
I. R. C.
INSULINE
JACKSON
JENSEN
JOHNSON
JONES
J. F. D.
KAINOR
KESTER
LITTELFUSE
MASCO
MC MURDO SILVER
MEISSNER
MILLEN
MINNESOTA MINING
J. W. MILLER
MUELLER
NATIONAL
NATIONAL UNION
OHMITE
PRECISION
PRESTO
QUAM NICHOLS
RADIART
RAULAND
RAYTHEON
REGAL
RIDER
R. M. E.
SAMS
SHURE
SIMPSON
SNYDER
SOLAR
SPRAGUE
STANCOR
STROMBERG CARLSON
SUPREME
SYLVANIA
TACO
TALK-A-PHONE
TAYLOR
THORARDSON
TRIPLETT
TURNER
U. T. C.
UNIVERSITY
UTAH
VACO
VALPEY
VISION
WALDOM
WARD
WARD-LEONARD
WEBSTER
WELLER
WESTON
WORK SHOP
XCELITE

*(They're Free!)

1 If you would like an impartial opinion of all the top makes, get a FREE Almo-pinion. Almo provides a one source call for most electronic needs.

2 You get the same factory prices, plus lots of added responsible service FREE.

3 You save time. Just a single call, wire, or letter will help you find a possible solution to your shortage or electronic problem.

4 If you need electronic parts or equipment, ask for a FREE almo-pinion. Please address your inquiry to Mr. Edward Smith, Industrial Electronics Department.

ALMO RADIO COMPANY
509 ARCH STREET, PHILADELPHIA 6, PA.
4 STORES TO SERVE YOU
Wilmington, Del. 6th & Orange Sts. | Atlantic City, N. J. 4401 Ventnor Ave. | West Philo. 6205 Market St.

Write for your FREE copy of the "Broadcaster" monthly news magazine of news and new products in electronics.

UNIVERSAL SCINTILLATION COUNTER

for ALPHA-BETA-GAMMA

Reliable—Accurate—Portable

Model 200A

A really "portable" precision instrument. Absence of "zero drift" especially notable, compared to usual ion chamber type instrument. Develops absolute discrimination against Beta and Gamma (when measuring Alpha radiation levels) by use of a very thin phosphor having a low counting efficiency for Beta or Gamma (approx. .0002%) but extremely high for Alpha particles. Switches easily from phosphor to crystal for counting Beta and Gamma radiations. Design and size facilitate Bench Contamination surveys.

Specifications:

1. **Power:** Batteries (self contained). Penlite or PM cells.
2. **Power input:** 6 volts 50 ma.
3. **Detection element:** 1P21 photomultiplier and phosphor, or crystal.
4. **Window:** Aluminum foil 1.75 mg/cm2
5. **Indication:** Meter plus aural.
6. **Calibration:** Disintegrations per min. for Alpha radiation. Milliroentgen or roentgen units per hour for Beta and Gamma radiation.
7. **Sensitivity:** 150 D/M — 500,000 D/M in ranges desired.
8. **Weight:** Approx. 2½ lbs! (one hand operation)
9. **Price:** $215.00.

We can supply laboratory instruments and field survey units.

Model 240A—Alphatron Geiger Detector
Model 241 —Geiger-Meuller Detector
Model 242 —Alphatron Geiger Meuller Detector

Descriptive literature available on request

ALPHA NUCLEAR LABORATORIES
Box 649 Asbury Park, N. J.

A few "open" territories left. Write for full particulars.

DANO

Gives You Top Coil Performance

- Form Wound
- Paper Section
- Acetate Bobbin
- Molded Coils
- Bakelite Bobbin
- Cotton Interweave
- Coils for High Temperature Applications

Deal with Dano, makers of every type of coil. From simple electrical coil windings to specially treated coils, Dano is fully set up to serve you. AND REMEMBER THIS: Dano makes every coil to your exact specifications.

Also, Transformers Made To Order

THE DANO ELECTRIC CO.
MAIN ST., WINSTED, CONN.

Little thought-of facts about capacitors

The short time breakdown voltage of a well-made D.C. capacitor is not less than 5 to 6 times the actual working voltage at 20°—

$E = 5 \times e$ min
E = Breakdown voltage
e = Rated d.c. working voltage

INDUSTRIAL CAPACITORS are unvaryingly held to this formula.

Designed for maximum safety and the smallest possible volume, INDUSTRIAL CAPACITORS are the most widely used capacitor in industrial applications.

WRITE TODAY FOR DETAILED CATALOG

INDUSTRIAL CONDENSER CORP.

Watch this space for other capacitor facts that will help you.

Sales Offices in All Principal Cities
3243 N. California Ave.
Chicago 18, Illinois

bridge measurements. It provides simultaneous measurement of the voltage across the unknown and the balance of the bridge. The vtvm has a sensitivity of 0.1, 1, 10 and 100 volts. Input impedance is 50 megohms shunted by 20 $\mu\mu$f. Frequency range is from 20 cycles to 20,000 cycles. Null detector gain is 94 db.

Multiplier Photometer

PHOTOVOLT CORP., 95 Madison Ave., New York 16, N. Y. Series 520 line-operated supersensitive electronic multiplier photometer is designed for the exact measurement of extremely low light values down to 1/10,000 microlumen. The model 520-A illustrated is intended primarily for density measurements. It has an indicating meter of logarithmic response. The top scale of the meter is calibrated in optical density and has approximately uniform divisions of 0.02 density. The bottom scale is a photometric scale that reads light intensities in arbitrary units from 0 to 100. Bulletin 360 gives a complete description and price list for the line.



R-F Shift Converter

NORTHERN RADIO CO., INC., 143 W. 22nd St., New York 11, N. Y. Type 107 model 2 radio-frequency shift

Donnelly jealously guards its reputation as a fabricator of sheet metal for the *"blue chip"* manufacturers of radar, communications and television.

We produce parts and enclosures for such vital programs as the *atomic bomb*, *radar* and *sonar projects*, *bomb-sight* and *fire-control* systems of airborne and surface craft, as well as *jet engines*.

Our major effort, however, is the manufacturing of *commercial products*, into which we carry these same fine Government precision standards.

We'd like the opportunity to discuss *your* sheet metal requirements.

Why take a chance? Take Donnelly!

Donnelly MANUFACTURING

A DIVISION OF JOHN DONNELLY & SONS
3134 WASHINGTON ST., BOSTON, MASS.

ARMED FORCES U.S. CERTIFIED

PRECISION SHEET METAL & PRESSED WOOD FABRICATION

Another PRECISION PRODUCT

JUST PLAIN RUGGED
. . . yet an instrument of highest QUALITY
. . . PRECISION
. . . ACCURACY

FOLLOW THE PARADE TO THE New Burlington Hermetically Sealed INSTRUMENT

The Burlington "Hermeticallly Sealed" *Instrument* was designed and is manufactured to conform to JAN specifications for sealed *instruments*.

- Steel case with heavy copper-cadmium plate and black finish.
- Excellent shielding due to case material and construction.
- Double strength clear glass.
- Black satin anodized aluminum bezel.
- Glass to metal seal under controlled humidity and temperature conditions.
- D'Arsonval permanent magnet type movement for DC applications.
- Designed to enhance panel appearance.
- Available in 1½" square, 2½" and 3½" round case types.
- Guaranteed for one year against workmanship and materials.



Best Buy Burlington

BURLINGTON INSTRUMENT COMPANY
DEPT. F-11, BURLINGTON, IOWA

ALLIED world's largest distributor of RCA ELECTRON TUBES FOR INDUSTRY

All types in stock
- Vacuum Power Tubes
- Thyratrons
- Vacuum & Gas Rect.
- Ignitrons
- Cold-Cathode Tubes
- Phototubes
- Oscillograph Tubes
- Camera Tubes
- Monoscopes
- Special Tubes

Quick, Expert Industrial Service

ALLIED maintains *in stock for quick shipment* the world's largest inventory of RCA special-purpose electron tubes—*of all types*. We specialize in supplying the tube needs of industrial, broadcast, governmental and other users. Shipments are made *from stock* to any part of the nation within hours after we receive your order. Save time, effort and money—fill *all* your tube needs from a *single, dependable source*.

FREE
Interchangeability Directory
Valuable guide to selection of proper RCA tube type replacements. Lists 1600 type designations, covering non-receiving electron tubes. Write for your FREE copy of RCA Guide No. 37-046.

REFER TO YOUR ALLIED CATALOG

Make ALLIED your central supply source for *all* electronic supplies—parts, tubes, test instruments, tools, audio amplifiers, accessories—available *immediately* from the world's largest stocks. Order from your ALLIED Catalog—the leading Electronic Buying Guide.

ALLIED RADIO
833 W. Jackson • Dept. 11-A-1 • Chicago 7, Ill

Everything in Electronics from ONE Source

Send for FREE 1951 CATALOG

PHALO OFFERS ASSURED QUALITY

All PHALO plastic insulated wire and cables, cord sets and other assemblies assure quality performance. The latest testing methods guarantee this fact.

Look For The PHALO trademark
Ask For The New PHALO catalog

PHALO Plastics Corporation

Corner of Commercial Street
Worcester, Mass.

converter is a dual-channel unit which converts mark and space tones into d-c pulses and drives teleprinters, tape and other recorders directly. Its integral 2-in. oscilloscope provides an outstanding tuning pattern for precise receiver adjustment during initial setup and while keying. It is capable of keying speeds up to 600 wpm. The unit also features 100 to 1,000-cps frequency shift. Mark frequency is set at 2,975 cps.



Frequency Standard

AMERICAN TIME PRODUCTS INC., New York City, N. Y. Type 2005 frequency standard is a compact source of accurate frequency at a commonly needed power level. It is useful in running small motors, timers and clocks; also in making frequency measurements, providing timing marks in oscillographs and high-speed cameras. Output frequency is 60 cycles, accurate to 1 part in 100,000 in a temperature range from 0 to 60 C. Output power is 10 watts at 115 volts approximate sine wave. Input is 115 volts, 50 to 400 cycles at 45 watts.



Distortion and Noise Meter

DAVEN CO., 191 Central Ave., Newark 4, N. J. Type 35-A distortion and noise meter provides a rapid accurate means of measur-

If you use any of these . . .

LIBERTY MIRROR can help you

- Aluminum First Surface Mirrors
- Chromium First Surface Mirrors
- Gold First Surface Mirrors
- Silver Second Surface Mirrors
- Gold Second Surface Mirrors
- Aluminum Second Surface Mirrors
- Copper Second Surface Mirrors
- Metallic Second Surface Mirrors
- Neutral Filters
- Transparent Mirrors
- Beam Splitters (low or no light absorption loss)
- Beam Splitting Dichroic Mirrors
- Beam Splitting Dichroic Filters
- Metallic Electrical Conducting Coatings
- Transparent Electrical Conducting Coatings
- Beam Splitters or Dichroic Mirrors with Transparent Electrical Conducting Coatings
- Low Reflection Coatings

Whether you use these singly or in large quantities, Liberty's research and production facilities are at your service. We operate the largest thermal vacuum evaporation department in the world, staffed with men trained through long experience in mass production by the vacuum process.

If you have new uses or experimental applications of vacuum deposited coatings, you can expect the same careful attention to an order for "one of a kind" that you would ask for thousands of units. Our research technicians stand ready to help you find the right solution to your special problems. Your inquiries are invited—use the handy coupon, below.

SEND FOR INFORMATION

LIBERTY MIRROR DIVISION,
LIBBEY • OWENS • FORD GLASS CO.,
L211 NICHOLAS BUILDING,
TOLEDO 3, OHIO

I am interested in your Liberty Vacuum Deposited Coatings Products. Please send additional information on

_____
(Type of Vacuum Deposited Coating Product)

☐ Please have salesman call.

Name _____ Title _____

Company _____

Address _____

City _____ Zone _____ State _____

LIBERTY VACUUM DEPOSITED COATINGS

Liberty Mirror Division

LIBBEY • OWENS • FORD GLASS CO.
NICHOLAS BUILDING, TOLEDO 3, OHIO

PRECISION POTENTIOMETERS

Various types of potentiometers custom wound to specifications are available. They feature extremely close limits in electrical characteristics and mechanical construction, low electrical noise, low torque, and long life.

All types will operate within specified limits of performance at temperatures —55° C. to +55° C., 95% relative humidity at altitudes up to 50,000 feet. Corrosion resistant materials are used throughout and all insulating parts are fungicided. Our potentiometers meet AN-E-19 specifications.

We invite your inquiries and specifications.



A minor modification of the standard sinusoidal potentiometer type RL-11-C (as illustrated) permits operation up to 1800 RPM. After a test of 28 million cycles at 1800 RPM, one of these units showed negligible wear.

Write for Bulletin F-68.

THE GAMEWELL COMPANY

Newton Upper Falls 64, Massachusetts

ACTUAL TESTS

PROVE

- JK H17 Crystals Are Truly Hermetically Sealed!

There's no room for doubt! Every JK H17 Crystal described as hermetically sealed is actually immersed in 95° C water as an actual test!

This, and many other rigorous tests, guards the quality of JK stabilized crystals all down the line.

JK makes a crystal to fit every industrial, broadcast, communication and amateur need.

Send today for your copy of the JAMES KNIGHTS Crystal catalog.

JK Stabilized H17

Frequency range 200 kc to 100 mc. The pin spacing is such that two units can be mounted in a loctal socket. A small extremely light weight hermetically sealed unit. Moisture and dustproof. Designed especially for use where space is at a premium. The crystal is plated and wire mounted. Pin diameter of the H17 is .050".

The H17L and the H17W are also available in the same frequency range. The H17L has a pin diameter of .093", and the H17W has wire leads.

The James Knights Company

SANDWICH ILLINOIS

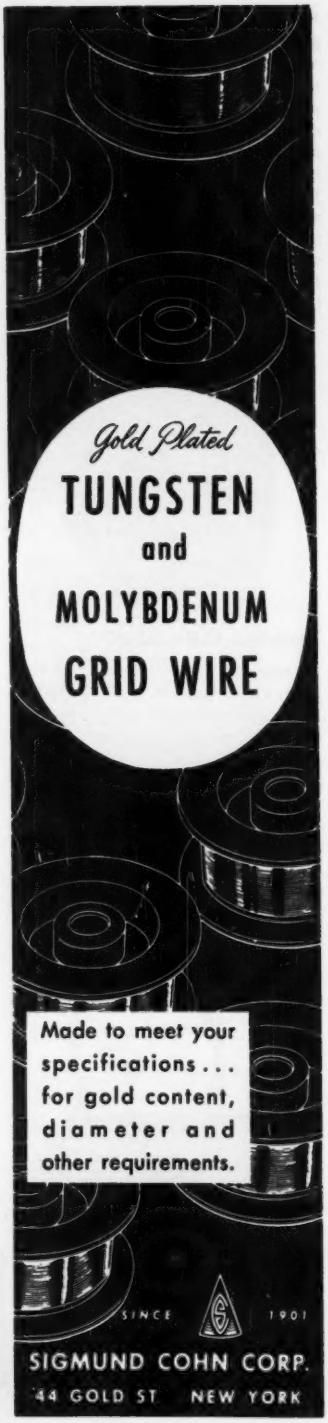

ing distortion, noise and hum level in audio-frequency equipment. No balancing or time-consuming tuning is required to make measurements. A pushbutton balances the unit automatically. The fundamental circuit of the meter comprises a series of eight fixed band rejection filters covering the 50-cycle to 15-kc range, followed by a stable, high-quality, wide-range (50 cycles to 45 kc), high-gain amplifier. Two amplifier gain controls are provided—one a step type covering the range +40 to -60 in 10-db steps; the other a continuously variable control covering the ± 10-db range.



Frequency Standard & Test Set

FREED TRANSFORMER CO., INC., 1718-36 Weirfield St., Brooklyn, N. Y., have introduced the model 1360 frequency standard and test set. It consists of a crystal-controlled oscillator, a modulator and a c-r oscilloscope for observation of Lissajous figures. Accuracy is better than 2 cycles or 0.1 percent, whichever is greater. Main advantages are the ease of adjustment procedure and the fact that any low-frequency oscillator can be used as an audio-frequency source for alignment of telemetering equipment. Catalogs and price lists are available.

Tape Recording Head

SHURE BROTHERS, INC., 225 W. Huron St., Chicago, Ill. Model TR5 tape recording head combines the functions of record, playback and erase in a single unit with excellent frequency response and output level. A special feature is the use of a deep-drawn mu-metal shield for optimum hum reduction. Record and playback coil impedance is

NEW, ADVANCED DEVELOPMENT in Radio Switch-Timers

Here's your chance to put something new and better into the design of alarm-clock radios—and at a *saving* in cost. "Tru-Bel"—Sessions' outstanding new ten-minute reminder—is a pleasant sounding bell specially tuned to penetrate right through the sound of radio music or speech. "Tru-Bel" gently coaxes the soundest sleeper to rise and shine if he should "cat-nap" for ten minutes after his radio turns on—it's a great improvement over harsh, rasping buzzers.

In other respects, too, Sessions Switch-Timer movements are distinctively different from conventional clocks. There's no center-disc, and clock hands are easily readable. What's more, the low speed motor is "kitten-quiet" without annoying buzz from high speed gears.

Other outstanding features include: "Sleep-Slector" lullaby switch on some models to turn radio off automatically at any preset time up to 90 minutes; automatic radio shut-off 1½ to 2 hours after timer turn-on (for the forgetful), 10 and 15 amp. switch (UL approved). In addition, you have your choice of front or back controls, round or square bezel, etched or screened numerals, luminous or in any color. Dial and hand styling to specifications. All movements factory tested and guaranteed for one year. Feel free to inquire for details, or send coupon below for catalog.

Sessions SWITCH TIMERS

The Sessions Clock Company, Timer Div., Dept. 4, Forestville, Conn.
Please send me, free of charge, your complete catalog of Radio Switch-Timers.

NAME..... DEPT.....
COMPANY.....
STREET.....
CITY..... STATE.....

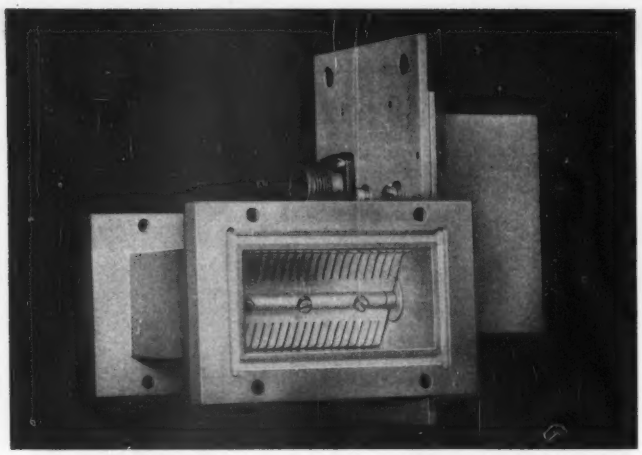

Microwave "Shutter" by TERPENING

The "shutter" you see in the waveguide section above is designed to close automatically when the radar is not operating. This prevents damage to the crystal detector, which might be caused by radiation from other nearby radars.

Specifications called for very high attenuation when closed, extremely low attenuation when open, and fully automatic operation.

As designed and produced in quantity in our plant, the performance of this component exceeded our customer's expectations. For example:

with the solenoid-actuated shutter in closed position, attenuation is greater than 40 db,

with shutter open, attenuation is negligible—a few hundredths of one db.

This is a typical example of the work we are set up to handle—from design through production—from single component to entire transmission line. Although our engineering staff, laboratories, and fully equipped shop are usually busy on government contracts, our unusual facilities may permit us to work with you on special components for military microwave systems. We shall be happy to talk with you about your present and/or future needs.

L. H. TERPENING COMPANY

DESIGN • RESEARCH • PRODUCTION

Microwave Transmission Lines and Associated Components

16 West 61st St. • New York 23, N. Y. • Circle 6-4760

1,650 ohms at 1,000 cps, while erase coil impedance is 1,000 ohms at 40 kc. Output level is 5 db above 1 mv at 1,000 cps at tape speed of 3.75 in. per second. Overall dimensions are 0.685 in. maximum height, 1.240 in. wide and 1.031 in. deep.



Amplifier Kit

TRIAD TRANSFORMER MFG. CO., 2254 Sepulveda Blvd., Los Angeles 64, Calif., has introduced the HF-10 amplifier, produced especially for those who like to build their own sound reproducing systems. It features a frequency response within 1 db from 20 to 20,000 cycles. Distortion is less than 2 percent from 50 to 18,000 cycles at full 10 watts output; less than 1 percent from 20 to 20,000 cycles at 5 watts. Gain is 74 db from crystal microphone or radio receivers, 96 db through preamplifier. Complete specifications, circuit diagram and prices are shown in bulletin HF-10.

Counting Rate Meter

RADIOACTIVE PRODUCTS, INC., Detroit 26, Mich., announces the model C-2, 3 counting rate meter for use with Geiger tubes. The instrument has application in monitor installations and also in the recording of x-ray diffraction patterns and other transient phenomena. Pulse inte-

"We have found Metex Electronic Gaskets excellent for HF currents inexpensive to assemble."
Sylvania Electric Products Inc.

Sylvania has been using Metex gaskets for over a year as conductive shields for their TR tubes used in radar and micro-wave ranging equipment.

To quote their experience: "We have found Metal Textile knitted wire gaskets excellent for conducting high frequency currents without boundary arcing. The gaskets are resilient, and yet do not deform too readily. Best of all, the material is inexpensive to assemble through soft soldering techniques."



A Sylvania Electric TR tube showing Metex gasket loose and in position

The properties—electrical and physical—which make Metex Electronic Gaskets effective in this, and other demanding HF and UHF applications are due to their being made from *knitted* (not woven) wire mesh. The hinge-like action of the knitted mesh permits controlled resiliency of the finished gaskets. These can be die-formed to close dimensional tolerances, when required. There is practically no limit to the metal or alloy which can be used.

If the equipment you are manufacturing or designing requires a resilient conductive or shielding material, our engineers will welcome the opportunity of working with you. A letter, addressed to Mr. R. L. Hartwell, Executive Vice President and outlining your requirements, will receive immediate attention.

METAL TEXTILE CORPORATION
641 EAST FIRST AVE., ROSELLE, N. J.

PRODUCTIMETER "SPECIALS"
for Radar and Electronic Applications



Companion shutter counters used as dual direction indicators. One counter adds while the other subtracts. Shutter blanks out counter which is on negative side of 000.

"Y" 2-figure Rotary Counter used in navigating instruments.



High-speed, non-reset "Y" type counter for building into radar instruments.

Special Model "Y" with window at rear designed for use in radar equipment.

These are a few of the "specials" developed by Durant for Radar and Electronic applications. When one of the many standard Productimeters is not the exact answer to a problem, Durant engineers modify, combine, or develop entirely new counters to meet the particular requirements of the job.

Write for Bulletin

DURANT MFG. COMPANY
1912 N. Buffum St. 113 Orange St.
Milwaukee 1, Wis. Providence 3, R.I.
Representatives in Principal Cities

PRODUCTIMETERS
SINCE 1879
Speedometers OF INDUSTRY

COSTS LESS because it's best

A CHIEF ENGINEER SAYS: . . . have been using the Fairchild Tape Recorder constantly . . . over 5000 hours now . . . practically no maintenance . . . get more work done in less time . . . optimum performance always . . . has operating features no other equipment has . . . my men work faster . . . without fatigue . . . has literally paid for itself . . . front office thinks I'm a magician!

FROM THE FRONT OFFICE: . . . tried to get along with cheaper tape recorders . . . looked good but didn't hold specs or stand up for long . . . Fairchild gives my customers better recordings . . . brings me more customers . . . can do shows now we couldn't with other recorders . . . brought in new sponsors . . . and my engineers' budget asks almost nothing for maintenance . . . how soon can we get delivery on another unit? . . . regret we didn't get the Fairchild Tape Recorder sooner!

WE HAVE FAIRCHILD TAPE RECORDERS: Columbia Records (N.Y.) • CBS-TV (N.Y. and Hollywood) • Reeves Sound Studios (N.Y.) • WJR (Detroit) • U. S. Signal Corps Photographic Center (L.I. City) • Italian Broadcasting System (Rome, Turin, Milan) • General Motors (Detroit).

Fairchild
RECORDING EQUIPMENT CORPORATION
154TH STREET AND 7TH AVENUE
WHITESTONE, N. Y.

Send Bulletin TR-2 About
FAIRCHILD PROFESSIONAL TAPE RECORDERS
My Name .....
Company .....
Address .....
.....
FR-129

MOSINEE

"More than Paper"

In the field of electronics and the electrical goods industry, MOSINEE is known for its *dependable uniformity*, and its scientifically controlled physical and chemical properties, such as:

Good dielectric strength . . . proper softness or stiffness . . . high tensile or tear strength . . . creped with controlled stretch or flexibility . . . specified pH for maximum-minimum acidity or alkalinity . . . accurate caliper, density, liquid repellency or absorbency.

If you have a fabricating or processing problem involving paper, a discussion with MOSINEE technicians might prove helpful. Please write Dept. E.

MOSINEE PAPER MILLS COMPANY, MOSINEE, WIS.

"Essential Paper Manufacturers"

grating circuit of the Geiger-tube power supply is adjustable to full-scale ranges from 100 to 50,000 counts per minute. Response time of the circuit is independently variable from 480 seconds to 0.1 sec. Better than 1-percent circuit linearity has been achieved and provisions for driving an external recording meter are provided.

Dynamic Pressure-Measuring System

SIERRA ELECTRONIC CORP., San Carlos, Calif. Phase and amplitude errors arising from flexible-tube connection of pressure cells used in dynamic measurement are eliminated in the new flush-mounted cells by elimination of the tubing connections themselves. Cells mount directly in the surfaces upon which the measured pressures impinge. Having a natural frequency of approximately 2,400 cps, the cells exhibit a uniform frequency respons' between 0 and 250 cps. Units ar. listed with these sensitivities: 0 to ± 2.5 psi, 0 to ± 5 psi and 0 to ± 10 psi. Phase accuracy throughout is better than ± 0.2 deg. The equipment is particularly applicable to the measurement of instantaneous aerodynamic forces.

Literature

Deflection Amplifier. Sylvania Electric Products, Inc., Emporium, Pa. Three loose-leaf perforated catalog sheets cover the type 6BL7GT duotriode deflection amplifier. Included are ratings, typical operating conditions, physical specifications, circuit applications and characteristics charts.

Switch Listings. Unimax Switch Division, The W. L. Maxson Corp., 460 W. 34th St., New York 1, N. Y. Makers and designers of equipment for the armed forces will find useful information about precision, snap-acting switches in the interchangeability guide recently issued. It is pictorially indexed with outline drawings of switches used in aircraft and other applications requiring precise control or

NATIONAL

- Proven
- Dependable
- Quality



MCN



SCN



ACN



ICN

POPULAR NATIONAL DIALS

ACN—the original design so popular with manufacturers, amateurs and experimenters who "build their own" and desire diirect calibration, 5" H. x 7¼" W. $3.30 net. ICN—an illuminated version of the ACN, 5⅛" H. x 7¼" W. $6.00 net. SCN—same dial scales as ACN in reduced size, 4 7/16" H. x 6¼" W. $3.00 net. MCN—scaled down dial, ideal for mobile installations and small converters, 2¾" H. x 3⅞" W. $2.70 net.

Export Div., Dept. E-151

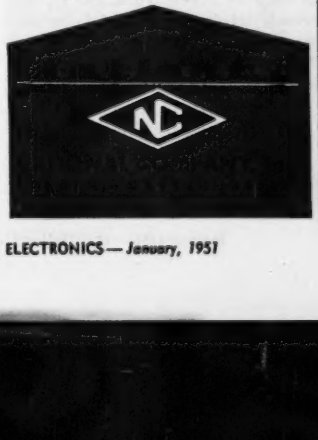

THE *Berkeley*

MODEL 902

DOUBLE PULSE GENERATOR





BRIEF SPECIFICATIONS

PULSE DURATION individually adjustable from 0.15 to 1.5 microseconds; **RISE TIME** is .05. **DECAY TIME** 0.10 microseconds. **SPACING** between pulses variable from —0.5 to +10 microseconds. **REPETITION RATE** adjustable in 3 ranges, 1 to 10, 10 to 100 and 100 to 1000 cycles; can be externally triggered. **OUTPUT IMPEDANCE** approximately 400 ohms, maximum output voltage,—200 v. **CONTROL CALIBRATION ACCURACY** ± 5% over entire range.

The Berkeley Double Pulse Generator produces two pulses individually controllable in width, amplitude and time relation to each other. Pulse amplitude is individually adjustable without cross effect from 0 to +50 v. and 0 to —200 v. A fine control, plus a 10 to 1 step attenuator permits varying the amplitude of both pulses after mixing.

TYPICAL APPLICATIONS...Resolution tests of high speed scaling circuits, response simulation of scintillation and proportional counters, evaluation of electronic gate and switch response, TV equipment testing, characteristic checks of wide band amplifiers, etc.

COMPLETE INFORMATION *is yours for the asking; please request Bulletin E-902.*

Berkeley Scientific Corporation

2200 WRIGHT AVE. • RICHMOND, CALIF.

Kenyon *Fits Your Production To A "T"*

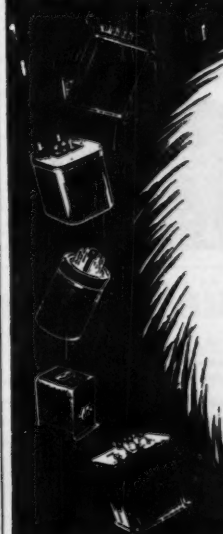

Kenyon "T's"—high quality, uniform transformers, are your best bet for development, production and experimental work. For over 20 years, the KENYON "K" has been a sign of skillful engineering, progressive design and sound construction.

Now—reduce inventory problems, improve deliveries, maintain your quality—specify KENYON "T's," the finest transformer line for all high quality equipment applications.

New Catalog Edition! Write Today!

Kenyon new modified edition tells the complete story about specific ratings on all transformers. Our standard line saves you time and expense.

Send for your copy of our latest catalog edition *now!*

KENYON TRANSFORMER CO., Inc.

840 BARRY STREET • NEW YORK 59, N. Y.

SPECTRUM ANALYSIS FROM AF TO UHF FASTER AND SIMPLER WITH THESE PANORAMIC INSTRUMENTS

These instruments help collect data more quickly, simply and objectively. Long recognized as being unexcelled for laboratory, research and production applications requiring spectrum or waveform analysis.

Spectral components are visualized graphically on a cathode-ray tube as sharp vertical deflections distributed horizontally in order of frequency. Deflection height directly indicates component or signal level.

Whether your problem is analyzing waveform distortions, noises, characteristics of AM, FM or pulsed signals, vibrations, spurious oscillations or modulation, response characteristics of filters or transmission lines, etc.; or monitoring many frequency channels simultaneously, it will pay you to investigate these panoramic analyzers.

PANORAMIC SONIC ANALYZER, MODEL AP-1
Automatic Waveform Analysis in Only 1 Second

Accepted as the PRACTICAL ANSWER for truly simple high speed analysis of vibrations, harmonics, noises, acoustics and intermodulation under static or dynamic conditions, the AP-1 automatically separates and measures frequency and magnitude of complex audio wave components.

Frequency Range	40-20,000 cps, log scale
Input Voltage Range	500uV-500V
Voltage Scale	Linear and two decade Log
Resolution	Optimum throughout frequency range

Presentations easily photographed or recorded. Can be calibrated for determining level of individual sound or vibrational components.

Panoramic Response Indicator for checking frequency transmission characteristics of lines, filters, speakers, etc., plus Intermodulation Analyzer-optional.

PANORAMIC ULTRASONIC ANALYZER, MODEL SB-7
A New Direct Reading Spectrum Analyzer



An invaluable instrument for channel monitoring, telemetering, medical studies, and for investigating ultrasonic waveform content and ultra audible noises and vibrations, the SB-7 allows overall observation of a 200KC wide band or highly detailed examination of selected narrow bands.

Frequency Range: 2KC-300KC, linear scale
Scanning Width: Continuously variable, 200KC to zero
Amplitude Scale: Linear and two decade Log.
Input Voltage Range: 1mV-50V
Resolution: Continuously variable from 2KC to better than 500 CPS.

PANADAPTOR SA-3, SA-6 PANALYZOR SB-3, SB-6
For General RF Spectrum Analysis

Recognized as the fastest and simplest means of investigating and solving such RF problems as frequency stability, modulation characteristics, oscillations, parasitics and monitoring under static or dynamic conditions, these models are available in over a dozen different types, designed to meet your particular application.

Panadaptor units operate with superheterodyne receivers which tune in the spectrum segment to be observed.

Panalyzors use an external signal generator for this purpose and have a flat response for determining relative levels of signals.

PANADAPTOR, SA-8 PANALYZOR SB-8
For RF Spectrum Analysis where Maximum Resolution is a "Must"

Available in several types with maximum scanning widths ranging from 200KC to 20MC, both the SA-8 and SB-8 feature. . . .



- Continuously Variable Resolution from 100KC to 100cps
- Synchronous and Non-synchronous Scanning
- Long Persistence Displays plus Intensity Grid Modulation for Analysis of Pulsed RF Signals
- Continuously Variable Scanning Width from maximum to Zero

Write Dept. P3 for complete specifications and prices

PANORAMIC RADIO PRODUCTS INC.

limit switching, lists AN numbers and gives the corresponding company type numbers.

Radio In Petroleum Industry. General Electric Co., Syracuse, N. Y., has available a new booklet covering broadly the use of two-way radio in the petroleum industry. It treats the general uses of two-way equipment, types of systems, licensing regulations, equipment capabilities, special installations, relaying, costs of installations and savings experienced by operators using two-way radio in their work.

Regulated Power Supply. Oregon Electronics, 206 S. W. Washington St., Portland 4, Oregon. Bulletin 53 covers the model D6 dual-output, heavy-duty, regulated power supply. The unit treated supplies d-c continuously variable from 0 to 600 v at 400 ma. Chief features and technical specifications are given.

Lever Key. Circuit Controls Co., 3201 Peoria St., Steger, Ill. A single-sheet bulletin describes the model 1 lever key intended to be used in medium-duty multiple-circuit switching. Illustrations, typical applications and general ordering information are included.

Rotary Switches. Electro Switch Corp., 167 King Ave., Weymouth 88, Mass. Rotary multiple tap and transfer switches that conform to Navy and Underwriters' Laboratories requirements are described in catalog 1950-JR. Sectional, cutaway and exploded views of typical switches show details of the design. Contact possibilities shown include single- and double-break as well as shorting and non-shorting action. Four-, eight- and sixteen-position switches are listed.

Audio Equipment. Sun Radio & Electronics Co., Inc., 122-124 Duane St., New York, N. Y., has ready for distribution the new edition of its 100-page audio equipment handbook. A large section is devoted to questions and answers most common to high-fidelity aspirants or owners. The balance of the handbook contains listings, prices and information on hundreds of components and subas-

Unless the Dry Battery You Need Is Listed in This Free Manual...

BURGESS ENGINEERS WILL DESIGN A NEW BATTERY TO MEET *YOUR* SPECIFICATIONS

It's all part of the Burgess Service! This complete Engineering Manual lists *hundreds* of battery types developed by Burgess Engineers to meet new requirements. If the specific battery you need is not among them, the complete Burgess facilities, design, production, and engineering will be placed at your disposal to build the battery you need in any quantity —large or small!

Write for ENGINEERING MANUAL and CHECK SHEET

No obligation. By return mail you will receive the FREE Engineering Manual listing the complete line of Burgess Batteries together with specifications; also the Burgess "Check Sheet" on which you may outline your requirements in the event that the battery you need has not already been developed. Address:

BURGESS BATTERY COMPANY
(DEPT. E1) FREEPORT, ILLINOIS

At Last!

PAPER TUBES for Coil Winding up to 7½" x 7½" wall thicknesses to ¼"

50,000 possible ARBOR sizes

IMMEDIATE DELIVERY on "STOCK" sizes of square and rectangular Dielectric Kraft tubes, from ⅜" x ⅜" to 1½" x 2⅜". Round tubes ⅜" ID to 1" ID.

Write today for prices on ANY dimension or quantity of tube you desire. Ask about our phenolic impregnated tubes.

ACCURATE PAPER TUBE CO.
852 N. Noble St. Chicago 22, Ill.



SMALL PARTS

Filaments, anodes, supports, springs, etc. for electronic tubes. Small wire and flat metal formed parts to your points for your assemblies. Double pointed pins. Wire straightened and cut diameter up to ⅛-inch. Any length up to 12 feet.

LUXON fishing tackle accessories.

Inquiries will receive prompt attention.

ART WIRE AND STAMPING CO.
227 High St. Newark 2, N. J.

Whatever test specifications your product has to meet, you can depend on Bowser, because *standard* Bowser Environmental Simulation Chambers meet all Governmental test specs. In most cases **one** Bowser Unit will perform all the tests required. To meet unusual testing requirements special accessories and instrumentation can be furnished.

All Bowser Units are self-contained, and will automatically maintain preset conditions within close tolerances. Their design and rugged construction assures continuous operation for indefinite periods, yet they require no special skills to operate. To meet specific requirements, Units can be provided with automatic cycling of temperature, altitude and humidity.

WALK-IN CHAMBERS . . . *Bowser also builds walk-in chambers of all sizes, field constructed or completely assembled in our plant.*

BOWSER Inc., Refrig. Div., Terryville, Conn.
Send me more information on the following:

High Temp. Tests	☐	Mildew Resistance Tests	☐
Low Temp. Tests	☐	Sand & Dust Tests	☐
Fungus & Humidity Tests	☐	Explosion Proof Tests	☐
High Altitude Tests	☐	Walk-in Chambers	☐

Name_____ Pos._____
Company_____
Street_____
City_____ Zone____ State_____
45

BOWSER INC.
Refrigeration Division
TERRYVILLE • CONN.

PRECISION
RECORDING WITH THE
Variplotter

The Model 205 Variplotter, highlighting accuracy, speed, and versatility, brings to industry and laboratory a new tool with a wide field of application. This instrument will present on a 30-inch square plotting surface a precise graphic representation of one variable as a function of another variable, requiring only that the variables be expressed by d-c voltages.

ACCURACY The static accuracy is .05 percent of full scale at 70°F. The dynamic accuracy averages .05 percent of full scale plus the static accuracy at a writing speed of 8½ inches per second.

SENSITIVITY The standard sensitivity of the Variplotter is fifty millivolts per inch with other ranges of sensitivity available.

RESPONSE The maximum pen and arm accelerations are 350 and 150 inches per second squared, respectively. Slewing speeds of both pen and arm are 10 inches per second.

The Variplotter may be adapted for special use by the addition of accessories selected from our standard line—such as multiple variable conversion kits, low-drift d-c amplifiers, analog computer components; or components designed for your specific need.

YOUR INQUIRIES ARE CORDIALLY INVITED.

ELECTRONIC ASSOCIATES, INC.
LONG BRANCH NEW JERSEY

semblies relative to high-fidelity music reproduction.

Radio Hook-Up Wire. Rome Cable Corp., 330 Ridge St., Rome, N. Y. Three data sheets describe the various standard types of radio hook-up wires now available. Those included are Underwriters' Laboratories approved thermoplastic types for 90 C and 80 C temperatures, rubber-insulated types for 75 C temperature and military approved types WL, SRIR, SRHV, SRI and SRIB. The insulation thicknesses and coverings as shown in the tables are required on approved types, or as noted.

Relay Catalog. Potter & Brumfield, 221 N. Main St., Princeton, Indiana. The 24-page catalog 109 contains new information on relays, shaded-pole motors and timers. Its comprehensive presentation facilitates ordering procedure, offers valuable assistance in development problems and in selecting the proper type relay to meet every requirement. Fully illustrated, the catalog contains pictures and schematic drawings of over 150 models, showing accurate over-all and mounting dimensions. Easy-to-read charts list complete coil and contact data on every relay.

Insulation Tape. Insulation Manufacturers Corp., 565 W. Washington Blvd., Chicago 6, Ill. Complete application and technical data on Silastic tape, Type R class H electrical insulation are given in bulletin 680. The type described, made by coating woven glass cloth with a partially vulcanized silicone rubber, is an extremely flexible insulation combining the heat stability qualities of the silicones, the resilience of rubber-like materials and the excellent physical and noninflammable properties of glass.

Portable F-M Radiotelephone. Doolittle Radio, Inc., 7421 S. Loomis Blvd., Chicago 36, Ill., has issued a 2-page bulletin on the Littlefone portable f-m radiotelephone that now provides increased power and range to facilitate 2-way communication in many fields of operation. The unit described

Where the Requirements are Extreme...

Use SILVER GRAPHALLOY*

For extraordinary electrical performance

GRAPHALLOY
TRADE MARK REG. U.S. PAT. OFF.

THE SUPREME BRUSH AND CONTACT MATERIAL

IN BRUSHES

- for high current density
- minimum wear
- low contact drop
- low electrical noise
- self-lubrication

IN CONTACTS

- for low resistance
- non-welding character

*Graphalloy is a special silver-impregnated graphite

Accumulated design experience counts — call on us!

GRAPHITE METALLIZING CORPORATION
1055 NEPPERHAN AVENUE, YONKERS 3, NEW YORK

Preferred where performance is paramount

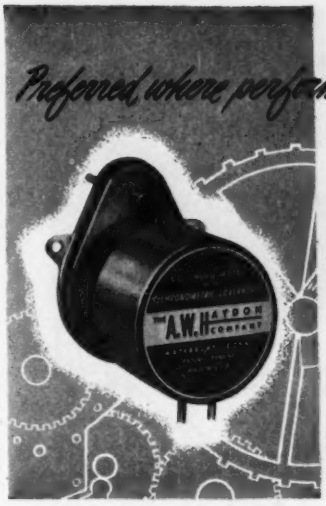

A. W. HAYDON
D. C. TIMING MOTORS
with Chronometric Governor

A primary power source of extreme accuracy, this revolutionary development of the A. W. Haydon Company is the first successful production combining the accuracy of a clock with the power of a motor. Made with jeweled movements, this extraordinary timer permits the solution of problems heretofore considered insurmountable.

Special Features:

- Extreme accuracy
- Wide range of voltage, load and temperature
- Reversible
- Compact
- Light weight

The A. W. HAYDON COMPANY
235 NORTH ELM STREET
WATERBURY 20, CONNECTICUT
Design and Manufacture of Electrical Timing Devices

Write Today for catalog sheet giving full information of A. W. Haydon D.C. Timing Motors with Chronometric Governors.

ASTRON

ELECTROLYTIC CAPACITORS

Consecrated to Quality Output and Golden Rule Service

Because of LONGER LIFE on the job . . . because of compactness, easy mountability and perfect compliance with today's set-engineering requirements . . . these dependable Electrolytic Capacitors are rapidly becoming a MUST with leading radio and television manufacturers. We believe they belong in YOUR plans for 1951. Get acquainted with them, and the rest of the extensive ASTRON line.

WRITE FOR CATALOG AC-2

ASTRON CORPORATION 255 Grant Ave. East Newark, N. J.
Manufacturers
HIGH QUALITY FIXED CAPACITORS

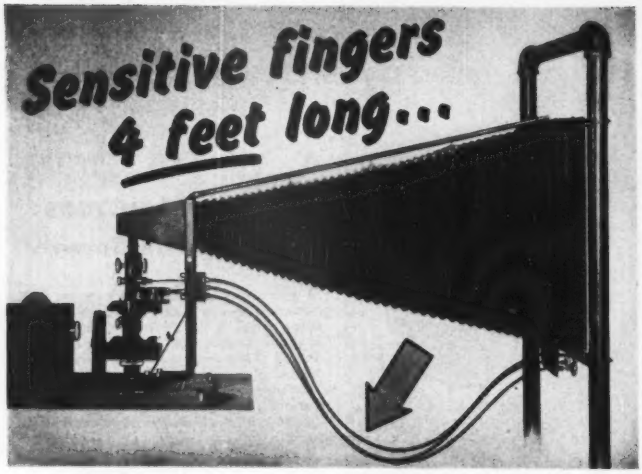

...point to an idea for TV set designers!

The sensitive fingers are S.S.White remote control flexible shafts. In the microprojector shown above they connect the microscope's focusing knobs to control knobs 4 feet away. In addition to providing the close sensitive adjustment the microscope requires, they allow the control knobs to be mounted in a *convenient operating position.*

This same idea offers possibilities in the design of TV receivers. By using S.S.White flexible shafts to couple the variable elements to their control knobs, you can mount the knobs where they can be manipulated from a *comfortable standing position.* In fact, use of the shafts will completely eliminate the awkward stooping, bending and squatting needed to tune the equipment when the knobs are mounted below the picture tube. Convenient tuning could be a potent selling feature that merits investigation.

For details,

WRITE FOR NEW BULLETIN 5008

S.S.White MAKES IT RIGHT

It contains the latest information and data on flexible shafts and their application. Write for a copy today.

THE S.S.White INDUSTRIAL DIVISION
DENTAL MFG. CO.
Dept. E 10 East 40th St.
NEW YORK 16, N. Y.

contains a 10-tube f-m transmitter and ultrasensitive 12-tube receiver that are both crystal-controlled. It is powered by self-contained lightweight storage batteries that may be recharged from 6-volt car battery or 115 volts a-c.

Acrylic Extrusion Molding Powder. Rohm & Haas Co., Washington Square, Philadelphia 5, Pa., has published a technical bulletin showing the recent modifications in Plexiglas VM acrylic molding powder that have made it as easily handled for extrusion as for injection molding. Physical properties of the powder described are unchanged but the improved formulation makes possible extrusions by standard techniques, with oven drying usually sufficient.

Tube Data. Sylvania Electric Products Inc., Emporium, Pa. Three recent technical data bulletins cover the type 5845 emission limited control diode, type 6CD6G beam power amplifier and type 6W6GT beam power amplifier respectively. Ratings, typical operating conditions, circuit applications, physical specifications and characteristics charts for each are given.

Spectrum Analyzer. Vectron, Inc., 235 High St., Waltham, Mass. A recent 2-page bulletin describes the spectrum analyzer, a superhet receiver with a 5-in. c-r oscilloscope output indicator. An illustration of the unit is included, and its chief uses and technical specifications are given.

Miniature Test Equipment. Oak Ridge Products, 239 E. 127 St., New York 35, N. Y., has literature available on its line of miniature test equipment. It includes mailing pieces, a reprint of an advertisement and a reprint of a technical article dealing with the model 103 signal generator; model 101 substitution tester and model 102 high-voltage meter. Chief features, technical data and prices are shown.

Transmitter Kit. E. F. Johnson Co., Waseca, Minn. Catalog 705 is a four-page treatment of the Viking I transmitter kit, a completely

record patterns from your OSCILLOSCOPE

with the new

Oscillo-Tracer

— as easy as writing your name!

— simpler than a photo record!

Here's a new, inexpensive accessory to multiply the usefulness of your 'scopes. Fits any standard 'scope—useful with every 'scope. Uses a newly developed, double-coated lens to superimpose the cathode-ray image on a sheet of paper or right in your lab notebook. Costs only $19.50 —and the first cost is the last cost.

Check this TRIAL OFFER!

Test the Oscillo-Tracer in your own laboratory **at our risk!** Just send us your purchase order and we'll ship you this useful, low-cost, 'scope accessory on approval. It must satisfy you—or you may return it and we'll cancel the invoice. Send us your trial order today!

We prepay shipping charge if remittance accompanies your order. Same return privilege applies.

Robert A. Waters, Inc.
4 Gordon Street, Waltham 54, Mass.

NAMEPLATE PROBLEMS?

Send for this Manual of . . .

MEYERCORD DECAL NAMEPLATES

HOW TO SOLVE NAMEPLATE PROBLEMS ON ANY SURFACE

Most useful nameplate manual ever offered! Shows hundreds of uses for durable, washable Decal nameplates—as trademarks, instructions, charts or diagrams—in all sizes, colors and designs. Application is fast, easy, economical. On metal, glass, wood, china, plastic, leather, rubber, crinkle—curved, flat or flexible surfaces, Meyercord Decals provide low cost permanent identification.

FREE!

WRITE FOR YOUR FREE COPY BUSINESS LETTERHEADS, PLEASE, DEPT. 41-1

The MEYERCORD Co.
World's Largest Decal Manufacturer
5323 W. LAKE ST. CHICAGO 44, ILL.

add REAL TENSION CONTROL to COIL WINDING OPERATIONS

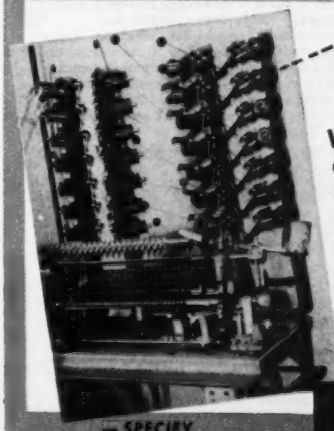

INSTALL

PAMARCO

Wire DeReeling Tensions on Your Present Machines!

Pamarco DeReeling Tensions increase the efficiency of coil winding departments in two important ways. Production quantity is increased because each machine accommodates more coils and can often operate at higher winding speeds. Production quality is improved because Pamarco free-running action practically eliminates wire breakage and shorted turns. No special skill or tools are required to operate Pamarco-equipped winding machines. Simple thumb screw can be set instantly for any wire gauge. For all the facts on money-saving Pamarco DeReelers, just call or write. Complete data will reach you promptly!

— SPECIFY **PAMARCO** FOR PERFECT COILS

Manufactured Exclusively by
PAPER MACHINERY & RESEARCH • INC
1014 OAK ST., ROSELLE, NEW JERSEY

WINDING DEVICES FOR TEXTILES AND ELECTRONICS

save work . . .
increase
precision . . .



measure
phase difference
DIRECTLY

with the new TIC Phase Meter

TIC's New 320-A Phase Meter is the first commercially available instrument for the direct measurement of the phase difference between two recurrent mechanical motions or two electrical signals independent of amplitude, frequency, and wave shape.

Phase measurements are made instantly and accurately—no balances, adjustments or corrections are involved. Phase angle readings at audio and ultrasonic frequencies are indicated directly on a large wide-scale meter with ranges of 360°, 180°, 90° and 36°. Useful frequency range 2 cps. to 100 k.c.

In audio facilities, ultrasonics, servomechanisms, geophysics, vibration, acoustics, aerial navigation, electric power transformation or signaling . . . in mechanical applications such as printing register, torque measurement, dynamic balancing, textile and packaging machinery and other uses where an accurate measure of the relative position of moving parts is required . . . the Phase Meter is a long needed measuring instrument never before available—a new tool for a heretofore neglected field of measurement.

Price: Relay Rack Mount $525.00. Cabinet for above $25.00

Add Type 500-A Wide Band Decade Amplifier



Designed for use with the phase meter at voltage levels below one volt and as a general purpose laboratory amplifier—features high gain negligible phase shift and wide band width. Unique circuitry—which employs three cathode followers—offers wider frequency range, higher input impedance and lower output impedance than other types. Panel switch selects proper feedback compensation when either optimum amplification or phase shift operation is desired. Outstanding specifications: *Amplification*—10; 100; 1000 selected by rotary switch . . . *Accuracy*—±2% nominal . . . *Frequency response*—±0.5db from 5 cycles to 2 mc on gain of 10; ±0.5db on 5 cycles to 1.5mc on gain of 100; ±0.8db from 5 cycles to 1mc on gain of 1000 . . . *Phase shift*—0 ± 2° from 20 cycles through 100 kc . . . *Gain stability*—constant with line voltages (105-125v).

Prices: Single Type 500-A in cabinet, $205.00 (Rack mount, $200.00)
Dual Type 500-AR in cabinet, $425.00

TECHNOLOGY INSTRUMENT CORP.
1058 Main Street, Waltham 54, Massachusetts

Engineering Representatives

Cleveland, Ohio—Pilgrim 1-6171 Manhasset, N. Y.—Manhasset 7-3454 Chicago, Ill.—UPtown 8-1141 Boonton, N. J.—Boonton 8-3007 Rochester, N. Y.—Genesee 3547-M Cambridge, Mass.—ELiot 4-1781 Canaan, Conn.—Canaan 649 Hollywood, Cal.—HOllywood 9-6305 Dayton, Ohio—Michigan 8721, Dallas, Texas—Dixon 9013

designed and engineered transmitter furnished unassembled but complete in every detail including wiring harness and ample assembly instructions. A circuit diagram of bandswitching the 10 to 160-meter transmitter is included.

Fast Pulse Amplifier. Hewlett-Packard Co., 395 Page Mill Road, Palo Alto, Calif. Volume 1, No. 11 of the Journal is a well illustrated description of the model 460B fast pulse amplifier, which is designed for a maximum output level of 125 volts open circuit—high enough to give more than full deflection on the type 5XP- c-r tube or a 2-in. deflection on a type 5CP- tube. Prices for the unit and its various accessories are shown.

F-M & TV Antenna. Tricraft Products Co., 1535 N. Ashland Ave., Chicago 22, Ill. Technical information on the new P-38 unidirectional f-m and tv antenna is found in a single-page bulletin. Among the features of the unit described are peak reception on all channels, seven separate and distinct radiating elements, and a 23-degree beam which rejects ghosts, interference and noise.

Cathode-Ray Tubes. Sylvania Electric Products Inc., Emporium, Pa., has published a 12-page booklet tabulating characteristics of 194 c-r tubes for tv receivers, oscilloscope and radar applications. The tubes described include 103 designed for magnetic deflection and 91 electrostatic types with screen sizes ranging from 2 to 22 inches. Data supplied includes: heater current and voltage; nominal dimensions, basing, persistence and fluorescence of screen; maximum design center ratings; and typical operating conditions.

TV Field Equipment. Radio Corp. of America, Camden 2, N. J. Form 2J-6881 is a six-page illustrated folder giving information on the company's latest field tv equipment, including an improved friction head, a new tripod, new field desk, and a rotatable mount and remote control for microwave parabola.

Radioactivity Measurement. Landsverk Electrometer Co., Pip-

Spincraft

SKILL WILL DO IT

offers an approach to the **Production of Electronic Parts** that is

fast, simple economical

CONICAL ENVELOPE . . . a stainless steel spinning for cathode ray assembly made of ⅛ in. thick type 446 chrome iron. 16 in. diameter. 11½ in. deep.



RECTANGULAR ENVELOPE . . . a special mass production product made for the television industry of ⅛ in. thick type 430 chrome iron. 24 in. wide. 16 in. high. 9 in. deep.

CORONA SHIELD . . . an aluminum spinning combining hemispherical and spherical forms. Made of 25O aluminum, ⅛ in. thick. Overall length 20 in.

● Immediate cost reduction is today's most urgent demand — requiring more alert thinking in the designing of parts and more ingenious tooling methods. Progressive new Spincraft techniques may help simplify your production problems, just as they have helped other large and small manufacturers.

Some examples of this advanced engineering are shown here. It will pay you to study them . . . and ask yourself if you can use this pioneer company's versatile ability to help solve your electronic problems. You'll find the Spincraft Data Book a good source for ideas. Write for your copy—without obligation.

Spincraft Inc.

SKILL WILL DO IT

4143 W. State St. Milwaukee 8, Wis.

Heretofore known as Milwaukee Metal Spinning Co.

. . . Now available

for the first time . . . in convenient reference form comprehensive technical, test and application data on

NEY PRECIOUS METAL ALLOYS

for sliding contacts, slip rings and non-corrosive, wear-resistant parts

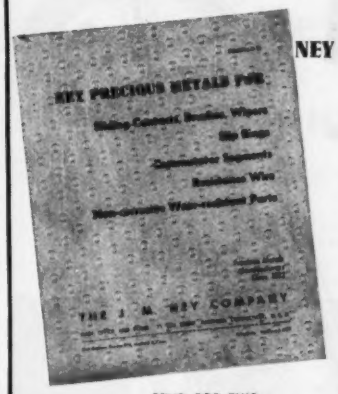

SEND FOR THIS USEFUL DATA BOOK

This catalog contains the boiled-down results of more than ten years' work in the solution of special contact and bearing problems in the electrical, electronic and scientific instrument fields. In addition to outlining the characteristics, applications and physical properties of Ney Precious Metal alloys, photographs and dimension drawings of a wide range of contacts, wipers and brushes now available as standard production items are also included. Engineers and designers are invited to write for copies of this useful data book, Bulletin R-12. We also offer the Ney Research Department's important reservoir of practical experience in this field for work on new or special applications.

THE J. M. NEY COMPANY

179 ELM STREET, HARTFORD, CONN.

SPECIALISTS IN PRECIOUS METAL METALLURGY SINCE 1812

18NY50

Only with **CO-AX**

air-spaced articulated **R.F. CABLES**

4mmf/ft

Patents Regd Trade Mark

THE LOWEST EVER CAPACITANCE OR ATTENUATION

We are specially organized to handle direct enquiries from overseas and can give

IMMEDIATE DELIVERIES FOR U.S.A.

Billed in Dollars Settlement by your check. Transaction as simple as any local buy.

LOW ATTEN TYPES	IMPED OHMS	ATTEN db/100ft at 100 mgs.	LOADING N at 100 mgs.	O.D."	
A1	74	1.7	0.11	0.36	
A2	74	1.3	0.24	0.44	
A34	73	0.6	1.5	0.88	HIGH POWER FLEXIBLE
LOW CAPAC TYPES	**CAPAC mmf/ft**	**IMPED OHMS**	**ATTEN db/100ft 100Mcs.**	**O.D."**	
C1	7.3	150	2.5	0.36	
PC1	10.2	132	3.1	0.36	PHOTOCELL CABLE
C11	6.3	173	3.2	0.36	
C2	6.3	171	2.15	0.44	
C22	5.5	184	2.8	0.44	
C3	5.4	197	1.9	0.64	
C33	4.8	220	2.4	0.64	V.L.C ★
C44	4.1	252	2.1	1.03	

★ Very Low Capacitance cable.

TRANSRADIO LTD

CONTRACTORS TO H.M. GOVERNMENT

138A CROMWELL ROAD LONDON SW7 ENGLAND

CABLES TRANSRAD LONDON

RCA TUBES ...

The complete line for industry...

RCA-8008 ★

Look to your RCA Tube Distributor for dependable electron tubes

A phone call to your local RCA Tube Distributor is a quick and sure way of getting prompt answers to your electron tube problems—and the best possible service for your tube requirements. See your RCA Tube Distributor when you need tubes for industrial and laboratory applications.

★ RCA Mercury-Vapor Rectifiers

You can get a wide variety of mercury-vapor rectifiers from RCA . . . including such well-known types as the 575-A, 673, 816, 857-B, 866-A, 869-B, 872-A, 5558, 5561, and 8008. RCA mercury-vapor rectifiers are noted for their freedom from arc-back and long, trouble-free service in industrial and commercial applications.

RCA RADIO CORPORATION of AMERICA
ELECTRON TUBES HARRISON, N.J.

pin Road, Cincinnati 31, Ohio. The model L-75 analysis unit, an instrument for radioactivity measurement, and its accessories are illustrated and described in bulletin A-2. Construction, operation, sensitivity and advantages, as well as other uses of the unit, are discussed.

Testing Facilities & Services. Inland Testing Laboratories, 2745 Janssen Ave., Chicago 14, Ill., announces a new 24-page, fully illustrated brochure covering the test facilities, equipment and their capabilities of an organization specializing in complete qualification testing of components and assemblies made under government contracts in accordance with military specifications.

Pressuregraph and Supplementary Instruments. Electro Products Laboratories, Inc., 4501 North Ravenswood Ave., Chicago 40, Ill. This bulletin gives features and specifications for the company's Pressuregraph, Syncro-Marker, and Dynamic Micrometer. Illustrations of the equipment are shown.

Vibration Test Equipment. The Calidyne Co., 751 Main St., Winchester, Mass. Bulletin No. 4401 describes the company's model 44 Shaker and its associated rotary power supply and console, models 45A and 45B. Included are installation details, a listing of outstanding features of the equipment, and guaranteed performance curves.

Television Equipment. Polarad Electronics Corp., 100 Metropolitan Ave., Brooklyn 11, N. Y., has issued a new catalog on television equipment for broadcast, manufacturer and laboratory use. It fully describes in 14 pages a line of television cameras, synchronizing generators, monitors, tv amplifiers and tv power supplies designed for broadcast operation.

TV Antenna Gain Chart. Technical Appliance Corp., Sherburne, N. Y. Engineering bulletin No. 64 contains actual measurements in db gain over half-wave dipoles for all popular antenna types. It is helpful to the serviceman in select-

Here's Why it Pays You to Read the Advertising

The advertising is a rich source of valuable information. In this magazine it offers you ideas and products that may well apply advantageously to your business.

Every issue is a catalog of goods, materials, and services — quickly available to you—just for the reading.

Leaders in business and industry turn to the advertising because they've discovered it helps them run their businesses more profitably.

When you read all the ads in this magazine, the chances are good that you'll get a lead that will materially help you do a better job. For example, you may find a specific piece of equipment that will be a profitable time-saver. Or a tool that will increase worker efficiency. That's why it pays to read the advertising. It's good business.

HEADQUARTERS FOR BUSINESS INFORMATION

McGRAW-HILL publications

Wayne Kerr

OF ENGLAND

a new range of

V. H. F. BRIDGES

Transformer Ratio-Arm principle covers 15 kc to 250 mc

Wayne-Kerr Laboratories have recently developed a range of H.F. and V.H.F. Transformer Ratio-Arm Bridges which are as stable in operation as the normal type of low frequency bridge. This has been achieved with a design which gives an extremely low impedance across the bridge terminals and between terminals and ground. Consequently, freedom from errors due to parasitic reactances permits a much greater accuracy of measurement.

Up to 100 Mc/s balanced or unbalanced measurements can be made with equal facility.

Demonstrations in New York by the U.S. Distributors :-

Marconi Instruments Limited, 23-25, Beaver Street, New York 4.

Telephone : HAnover 2-0197.

WAYNE-KERR LABORATORIES LTD., NEW MALDEN SURREY ENGLAND

Direct marking on COMPONENT PARTS is easy and inexpensive with these two MARKEM MACHINES

Both have been designed expressly for the electronic field. With them, you can imprint vital identification data and trade marks directly on cylindrical objects, thereby eliminating laborious and costly transfers. Either machine can be made part of your production line, cutting time and expense of marking components.

The MARKEM 13A – imprints the base of television and cathode ray tubes. It holds the tube completely immobile during the printing operation... uses sturdy rubber plates with quick-drying, heat-resistant inks.



The MARKEM 20A – marks radio tubes, miniatures, resistors, capacitors, and other cylindrical objects clearly, durably with Markem rubber plates and quick-drying, heat-resistant inks.

Type changes can be made on either machine in seconds. Both make attractive, legible imprints and will not damage the most fragile surfaces. Write today, describing the components you are marking, and we'll send facts and costs about the machine best suited to your needs.

MARKEM machine company | Keene 27, New Hampshire

ALDEN COMPONENTS FOR PLUG-IN UNIT CONSTRUCTION

Until recently there has been no one place where components specifically designed for plug-in unit construction were available. It was necessary for engineers to design and have parts custom made or improvise with standard components in makeshift arrangements. To provide the type of design necessary, Alden engineers are working with the industry developing a whole series of components specifically for plug-in construction.

The first problem undertaken by Alden engineers was a base specifically for plug-in unit construction. . . . the conventional tube type bases proved unsatisfactory; they didn't stand up, the boss broke and the pins bent. To overcome these difficulties Alden designed an entirely new base. . . . the Non-Interchangeable Series bases have no molded center boss to break, pins are strong and stubby—do not bend or break out and are Non-Interchangeable to prevent danger of mismating and costly burned out units.

Out of this work we feel that Alden's is the one place where you now can take your unitizing problems and obtain the standard bases, sockets, mountings and housings to answer most of your needs. As illustrated below, the Alden Non-Interchangeable and miniature bases have tremendous flexibility and are fast becoming the standard for plug-in construction.

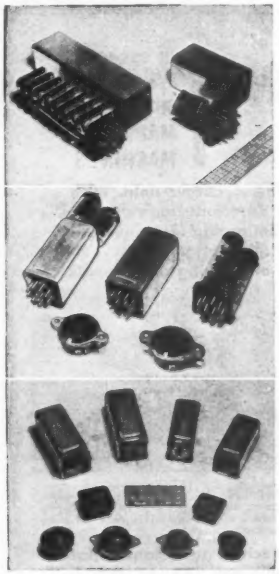

20 PIN NON-INTERCHANGEABLE BASES & SOCKETS

The scope of the Alden "20" base as a mounting medium is almost unlimited . . . cards, brackets and bails can be easily and securely attached with standard assembly tools. For holding components and miniature tube sockets the Alden Terminal Card Mounting System on the Alden Base gives ease of layout and wiring assembly. Open units for heat dissipation or shielded units for protection against dust or rough handling both lend themselves to mounting on the Alden Base with the same facility.

11 PIN NON-INTERCHANGEABLE BASES & SOCKETS

Smaller than the "20" but with the same features, the Alden "11" base and sockets are rugged for long life and Non Interchangeable to isolate critical voltages or signals and prevent burned out units. The retention force of pins and socket clips can be varied from light to heavy. Locating rings and alignment indicator quickly center base and socket for insertion. These and other features make it practical to incorporate plug-in construction in your design.

7 AND 9 PIN MINIATURE BASES & SOCKETS

Miniature and sub-miniature circuits, potted circuits, and miniaturized components easily become compact, sturdy plug-in units with the Alden 7 and 9 pin miniature plug-in bases and sockets. A wide selection of housings and mounting components are available for use with these bases.

Of particular importance is the Alden Terminal card Mounting System. Miniature circuits can be assembled on the card and the assembly can be mounted on the base to form a complete miniature unit.

Write for new booklet on "Components for Plug-in Unit Construction."

NA-ALD **ALDEN PRODUCTS COMPANY**

117 NORTH MAIN STREET, BROCKTON 64E, MASSACHUSETTS

ing the antenna type for specific areas in relation to channels operating and signal strength.

Quantitative Measuring Instrument. Allen B. Du Mont Laboratories Inc., 1000 Main Ave., Clifton, N. J. Form 10014-WP is an 8-page bulletin treating of the type 303 quantitative 10-mc c-r oscillograph, an instrument which incorporates circuits for the accurate calibration of time as well as amplitude. Specifications, chief features, and circuits (amplifiers, sweep and sync, and calibrator) are included.

F-M Communications Monitor. Hewlett-Packard Co., 395 Page Mill Road, Palo Aito, Calif. Volume 1, No. 12 of the Journal deals with the model 337 monitor for f-m communications services. The instrument described directly measures and continuously indicates both the carrier frequency and modulation deviation of an f-m transmitter operating in the range from 30 to 175 mc. Circuits and technical specifications are included.

Instrumentation Data. Minneapolis-Honeywell Regulator Co., Brown Instruments Division, Wayne and Windrim Aves., Philadelphia 44, Pa. Instrumentation data sheet No. 9.1–3 describes in a 4-page folder methods for accurate and rapid measurement of useful power with a check on reactive power to prevent overloading of generators. The system under discussion provides a continuous record of the power output of individual generators, the station and the system total.

Automatic Sample Counter. Special Instruments Laboratory, Inc., 1003 Highland Ave., Knoxville, Tenn. A single-sheet bulletin discusses the model 101 Auto Analyzer, designed to solve the problems encountered in accumulating large quantities of data from radioactive samples. The radioisotope analytical instrument described costs $2,725.

Magnetic Tape Recording. Amplifier Corp. of America, Twin-Trax Division, 398 Broadway, New York

Specify... GM

D'ARSONVAL PORTABLE

GALVANOMETERS

AND MOVEMENTS...

New!

Series 570-600
Pointer-Type
D-C Galvanometer

Here is a new addition to the line of G-M galvanometers. It is a completely assembled unit featuring an Alnico magnet for greater stability of calibration and a new high in sensitivity. Easily installed and replaced, requires only 2¾" below the mounting surface. Rugged construction throughout. Three models with sensitivities per mm. division of .08, 0.10 and 0.20 microamps.

Write for specifications and prices on these and other galvanometers

GM LABORATORIES, Inc.

4336 N. Knox Ave. • Chicago 41, Ill.

"*Just tell them they*

CAN'T AFFORD TO USE ANYTHING ELSE . . ."

That's Joe Gibbons speaking. We were talking about how to make people realize what a terrific thing this new

JELLIFF ALLOY 1000 RESISTANCE WIRE

really is, and that's the way he summed it up. And even when you make allowances for a salesman's natural enthusiasm, he's pretty near right. Just look at some of the important data:

THE C. O. JELLIFF MANUFACTURING CORPORATION SOUTHPORT, CONN.

Resistivity 1000 ohms/cmf
Tensile strength 165,000 psi—
TC of Resistance 20 ppm—
Coefficient of Expansion 13.9 ppm—
Corrosion Resistance equal to the best nickel-chromiums—
Winds fast and solders easily—
Lots more ohms in lots less space.

See what we mean? For the whole story, write for Bulletin 17.

SPECIALTY

LAB-BILT DRY BATTERIES

INDUSTRY

LABORATORY

RADIO AND IGNITION

Write for New FREE CATALOG

Here are complete descriptions of 78 Lab-Bilt Batteries of industrial and hard-to-get types. Specification Sheet enables you to order batteries especially designed to your own requirements. No order is too small. Specialty makes and ships FRESH Lab-Bilt Batteries without delay. Get this new catalog today.

SPECIALTY BATTERY COMPANY

Ray-O-Vac RAY-O-VAC Subsidiary

MADISON 10, WISCONSIN

TEC ACCEPTED

12 MC OSCILLOSCOPE
MODEL
T-601-A

- 17 TUBES INCLUDING 5" CRT.
- 10 MILLIVOLT SENSITIVITY
- 12 MEGACYCLE BANDWIDTH
- DEFLECTION PLATES AVAILABLE ON TERMINAL BOARD
- CONTINUOUSLY VARIABLE CALIBRATOR
- SWEEP MAGNIFICATION 5 TIMES SCREEN SIZE
- GOOD TRANSIENT RESPONSE
- TRIED AND PROVEN CIRCUITS
- CRT CALIBRATION GRID

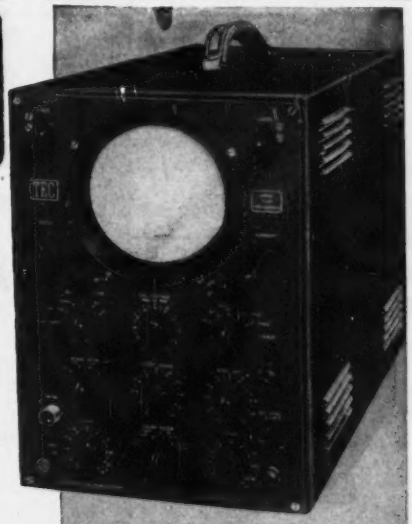

WRITE FOR SPECIFICATION DATA SHEET E-1

$349.50 LIST

COMPLETE WITH LOW CAPACITY PROBE

New! A top quality engineer's oscilloscope combining ALL the features of a laboratory instrument in one convenient size, light-weight, low cost unit. Compare feature for feature with models many times the price!

TEC TELEVISION EQUIPMENT CORP

238 WILLIAM ST. NEW YORK 7 N. Y.

IN CANADA: THE AHEARN & SOPER CO. LTD., OTTAWA

Leading Manufacturers* Specify
COMMUNICATION ACCESSORIES
TOROIDAL COMPONENTS

* Names on request...



UNCASED COILS

Toroids close-tolerance adjusted to your specifications. Coils are heat cycled to maintain accuracy even in toughest service conditions. Toroids have low T/C characteristics, extremely low magnetic pickup and external field. Coils may be supplied with balanced windings, also can be tapped, or have multiple winding for tight coupled impedance transformation.



PLASTIC COATED TOROIDS

Another C A C First. Our most progressive customers specify thermo-setting plastic coating for their coils, transformers, and tuned circuits. This tough resilient covering protects the coils and seals out moisture. Just another reason why the people who use toroids year after year specify C A C Toroidal Components.



CASED TOROIDS AND FILTERS

Rugged steel cases, construction meeting military specifications. Coils giving highest Q per unit volume and special capacitors provide sharper and more stable filters with a compactness never before possible. A special design for your every requirement.

Send for this FREE booklet today...

COMMUNICATION ACCESSORIES Company

HICKMAN

13, N. Y. A recent 128-page booklet and its 16-page supplement cover the elements of single and dual-track magnetic tape recording, as well as its applications. Among the 21 chapters are discussions of the recording process, playback process, erase process, unique magnetic tape phenomena and the inherent advantages of magnetic recording. Price of the profusely illustrated booklet is one dollar.

Controls and Resistors. Clarostat Mfg. Co., Inc., Dover, N. H. Catalog No. 50 offers a choice of resistors, controls and resistance devices. Cataloged resistors include cement-coated power resistors, flexible glass-insulated resistors, plug-in ballasts and voltage dividers, and automatic line-voltage regulators. Other items are tv beam benders, constant-impedance output attenuators, L-pads, T-pads and the handy power resistor decade box.

Hum Eliminator. Kalbfell Laboratories, Inc., 1076 Morena Blvd., San Diego 10, Calif. A recent mailing piece covers the model 503A bridged-T filter that is specially designed for use at the input terminals of a vtvm or c-r oscilloscope. The filter described attenuates hum at least 50 db. Special features, applications and prices are given.

Rosin Core Solder. Anchor Metal Co., 87 Walker St., New York 13, N. Y., has issued a bulletin on Shurflo rosin core solder, a new development in cored solders bringing together a superior rosin flux with virgin metals making a combination that is particularly adapted to all solder connections where corrosion is an important factor. Chief advantages and properties of solders are shown in the single-sheet bulletin.

Pocket Reference Book. Radio Corp. of America, Harrison, N. J., has completed the 1951 edition of its pocket reference book giving basic data on tubes, electronic components, test equipment, batteries and miniature lamps. A special feature in the new edition

Compare for *results!*
Compare for *price!*
and you'll choose the GREEN ENGRAVER



The Green Engraver offers great speed and convenience. Quickly cuts up to four lines of letters from 3/64" to 1" on curved or flat surfaces whether made of metal, plastics or wood . . . operates by merely tracing master copy—*anyone* can do an expert job. Special attachments and engineering service available for production work. Just the thing for radio, electronic apparatus and instrument manufacturers.

For quality engraving on

● Panels ● Name Plates ● Scales
● Dials ● Lenses ● Molds ● Instruments

. . . also does routing, profiling and three dimensional modeling.

GREEN
GREEN INSTRUMENT CO.
363 Putnam Ave.
Cambridge, Mass.

FOR PUBLIC ADDRESS, RADIO, and kindred fields,
JONES 400 SERIES
PLUGS & SOCKETS
of proven quality!

P-406-CCT

S-406-AB

Socket contacts phosphor bronze cadmium plated. Plug contacts hard brass cadmium plated. Insulation molded bakelite. Plugs and sockets polarized. 2, 4, 6, 8, 10, 12 contacts. Steel caps with baked black crackle enamel.

Catalog No. 17 gives full information on complete line of Jones Electrical Connecting Devices — Plugs, Sockets and Terminal Strips. Write

Jones HOWARD B. JONES DIVISION
CINCH MANUFACTURING CORPORATION

POLARAD
LABORATORY *Equipment*
for studio • laboratory • manufacture

20 MC
VIDEO AMPLIFIER
Model V

- Flat frequency response from 100 cps to 20 mc ± 1.5 db.
- Uniform time delay of .02 microseconds.
- Gain of 50 db.
- Frequency compensated high impedance attenuator calibrated in 10 db steps from 0-50.
- Fine attenuator covers a 10 db range.
- Phase Linear with frequency over entire band.

This unit is designed for use as an oscilloscope deflection amplifier for the measurement and viewing of pulses of extremely short duration and rise time, and contains the Video Amplifier Unit, Power Unit and a low Capacity Probe.

Specifications

Input Impedance: Probe—12 mmf + 470,000 ohms; Jack—30mmf + 470,000 ohms; Output Impedance 10mmf + 470,000 ohms each side push pull; Max. Input Volts 500 peak to peak with probe; Max. Output Volts (20 volts peak to peak (push pull)); Power: 115 volts 50/60 cps AC Line; Size 19¼"x22"x14¾".

Polarad
Electronics Corporation
100 Metropolitan Ave. Brooklyn 11, N. Y.

Your FREE copy of the latest
IN-RES-CO CATALOG
will be sent promptly on request

contains complete data including
ELECTRICAL AND MECHANICAL Specifications

of the complete line of

IN-RES-CO RESISTORS

Please write on company letterhead

IN-RES-CO RESISTORS
meet all instrumentation needs

TOLERANCE TO ± 0.1%
.01 OHM TO 1.0 MEGOHM
HIGH OR LOW WATTAGE
HERMETIC SEALED TYPES
ALL TYPES OF MOUNTING

INRESCO Resistors are a product of high-speed winding techniques that introduce a new measure of economy in precision wire wound resistors.

They are available for IMMEDIATE DELIVERY, in diversified types that meet practically every circuit requirement of load, ohmic value, size, and shape.

When planning a new circuit design, investigate the advantage of INRESCO resistors for economy, dependability and permanently fixed characteristics. For complete details, call or write today for catalog.

Manufacturers and designers of wire wound resistors—exclusively. Estimates on custom built resistors furnished without obligation; inquiries are invited.

IN-RES-CO INSTRUMENT RESISTORS COMPANY
1036 COMMERCE AVENUE, UNION, NEW JERSEY

WHY WORRY? Let Victoreen's three old stand-bys . . . . stand-by to protect you.

Proteximeter Model 300

AREA SAFE? Victoreen's area monitor; the Proteximeter for visual indication of accumulated scattered radiation up to 200 milliroentgens. No cords to stumble over; the Proteximeter's self contained batteries last long, cost little. Buy the finest and be sure; Victoreen's Proteximeter.

YOU SAFE? Personally yours, a Victoreen pocket chamber clipped beside your fountain pen goes everywhere you do. . . . and tells the story. With one Minometer, and a pocket chamber for each worker you know the daily dosage.



Minometer Model 287



Alpha Meter Model 356

ALPHA SAFE? Alpha particals do not penetrate very far, but they contaminate just the same. Erroneous results, especially in delicate tracer and isotope work, may result from alpha contamination. Be sure with a Victoreen Alpha Meter.

Victoreen

5806 HOUGH AVE. • CLEVELAND 3, OHIO

is an authoritative article on tv trouble-shooting. Additional television information includes charts on tv channels and carrier frequencies, tv signal data, tv receiver alignment, test-pattern analysis and air-path distance of reflected signals. The section on electron tubes has also been completely revised.

C-R Oscillograph. Allen B. Du Mont Laboratories, Inc., 1000 Main Ave., Clifton, N. J., has available a two-page advertising reprint giving technical information on its type 303 quantitative 10-mc c-r oscillograph. The leaflet illustrates the instrument itself and includes a frequency response chart, an oscillogram, complete description of the unit and an outline of its chief advantages.

Modulated Light Relay. Electronic Control Corp., 1573 E. Forest Ave., Detroit 7, Mich., has devoted a 4-page folder to the modulated light relay, a photoelectric relay which is not affected by other sources of light; is not affected by smoke, fog, dust, or line-voltage variations; will operate over long distance, through furnaces or ovens, and on invisible light. An illustrated description, specifications, mechanical dimensions and ordering information are given.

Aircraft Circuit Breakers. Heinemann Electric Co., Trenton 2, N. J. The 8-page, 2-color bulletin No. 3300 describes fully magnetic, nonthermal aircraft circuit breakers, which will operate in a range of from −65 to 185 F, vibration proof for 10 G. The Aero-Magnette breakers discussed have definite instantaneous trip point independent of time-delay characteristics and are not affected by ambient temperature. Also included are ratings, time overload curves for a-c and d-c, suggested uses and diagrams giving specifications of available mountings, covers and handles.

Selenium Rectifier. Clark Electronic Laboratories, Palm Springs, Calif. A recent 4-page folder covers a selenium rectifier with ratings available from 5 to 500 kw at any voltage from 6 to 600 or

Specify **BREEZE** "Monobloc" Waterproof and Pressure Sealed **CONNECTORS**

The only APPROVED Monobloc System for Advanced Radar, Communications, and Electronic Equipment

Breeze "Monoblocs", with single piece plastic inserts offer outstanding advantages in assembly, wiring, mounting and service in the field.

- *Removable contact pins*
- *Single hole panel mounting*
- *Pressure sealed to 75 psi, or higher when required*

Breeze "Monobloc" Waterproof and Pressure Sealed Connectors available in aluminum, brass, steel . . . all sizes and capacities . . . fully tested and approved.

WRITE FOR DETAILS . . .

If you have a tough connector problem ask BREEZE for the answer.

BREEZE Corporations, Inc. 41K South Sixth St. Newark 7, New Jersey

Our Survey at the Audio Fair Showed that.....

EVERYTHING REVOLVES AROUND REK-O-KUT TURNTABLES

At the recently held AUDIO FAIR in New York City...the following companies used REK-O-KUT Turntables to bring out the best reproduction in demonstrating their own components.

ALTEC LANSING	LEONARD RADIO	SAT. REVIEW OF LIT.
AUDAK COMPANY	MARK SIMPSON MFG. CO.	STEPHENS MFG. CORP.
BELL SOUND SYSTEMS	McINTOSH ENG. LABS.	SUN RADIO & ELECTRONICS
ELECTRONIC WORKSHOP	PANORAMIC RADIO PROD.	TETRAD CORP.
HARVEY RADIO CO.	PICKERING & COMPANY	TRIAD TRANS. MFG.
HUDSON RADIO & TV	RCA-VICTOR DIVISION	UNIVERSITY LOUDSPEAKERS
	REEVES SOUNDCRAFT	

This line-up of famous names in the Sound Reproduction Industry is, indeed, an outstanding tribute to the quality of REK-O-KUT Turntables. Since the turntable is the "heart" of the reproduction you, too, should insist on the best — insist on REK-O-KUT.

REK-O-KUT Turntables, Phonographs and Disc Recorders are Sold by Leading Music Stores, Radio Parts Distributors, and Audio-Visual Dealers. Write for Literature.

REK-O-KUT Co., Inc. 38-23 Queens Blvd. Long Island City 1, N. Y.

The **FISHER-PIERCE**

PHOTOELECTRIC TOWER LIGHTING CONTROL



Turn-on 35 ft.-candles—off at 55 ft.-candles—independent of time of day or weather conditions.

Low first cost—negligible maintenance.

3000 watts contact capacity.

Over 20,000 in use for tower and street lighting.

Complete details available — ask for Bulletin 63305.

THE FISHER-PIERCE COMPANY, Inc.

Completely Accessible

from operating surface

dependable instruments

Heiland DENVER

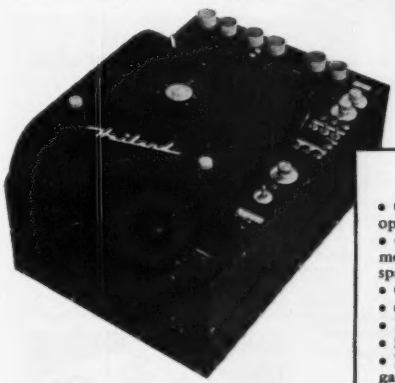

Type A-708...24-channel

AUTOMATIC OSCILLOGRAPH RECORDER

Affording complete accessibility from operating surface and requiring only a minimum of space for mounting, the HEILAND A-708 meets the exacting specifications of research and development personnel in aircraft flight testing, laboratory and industrial testing.

Write for complete details

FEATURES

- Completely accessible from operating surface
- Compact...can be mounted in a minimum of space...lightweight
- Can be panel mounted
- 6 to 24 channels
- Paper widths 5", 8", 12", 18"
- Simplicity of loading
- Direct monitoring of galvonometer light spots
- Flexibility of operation
- Simultaneous viewing, recording and scanning
- Trace identification...zero mirror...synchronizing reference trace
- Adjustable automatic record length

HEILAND RESEARCH CORPORATION • 130 East Fifth Ave. • Denver, Colo.

LOJACK

FEATURES:



- Sizes designed for normal requirements.
- Rigid construction — Round corners.
- Tight fitting inside covers for easy sealing.
- Cases or covers available separately.
- Mass Production means high quality at low competitive prices.
- Lojack covers and cases can be furnished with holes pierced, reinforcing brackets, channels or strips, tapped holes, studs, weld nuts, tapped inserts, etc., to better meet your specifications.
- Height of case variable.

Core	Length	Width	Height
EE96-27	1-1/4"	1-1/2"	2"
EI-21	1-1/2"	1-3/4"	2-5/16"
EI-625	1-3/4"	2-1/8"	2-9/16"
EI-75	2-1/8"	2-7/16"	2-15/16"
EI-11	2-7/16"	2-15/16"	3-3/8"
EI-3A	2-15/16"	3-1/8"	3-11/16"
EI-12	2-7/8"	3-3/16"	3-3/4"
EI-112	3-3/16"	3-1/2"	4-1/4"
EI-195	3-1/2"	3-7/8"	4-5/8"
EI-137	3-7/8"	4-1/4"	5-1/16"
EI-13	4-1/4"	4-3/4"	5-1/2"
EI-36	4-3/4"	5-1/4"	6-3/4"
EI-175	4-7/8"	5-1/2"	6-5/16"
EI-19	5-1/4"	6-1/4"	8-1/16"

BLANK CHASSIS

ALUMINUM OR STEEL UNFINISHED

	B	A	C	Mat Thickness
LJ-151	5	7	2	.037
LJ-251	7	9	2	.037
LJ-351	7	12	3	.050
LT-451	11	17	3	.064
LJ-551	13	17	3	.064

Cover Plates for All Sizes
All Sizes in Stock





TRANSFORMER MOUNTING BRACKETS

A — 2" to 3¾"
B — 3" to 4¾"

All Sizes In Stock

Let us quote on your short run precision sheet metal requirements.

Our model shop offers:—

- Finest workmanship
- Immediate service
- Production methods applied to your short run parts means moderate costs to you.



QUOTATIONS PROMPTLY SUBMITTED

LOJACK PRECISION CORPORATION

93 Worth Street WOrth 2-7237 **New York 13, N. Y.**

higher. The units described come complete in a steel cubicle containing rectifying plates, a dry-type transformer with class-B fireproof insulation, and control apparatus to fulfill the specifications desired.

Infrared Pyrometer. Hanson-Gorrill-Brian, Inc., One Continental Hill, Glen Cove, N. Y., has issued a single-sheet bulletin describing and illustrating its infrared pyrometer which measures temperatures of surfaces where physical contact methods and optical pyrometers are not usable. Accuracies of temperature measurements of the unit treated are within ±5 F. Chief advantages and prices are given.

Subminiature Tubes. Sylvania Electric Products, Inc., Emporium, Pa., has published data providing average characteristics of 30 commercially available subminiature electron tubes ranging from 0.200 in. to 0.383 in. diameter. Also provided in the characteristic chart are useful suggestions for mounting, shielding and application to obtain maximum life for tube types including those rated up to 5,000 hours. Two tables are also included for easy cross reference between experimental and RTMA type numbers and classification of types with respect to applications.

Logarithmic Attenuator. Kalbfell Laboratories, Inc., 1076 Morena Blvd., San Diego 10, Calif., has available a mailing piece dealing with the model 511B Logaten, a logarithmic attenuator with a dynamic range of 50 db. The unit described controls an ambient temperature range of 32 to 100 F. Technical data, chief uses and a price list are included.

Power and Control Cable. The Rome Cable Corp., Rome, N. Y., recently published a 60-page power and control cable catalog designed as a handy guide for easy selection and specification. It gives complete technical data, descriptions and recommended uses for the company's complete line. Considerable space is devoted to the subject of insulations and their applications and to approved shielding practices.

FOR THE "GOLDEN EAR" CROWD

THE STRAIN-SENSITIVE PHONOGRAPH PICKUP

Here's why this truly faithful reproducer appeals to people gifted with the "Golden Ear" . . . why the STRAIN-SENSITIVE PICKUP developed by the PFANSTIEHL CHEMICAL COMPANY brings out the brilliance of great voices and orchestras . . . the latent music on your records that other pickups leave untouched.

- The STRAIN-SENSITIVE PICKUP is an amplitude transducer with a CONSTANT RESISTANCE of about 250,000 ohms.
- Signal output is at a practically CONSTANT IMPEDANCE level.
- Excellent transient response.
- NO DISTORTION, phase shift or evidence of intermodulation is audible.
- LINEAR RESPONSE free from peaks or resonances.

Cartridges are available for both standard and micro-groove, and can be had with Famous PFANSTIEHL M47B Precious Metal Alloy or diamond tipped styli.

A special preamplifier is necessary to provide the correct D.C. voltage for the pickup element and to provide the first stages of signal gain. Four styles are ready, or, if you prefer, you can build your own from the circuit in the literature.

Ask your radio supply man, or write today for complete FREE INFORMATION.

PFANSTIEHL
CHEMICAL COMPANY
103 Lake View Avenue, Waukegan, Illinois



for HIGH MEGOHM RESISTORS

RPC Type H Resistors are furnished with resistance values as high as 50 million megohms (5 x 10^{13} ohms). Their advanced design insures highest stability with extremely low noise level, polarization effects, and voltage and temperature coefficients. Available in sizes suitable for any circuit requirement. Standard resistance tolerance ± 10%.

RPC Type H Resistors are rugged, durable units jacketed in polyethelene to provide maximum protection against mechanical damage and humidity. These resistors are eminently suited for electrometer circuits, radiation equipment, photo cell circuits and as high resistance standards. Moderately priced. Write for catalog today.

ALSO MANUFACTURERS OF HIGH QUALITY PRECISION WIRE WOUND RESISTORS, HIGH FREQUENCY RESISTORS AND HIGH MEGOHM RESISTORS. WRITE TODAY FOR CATALOG.

rpc RESISTANCE PRODUCTS CO.
714 RACE STREET • HARRISBURG 2, PA.

Lavite STEATITE CERAMIC

Design engineers and manufacturers in the radio, electrical and electronic fields are finding in LAVITE the precise qualities called for in their specifications . . . high compressive and dielectric strength, low moisture absorption and resistance to roe, fumes, acids, and high heat. The exceedingly low loss-factor of LAVITE plus its excellent workability makes it ideal for all high frequency applications.

Complete details on request

D. M. STEWARD MFG. COMPANY
Main Office & Works: Chattanooga [illegible]
Chatham, Mass. • Chicago • Los Angeles
New York • Philadelphia

New BIRTCHER TUBE CLAMP FOR MINIATURE TUBES

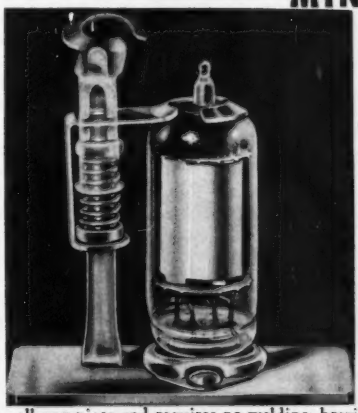

POSITIVE PROTECTION AGAINST LATERAL AND VERTICAL SHOCK!

The *New* Birtcher Type 2 Tube Clamp holds miniature tubes in their sockets under the most demanding conditions of vibration, impact and climate. Made of stainless steel and weighing less than ½ ounce, this *New* clamp for miniature tubes is easy to apply, sure in effect. The base is keyed to the chassis by a single machine screw or rivet...saving time in assembly and preventing rotation. There are no separate parts to drop or lose during assembly or during use. Birtcher Tube Clamp Type 2 is all one piece and requires no welding, brazing or soldering at any point.

If you use miniature tubes, protect them against lateral and vertical shock with the Birtcher Tube Clamp (Type 2). Write for sample and literature.

Builder of millions of stainless steel Locking Type Tube Clamps for hundreds of electronic manufacturers.

The **BIRTCHER** *Corporation*

Designed for
Application

FLEXIBLE COUPLINGS

The No. 39000 series of Millen, "Designed for Application" flexible coupling units include, in addition to improved versions of the conventional types, also such exclusive original designs as the No. 39001 insulated universal joint and the No. 39006 "slide-action" coupling (in both steatite and bakelite insulation).

The No. 39006 "slide action" coupling permits longitudinal shaft motion, eccentric shaft motion and out-of-line operation, as well as angular drive without backlash.

The No. 39005 is similar to the No. 39001, but is not insulated and is designed for applications where relatively high torque is required. The steatite insulated No. 39001 has a special anti-backlash ball and socket grip feature, which, however, limits its serviceable operation to torques of six inch-pounds, or less. All of the above illustrated units are for ¼" shaft and are standard production type units.

JAMES MILLEN MFG. CO., INC.

MAIN OFFICE AND FACTORY
MALDEN
MASSACHUSETTS

NEWS OF THE INDUSTRY

(continued from page 134)

as instructors, technical writers, and professional engineers in the field of communications and electronics.

Although veterans are accorded preference, there are a sufficient number of openings to provide for the appointment of nonveterans who can qualify. Salaries range from $3,825 to $6,400 a year. Applicants for electronic engineering positions should have at least one year of professional experience in addition to an appropriate bachelor's degree or a master's degree for the salary of $3,825 a year. Additional experience may be qualifying for higher salaries up to $6,400.

Persons with 4 years or more of practical experience in the construction, maintenance or repair of radio or radar are especially needed for instructor positions. Men with teaching experience in addition to their technical background in these fields may be employed at salaries ranging from $3,825 to $4,600 a year. Openings are in microwave radio relay, radar, radio electronics, fixed station radio, central office techniques, teletype installation and maintenance, repeater and carrier, and dial central office techniques.

Technical writers with 3½ to 5½ years of experience in preparing reports, manuscripts or manuals dealing with electronics, radio, radar or communications may qualify for positions at salaries of $3,825 to $5,400 a year.

Applicants should complete Standard Form 57, which is available at any first or second class post office, and submit it to the Civilian Personnel Branch, Building T-530, Ft. Monmouth, N.J. For applicants who can report in person, interviews will be held between 8:00 a.m. and 3.00 p.m., Tuesday through Friday.

IRE Elects Officers for 1951

ELECTION of Ivan S. Coggeshall, general traffic manager of Western Union Telegraph Company's overseas communications, as president of the Institute of Radio Engineers for 1951 was recently announced by the board of directors in New

ONLY SPECIFIC COILS CAN DO THIS JOB-

This Bobbin Type Coil is supplied to clock makers: Some use 37#, others may specify 38# or 40# wire; Deep wax or lacquer impregnation; enamel, formex, or nylon wire insulations. At Coto, it is *usual* to work to close tolerances.

COTO-COIL *Builds Them!*

When you need electrical coils, why not take advantage of 34 years of experience, engineering competence, and modern production facilities. Coto coils are built for you, to your specifications.

COTO-COIL
COMPANY
65 Pavilion Avenue
Providence 3, R. I.

COIL SPECIALISTS SINCE 1917

SYNTRON
SELENIUM RECTIFIERS



Made by a new process to a uniform, high quality for continuous, heavy-duty service.

½" sq. to 12" x 16" cells—in stacks, or single cells for customer assembly.

Write for literature

SYNTRON CO.

241 Lexington
Homer City, Pa.

SPLENDID ISOLATION

SIGNAL GENERATOR TF867

Because its superiority is unchallenged, Signal Generator type TF 867 stands alone, in splendid isolation. Especially noteworthy are an expanded wide-view scale covering 15 kc/s to 30 Mc/s and a concentric terminating unit which, while showing exact circuit conditions on an animated diagram, is also a dummy aerial and impedance source of 75Ω or 13Ω. Other facilities include crystal standardisation, freedom from unwanted frequency modulation, deep amplitude or carrier shift modulation and stabilised output control. Output is variable from 4V to 0.4μV and calibration indicates the true artificial signal e.m.f. irrespective of load.

Further information from any of the following addresses:

MARCONI INSTRUMENTS LIMITED

U.S.A. Sales and Service: 23-25 Beaver Street, NEW YORK, 4

CANADA: CANADIAN MARCONI LTD., Marconi Building, St. Sacrament Street, MONTREAL
ENGLAND: (Head Office and Works) ST. ALBANS, HERTFORDSHIRE

THE WORLD'S LEADING TWIN LEAD TELEVISION LIGHTNING ARRESTER



Approved

$2.25 List Price

completely waterproof

JFD SAFE TV GUARD

Protects television sets against lightning and static charges. Simple to install everywhere and anywhere . . . no stripping, cutting or spreading of wires. More than 500,000 in use today!

See your jobber or write to —

JFD MANUFACTURING CO., INC.
6137-A 16th Ave., Brooklyn 9, New York
First in Television Antennas and Accessories

400-800 CYCLE AC

From 5.5v to 230v DC Input



New **Carter*** *High Frequency*

INDUCTOR ALTERNATOR

- **LIGHT WEIGHT** Filter Model Shown Weight only 22 lbs.
- **SMALL SIZE** 10"x4½"x7¾" (Filter Model as shown)
- **PRECISION BUILT** Shaft and bore fits held to less than .0002"
- **ARMATURE** Triple and quadruple insulated windings statically and dynamically balanced
- **BALL BEARINGS** Require no maintenance or lubrication in normal service

*T.M. Reg. U.S. Pat. Off.

Newly developed in the Carter research and engineering departments, this new rotary power supply is ideal for aircraft, geophysical, government and laboratory research, and other applications demanding a small, mobile source of up to 100 watts high frequency AC. Primarily designed for 24-29v. DC airborne equipment, but available at any input voltage 5.5v to 230v. Inductor principle eliminates slip rings and brushes. Electrically isolated input and output units. Separate DC plate output also available in addition to the h.f. AC.

Carter Motor Co.
Chicago, Illinois

2646 N. Maplewood Ave., Chicago

WRITE for Bulletin #350. Contains complete illustrated information on the New Carter Inductor Alternator, mechanical and electrical specifications, performance chart, etc. Yours FREE for asking!

For AC CURRENT ANYWHERE....
NO MAGIC just use ATR INVERTERS

ATR
STANDARD AND HEAVY DUTY
INVERTERS

For Inverting D. C. to A. C.

Specially Designed for operating A. C. Radios, Television Sets, Amplifiers, Address Systems, and Radio Test Equipment from D. C. Voltages in Vehicles, Ships, Trains, Planes and in D. C. Districts.

✓NEW MODELS ✓NEW DESIGNS ✓NEW LITERATURE
"A" Battery Eliminator, DC-AC Inverters
Auto Radio Vibrators
ATR See your jobber or write factory

AMERICAN TELEVISION & RADIO CO.
Quality Products Since 1931
SAINT PAUL 1, MINNESOTA, U.S.A.

I. S. Coggeshall

York. The new president has been active in the adoption of electronic methods and devices in the telegraph and submarine cable field. He will succeed Raymond F. Guy, manager of radio and allocation engineering of the National Broadcasting Company.

Jorgen C. F. Rybner of Copenhagen, professor of telecommunications at the Royal Technical University of Denmark and noted author of Danish and English textbooks on network theory, was elected vice-president. He will succeed Sir Robert Watson-Watt of London, an authority on military radar.

Directors elected by the Institute for 1951 are: William H. Doherty, director of electronic and television research for Bell Laboratories, Murray Hill, N. J.; George R. Town, associate director of the engineering experiment station at Iowa State College, Ames, Iowa; Harry F. Dart, office manager of the electronics engineering department of Westinghouse Electric Corp., Bloomfield, N. J.; Paul L. Hoover, head of the department of electrical engineering, Case Institute of Technology, Cleveland, Ohio; William M. Rust, Jr., head of geophysics research for Humble Oil and Refining Co., Houston, Texas; and Allan B. Oxley, chief engineer of RCA Victor Co., Montreal, Quebec.

In addition, the following directors will continue to serve on the Board during 1951: S. L. Bailey, R. F. Guy, W. L. Everitt, D. G. Fink, W. R. Hewlett, J. W. McRae,

2 KW VACUUM TUBE BOMBARDER OR INDUCTION HEATING UNIT



For Only $650.

Never before a value like this new 2-KW bench model "Bombarder" or high frequency induction heater . . . for saving time and money in surface hardening, brazing, soldering, annealing and many other heat treating operations.

Simple . . . Easy to Operate . . . Economical Standardization of Unit Makes This New Low Price possible.

This compact induction heater saves space, yet performs with high efficiency. Operates from 220-volt line. Complete with foot switch and one heating coil made to customer's requirements. Send samples of work wanted. We will advise time cycle required for your particular job. Cost, complete, only $650. Immediate delivery from stock.

Scientific Electric Electronic Heaters are made in the following range of Power: 1-2-3½-5-7½-10-12½-15-18-25-40-60-80-100-250KW.

Scientific Electric
Division of
"S" CORRUGATED QUENCHED GAP CO.
107 Monroe St., Garfield, N. J.

High Sensitivity . . Logarithmic

AC VOLTMETER

50 MICROVOLTS TO 500 VOLTS

SELF-CONTAINED ALL AC OPERATED UNIT

An extremely sensitive amplifier type instrument that serves simultaneously as a voltmeter and high gain amplifier.

- Accuracy ±2% from 15 cycles to 30 kc.
- Input impedance 1 megohm plus 15 uuf. shunt capacity.
- Amplifier Gain 25000

Also MODEL 45 WIDE BAND VOLTMETER .0005 to 500 Volts! 3 Cycles 1600 kc.

MODEL 47 VOLTMETER

A few of the many uses:

- Output indicator for microphones of all types.
- Low level phonograph pickups.
- Acceleration and other vibration measuring pickups.
- Sound level measurements.
- Gain and frequency measurements for all types of audio equipment.
- Densitometric measurements in photography and film production.
- Light flux measurements in conjunction with photo cells.

Write for Complete Information

Instrument Electronics Corp. 45-17 Glenwood Street LITTLE NECK, L. I., N. Y.



For Toroidal Coils

To Your Specifications and at LOW COST*

write

UNIVERSAL MFG. CO., INC.
404 Hillside Avenue
Hillside, New Jersey

* This is possible due to our own specially designed winding equipment.

GOV'T. CONTRACTORS



SPARE PARTS BOXES

CONFORMING TO

Federal Specifications

Military Specifications

Air Force—Navy Aeronautical Specifications

Navy Department Specifications

WRITE FOR FURTHER INFORMATION

Mueble MANUFACTURING CO. OWATONNA, 55 MINN.

it's FALSTROM for metal forming-

FORMED AND ASSEMBLED BENCH BOARD

SEE OUR CATALOG IN SWEET'S



1. CONTROL CENTERS
2. ENCLOSURES
3. PANELS
4. BOXES

FALSTROM service is fast, competent, complete. It includes forming, punching, welding and finishing. Piping, wiring and accessories can be built in when desired. Falstrom engineers will even procure and install your instruments to your specifications. All work performed by Falstrom is done by engineers and technicians thoroughly familiar with each phase of production. Mechanics skilled in working with steel, aluminum and stainless steels assure finest workmanship. Falstrom installations are in service throughout the electrical, chemical and petroleum industries—have been an accepted standard of excellence since 1870. For a practical, economical solution to your metal forming problems, go to Falstrom!

TO GET ALL THE FACTS, FILL OUT AND MAIL THE HANDY COUPON BELOW

FALSTROM COMPANY

93 FALSTROM COURT • PASSAIC, N. J.

Gentlemen:

Please send full information at once. I am interested in Nos.

NAME

TITLE

COMPANY

STREET

CITY ZONE STATE

Try Remler for Service-Tested "Hard-to-Get" Components

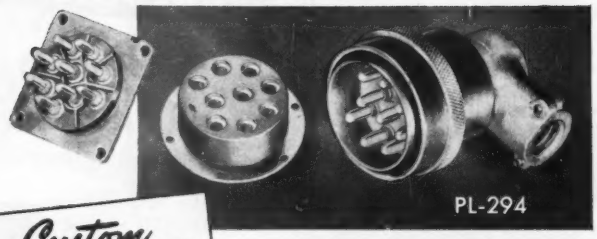

Custom Components

Metal-plastic components designed and manufactured to order. Write for quotations specifying electrical and mechanical characteristics. Describe application. No obligation.

PLUGS & CONNECTORS

BANANA PIN TYPES...JAN SPECIFICATIONS

Multi-contact connectors and mating chassis counterparts. Melamine or alkyd insulation; steel or brass nickel-plated shells. Banana springs are heat treated beryllium copper. Unexcelled low resistance contact. Highest quality . . . good for thousands of connects and disconnects.

Special Connectors to Order—Miniatures; water tight and pressure proof types to JAN specifications.

Remler Company Ltd. 2101 Bryant St. San Francisco 10, Calif.

Remler

Since 1918 **PIONEERS IN ELECTRONICS AND PLASTICS**

Measure Time Intervals

From 10 Microseconds to 3 Seconds

The time interval between any two components in electrical, mechanical or electro-mechanical systems can *now* be measured, *simply* and *accurately*, with American Chronoscope Equipment.

The Model 211 Input Adapter used in conjunction with the Model 110 American Chronoscope separates the functions of STARTING and STOPPING the measurement of time. Simply connect the Start and Stop leads from the adapter to any two components of a system under test. Only the first complete elapsed time interval presented is accepted. This reading is indicated on the Chronoscope and remains fixed until reset.

PRICES

Model 110 Chronoscope $475
Model 211 Input Adapter . . . $265

For complete description on these and other Chronoscopes and Adapters, write for Bulletin 200A

American Chronoscope

CORPORATION

316 WEST FIRST ST. MOUNT VERNON, N. Y.

H. J. Reich, F. Hamburger, Jr., J. D. Reid, and A. V. Eastman.

Taxicab Radio Advances

INITIAL use of commercial radio communications equipment in the 450 to 460-mc band for the general mobile radio services was recently announced by Link Radio Corp., New York, N.Y. A pioneer move by two major taxicab companies in the uhf range was made officially in a request by the Yellow Cab Co. and the Cab Sales and Parts Corp., both of Chicago, Ill., to the FCC for what will eventually call for the installation of 3,666 mobile units and 16 base stations.

Under the mobile radio service rules established by the FCC in May 1949, the taxicab service was allocated 10 frequencies in the 450 to 460-mc band for developmental purposes, ranging from 452.05 to 452.95 mc. Commercial application was made permissible by the FCC in its directive of May 1949. The radio services which may use the 450 to 460-mc band are remote pickup broadcast; land transportation, which includes railroads, taxicabs and urban transit; public safety, which includes police, fire, forestry-conservation, highway maintenance and special emergency; industrial, which includes power radio, petroleum, forest products, motion picture, relay press and special industrial; and domestic public.

The system applied for in the construction permit request will use eight multiple main-station transmitters to cover the city in checkerboard fashion so that the traffic-handling capability of the radio circuits may be multiplied to enable dispatchers to control, via two-way radio, a large number of taxicabs in the Chicago area.

Each main station transmitter will have an output of 100 watts and each mobile transmitter will have an output of 10 watts.

Radio Engineers Announce Awards

ROBERT B. DOME, electrical consultant for General Electric Co., Syra-

MORE THAN
50,000 TV SETS
MONTHLY
rightly rely on

J S C
Twin
Lead
300 ohm
Television
Transmission
Wire

TV manufacturer, installation engineer, TV sponsor and televiewer all form an inseparable chain, securely linked by the world's finest television transmission wire. J S C is justly proud of its important role in the development and progress of television. Rigid adherence to the principle of "quality before quantity" will pave the way to greater accomplishments for J S C !

Write for Descriptive Pamphlet.

JERSEY SPECIALTY CO.
Little Falls, New Jersey
All Phones:
Little Falls 4-0784, 1404, 1405

Coil Insurance
FOR FAMOUS PRODUCTS

PARAMOUNT Spiral Wound PAPER TUBES
Protect Coil Accuracy and Stability in Countless Applications

Years of specialized "know-how" easily enable PARAMOUNT to provide exactly the shape and size tubes you need for coil forms and other uses. *Hi-Dielectric. Hi-Strength.* Kraft, Fish Paper, Red Rope or any combination wound on automatic machines. Wide range of stock arbors. Special tubes made to your specifications or engineered for you.

NEW! Moisture-Resistant *Shellac-Bonn* Kraft Paper Tubing. Heated shellac forms a bond which prevents delaminating under moisture conditions.

WRITE ON COMPANY LETTERHEAD FOR STOCK ARBOR LIST OF OVER 1000 SIZES

Paramount PAPER TUBE CORP.
616 LAFAYETTE ST., FORT WAYNE, IND.
Manufacturers of Paper Tubing for the Electrical Industry

NOW!
SPEED UP ALL SOLDERING WITH
UNGAR
FEATHER-LIGHT SOLDERING PENCILS WITH
HI-HEAT
INCREASED WATTAGE
TIPS

For use with No. 776 Handle & Cord Set

Stop wrestling with *big* irons. New HI-HEAT TIPS in your Ungar Electric Soldering Pencil produce a really versatile tool that'll perform on a par with the big, bulky 100-150 watt irons. If you can't get immediate delivery, please be patient, for production hasn't *yet* caught up with demand. Ask your supplier for No. 1238 Pyramid or No. 1239 Chisel. List price, $1.25 each.

Ungar ELECTRIC TOOL CO., Inc.
LOS ANGELES 54, CALIFORNIA

MUSIC for MERMAIDS-

University Speakers functioning under water—
This is the submergence-proof MM-2F, designed for tough naval combat and railroad service. Like all UNIVERSITY speakers, it more than meets requirements! This one is installed and operates year-round for swimming instruction.

University LOUDSPEAKERS
...will do more!
...last longer!
...sound better!

UNIVERSITY ENGINEERS, through painstaking research, recognize both idiosyncrasies of the human ear and the severe conditions under which sound equipment must many times be called upon to operate. They meet this double challenge by combining the finest engineering human ingenuity can devise with rugged, all-weather, all-climate construction. The result is better-performing, super-dependable reproducers. For reliability plus, for installations that function day-in, day-out under the most gruelling conditions — specify UNIVERSITY loudspeakers.

Write for the new
TECHNILOG
Contains a wealth of useful data for engineers, installation men and service personnel. Reserve your copy today!

Address requests to DESK 12

UNIVERSITY LOUDSPEAKERS • INC
80 SO. KENSICO AVE., WHITE PLAINS, N Y

COAXWITCH

COAXIAL SELECTOR SWITCH

50 Ohms—
Type N Connectors—Manually Controlled
Low VSWR—4 Models

CUT-A-WAY VIEW, MODEL 74



The COAXWITCH is an RF switch for use in coaxial circuits where it is important that the 50 OHM impedance of the cables be maintained. In a circuit sense, this switch consists of two pairs of "N" connectors spaced 4½" apart using RG-8/U as the connecting link. The COAXWITCH itself introduces no VSWR other than that of connectors. Characteristic impedance is maintained thru all switch details. Cut-away view shows that shield as well as center conductor is switched. Beryllium copper contacts, on the gooseneck, mate directly with male "N" (Type UG-21B/U) connectors, which connect directly to back plate of switch. Since all connectors come out in line with axis of switch, right angle connectors are usually unnecessary.

Literature Gladly Sent



BIRD ELECTRONIC CORP.

Instrumentation for Coaxial Transmission

1800 East 38th Street • Cleveland 14, Ohio

West Coast Representative • NEELY ENTERPRISES • Hollywood 46, Calif.

INTERMODULATION METER *Model 31*

- *Completely Self-Contained*
- *Direct Reading For Rapid, Accurate Measurements*

To insure peak performance from all audio systems; for correct adjustment and maintenance of AM and FM receivers and transmitters; checking linearity of film and disc recordings and reproductions; checking phonograph pickups and recording styli; checking record matrices; adjusting bias in tape recordings, etc.

GENERATOR

LOW FREQUENCY: 60 cycles.*
HIGH FREQUENCY: 3000 cycles.*
LF/HF VOLTAGE RATIO: Fixed 4/1.
OUTPUT VOLTAGE: 10v. max. into high impedance or +5 DBM matched to 600 ohms.
OUTPUT IMPEDANCE: 2000 ohms.
RESIDUAL IM: 0.2% max.
*(*Other frequencies on special order)*

ANALYZER

INPUT VOLTAGE: Full scale ranges of 3, 10 and 30 volts RMS. Less than one volt of mixed signal is sufficient for operation.
INPUT IMPEDANCE: Greater than 400 K ohms.
INTERMODULATION: Full scale ranges of 3, 10 and 30%.
ACCURACY: ±10% of full scale.
OSCILLOSCOPE connection at meter.

MEASUREMENTS CORPORATION

BOONTON NEW JERSEY

cuse, N. Y., will be awarded the Morris Liebmann Memorial Prize for 1951 by the IRE for his contributions to the intercarrier sound system of television reception, wide-band phase-shift networks, and various simplifying innovations in f-m receiver circuits. The award will be presented at the Institute's annual banquet on March 21, 1951, at the Waldorf-Astoria Hotel in New York City.

Other 1951 awards which will be presented at that time are as follows:

Alan B. MacNee, assistant professor of electrical engineering at the University of Michigan, Ann Arbor, Mich., will receive the Browder J. Thompson Prize for his paper "An Electronic Differential Analyzer," which appeared in the November, 1949 issue of the *Proceedings of the IRE*. The award is given annually to the author under thirty years of age for that paper recently published by the Institute which constitutes the best combination of technical contribution to the field of radio and electronics and presentation of the subject.

The Harry Diamond Memorial Award, given only to persons in government service, will be bestowed on Marcel J. E. Golay, Signal Corps Engineering Laboratories, Fort Monmouth, N. J., for his contributions in the over-all Signal Corps research and development program, and particularly for his accomplishments leading toward a reduction in the infrared-radio gap.

Willis W. Harman, associate professor at the University of Florida, Gainesville, Fla., will receive the Editor's Award, established to stimulate the use of good English in technical writing, for his paper "Special Relativity and the Electron," which appeared in the November 1949 issue of the *Proceedings of the IRE*.

IRE-RTMA Fall Meeting

THE TWENTY-SECOND annual Fall Meeting of members of the IRE and the RTMA Engineering Department was held Oct. 30-Nov. 1 at the Hotel Syracuse in Syracuse, New York, with a total registration of over 600.

At the general session on Monday

TOROIDAL? LAMINATED?

Your filter or inductor problem may be best solved by using toroids. Or the problem may require the use of laminations. Acme is completely equipped to design and produce, to your specifications, using whichever construction method best suits the purpose.

Acme ELECTRONICS

Division of Acme Metal Die, Inc.
212 E. 17th St., Los Angeles 15, PRospect 7457

Wave Filters • Delay Lines • Magnetic Amplifiers • Special Transformers & Chokes • Toroidal, Universal & Solenoid Wound Inductors

---

S·S·White MOLDED RESISTORS

The All Weather Resistors

Of particular interest to all who need resistors with inherent low noise level and good stability in all climates



STANDARD RANGE

1000 OHMS TO 9 MEGOHMS

Used extensively in commercial equipment including radio, telephone, telegraph, sound pictures, television, etc. Also in a variety of U. S. Navy equipment.

HIGH VALUE RANGE

10 to 10,000,000 MEGOHMS

This unusual range of high value resistors was developed to meet the needs of scientific and industrial control, measuring and laboratory equipment — and of high voltage applications.

SEND FOR BULLETIN 4906

It gives details of both the Standard and High Value resisters, including construction, characteristics, dimensions, etc. Copy with Price List mailed on request.

THE S.S.White INDUSTRIAL DIVISION
DENTAL MFG. CO.
Dept. R 10 East 40th St.
NEW YORK 16, N. Y.

Greatest PORTABLE of them all!

AMPEX

MAGNETIC TAPE RECORDER

15,000 cps • 7½ inches per second

HALF TRACK!

- Extended range 15,000 cycle half-track recording at 7½ inches per second.
- Incredible performance that equals or exceeds most full-track 15 i.p.s. recorders.
- Saves 75% on tape by combining 132 min. of recording on a single 2400-ft. N.A.B. reel.
- Can be furnished with Single Track Heads.

Write for Complete Specifications and Control Arrangement

AMPEX ELECTRIC CORPORATION
San Carlos, California

STANDARD OF THE GREAT RADIO SHOWS

STANDARDIZE ON Standard • STANDARDIZE ON Standard • STANDARDIZE ON Standard • STANDARDIZE ON Standard

FOR FREQUENCY

Stability

IN

Mobile

EQUIPMENT . . . .

make sure your crystals are made by Standard Piezo.

For years, our Crystals have been standard as original equipment with leading manufacturers and for replacement purposes by large operators of mobile equipment.

Precise, accurate, Standard Piezo Crystals are available for *ALL* types of mobile communication equipment.

Request catalog E for complete details.

Standard Piezo COMPANY
CARLISLE, PENNSYLVANIA

Kahle specialists in custom-built, ultra-precision ELECTRON TUBE MACHINERY

KAHLE CUSTOM-BUILDS machines to make the exact tubes you require—from big 20-inchers to tiny sub-miniature—from laboratory types to those for high-speed production. Kahle puts each unit through exhaustive trial runs in our plant to assure trouble-free operation in yours.



#1384 Button Stem Machine for Sub-Miniature Tubes →

A 12-head with upper and lower moulds on every head. Dual-motor drive. Indexing by barrel cam and rollers totally enclosed in oil. The button is ¼" in diameter with five long wires. Available for any stems with any number of heads. Hand fed, but available with automatic feeds.

Production-boosting, labor-saving equipment for complete manufacture of cathode ray tubes, standard, miniature and sub-miniature radio tubes, sub-miniature tubes, fluorescent lamps, photocells, x-ray tubes, glass products.

Consultations invited
Send for our new catalog

Kahle ENGINEERING CO.
1309 Seventh Street, North Bergen, New Jersey

ELECTRONICALLY REGULATED
LABORATORY POWER SUPPLIES

RACK MODEL 32

• STABLE • DEPENDABLE • MODERATELY PRICED •

STANDARD RACK MOUNTING PANEL SIZE 10½" x 19" DEPTH 9" WEIGHT 35 LBS

- **INPUT:** 105 to 125 VAC, 50-60 cy
- **OUTPUT #1:** 200 to 325 VDC at 300 ma regulated
- **OUTPUT #2:** 6.3 Volts AC CT at 5A unregulated
- **OUTPUT #3:** 6.3 Volts AC CT at 5A unregulated
- **RIPPLE OUTPUT:** Less than 10 millivolts rms

For complete information write for Bulletin E

LAMBDA ELECTRONICS CORPORATION
CORONA NEW YORK

COMPOUNDS

Scientifically compounded for specific applications from waxes, resins, asphalts, pitches, oils, and minerals. Available in wide range of melting points and hardnesses. Special potting compounds are heat conducting and crack resistant at extremely low temperatures. Recommendations, specific data, and samples will be furnished on request.

for

IMPREGNATING
radio coils
transformer coils
ignition coils
wire coverings
paper tubes and forms
porous ceramics

SEALING
condensers
batteries
switch base terminals
socket terminals
light fixtures

DIPPING
Coils
Transformers
Condensers

POTTING
Radio Transformers
Light Units
Loading Coils
Condensers

BIWAX CORPORATION

BIWAX

3445 HOWARD STREET
SKOKIE, ILLINOIS

SPECIAL TUBE SOCKETS

For high power tubes Gates has designed several very attractive tube sockets.

To the left, a socket for the Eimac 3X2500 tube.

To the right, a socket for such tubes as the 889R, 891R, 892R and others.

Available in small or large quantities at proportional prices.

GATES RADIO COMPANY
Manufacturing Engineers Since 1922
QUINCY, ILLINOIS, U. S. A.

electronics
PUBLISHES
13
ISSUES YEARLY
including the
MID-JUNE
BUYERS' GUIDE

morning, papers presented included one on the use of the noise diode for determining amplifier sensitivity and another on wideband impedance matching between a resonant antenna and a line.

The Monday afternoon quality control session covered efficient use of data for quality control, the General Electric quality control indicator, the control of averages in radio tube manufacture, and the human aspect of engineering quality into a product.

At a joint session with the Technology Club of Syracuse on Monday evening, Dr. Allen B. Du Mont spoke on problems of the television industry, including the color tv controversy and the freeze on new tv station construction.

Both sessions on Tuesday were devoted to tv and much interest was shown in a paper titled, "An Analysis of Color Television," by A. V. Loughren of Hazeltine Electronics Corp. (Our cover last month showed four of the illustrations used in this presentation.) At the same session, two new tubes were described—the RCA low-noise double triode which is used as an r-f and i-f amplifier in tv receivers, and the GE miniature magnetron for use in the uhf tv band.

The RTMA award was presented posthumously to L. C. F. Horle at the Tuesday night banquet meeting. The late Mr. Horle was, until his recent retirement, RTMA's chief engineer.

The audio session on Wednesday morning consisted of papers on the mechanics of the phonograph pickup, a lightweight pickup and tone arm, sound pickup in high ambient noise, and the recently adopted RTMA standards for sound equipment.

It was announced that the Fall Meeting next year will be held in Toronto, Canada.

BUSINESS NEWS

ELECTRONIC CONTRACTORS INC., Philadelphia, Pa., is a new firm formed by John C. Merman and four other television service contractors for the purpose of entering into defense and private manu-

If we could read the minds of engineers and scientists for a year ahead . . .

And if we could foresee equipment changes made necessary by rapidly changing conditions . . .

Then, and only then, would it be feasible to produce *standard* Transicoil Control Motors and gear trains. As things stand, however, each Transicoil motor and its gearing assembly is specifically made for a particular job—*and that spells real efficiency.* Transicoil makes 'em the way you want them. They're shipped to you ready for instant use without any worries about trying to adapt standard units that are only "almost right".

HANDY CONTROL MOTOR DATA CHART
Send for your free copy today.

Transicoil Products: **CONTROL MOTORS, PRECISION GEAR TRAINS, INDUCTION GENERATORS, SERVO AMPLIFIERS**

TRANSICOIL
CORPORATION

107 GRAND STREET **NEW YORK 13, N.Y.**

DeJUR makes great little meters . . .

SEALED PANEL METERS

1 MINIATURE 1½" SQUARE
2 WATERPROOF SEALED
3 OBTAINABLE WITH LUCITE SCALES AND MAGNETIC SHIELDING

Larger sizes available

2½" round
2½" square
3½" round
3½" square
4" square

JAN-1-6 and A.S.A. specifications

Built to Conform to Forthcoming JAN Spec. for 1½" Meters

DeJUR USA

DeJUR AMSCO CORPORATION
45-01 NORTHERN BOULEVARD, L. I. C. 1, N. Y.
MANUFACTURERS OF SCIENTIFIC PRECISION EQUIPMENT FOR OVER A QUARTER OF A CENTURY

New Type 2A TAP SWITCHES

HAVE A CONSTANT CONTACT RESISTANCE OF

ONLY 1 or 2 MILLIOHMS!

These high quality switches with up to 24 contacts were specifically developed to meet the need for rugged precision instrument switches that have longer operating life and are economical components in competitively priced electronic instruments and military equipment.

●

Write for Technical Bulletin No. 28.

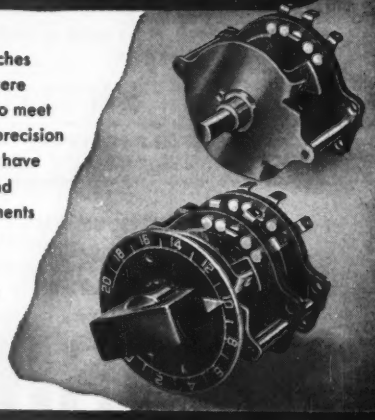

TECH LABORATORIES PALISADES PARK NEW JERSEY

facturing contracts that require electronics background and experience.

GENERAL ELECTRIC CO. will reopen a former radio tube plant in Utica, N. Y., and convert it for the manufacture of emergency radio communications equipment. The new plant is expected to be in full operation by June 1951, employing about 425 people.

ELECTRICAL REACTANCE CORP. recently dedicated its new 70,000-sq-ft plant in Olean, N. Y. The plant will be devoted to the manufacture of capacitors, resistors and choke coils.

RADIO RECEPTOR CO., INC., manufacturer of radio and electronic components and complete assemblies for industry and government, has purchased a 90,000-sq-ft factory in Brooklyn, N. Y., to house its expanding divisions.

SARKES TARZIAN, INC., has begun operation of its new 53,000-sq-ft plant in Batavia, Ill., to increase production of television picture tubes.

NATIONAL ELECTRONICS INC., Geneva, Ill., now has a new brick factory addition to its plant which increases total floor space by 80 percent and provides facilities for greater production of thyratrons, rectifiers and mercury pool tubes.

WESTERN ELECTRIC CO. has leased the Pomona Mills plant near Greensboro, N. C., to manufacture electronic equipment for the armed forces. Approximately 2,000 persons will be employed.

THE BARRY CORP., Cambridge, Mass., is erecting a new plant in Watertown, Mass., that will more than double its present floor space for production of shock mountings and vibration isolators.

NORTHWESTERN UNIVERSITY, Evanston, Ill., will build a 4½-million-volt electrostatic accelerator for nuclear research, to be used by staff members and graduate students doing research work, and in connection with special government projects. Cost of the project will be approxi-

The New STAVER
MINI-SHIELD
TRADE MARK REG. AND PAT. PEND.

The shield that fits all Miniature Tubes

A flexible shield that snugly fits all miniature tubes because it compensates for all variations in tube dimensions. Mini-Shields are made for both T5½ and T6½ bulb tubes. Send for catalog sheet.

THE Staver COMPANY
INCORPORATED

91 PEARL ST. • BROOKLYN 1, N. Y.
ULSTER 5-6303

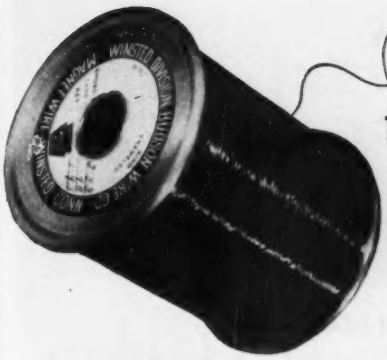

fine wire made finer

custom drawn
custom insulated
custom spooled . . .
to your most exacting requirements

◎ Specify the electrical properties, flexibility, tensile strength, laying speed, uniformity and other characteristics you must have. Our Hudson and Winsted Divisions will meet and maintain your specifications.

Yes, "Fine Wire Made Finer!" That's why Hudson-Winsted fine wires are the first choice of electrical, radio-TV and electronic manufacturers whose products are noted for reliability and long life.

◎ Tell us your wire problems and requirements. Our research, engineering and production facilities are at your disposal. Let us quote!

HUDCO Winco hudson wire company

general offices: ossining, n. y. ◎ winsted division, winsted, conn.

STAY ON THE AIR
WHEN POWER FAILS...with
an ONAN Electric Plant

Model 10EL, 10KW A.C.

When storms, floods, or fires interrupt electricity and force you off the air, you lose listeners and income. Guard against loss, assure vital public service during emergencies by installing an Onan Electric Plant. Onan Standby Electric plants serve many network and private stations. Automatic models to 35,000 watts.

PORTABLE ELECTRIC PLANTS FOR MOBILE RADIO USES

Supply A.C. power for broadcasting at scene of events. Can be carried by hand or in trunk of car. Weigh as little as 80 pounds. A.C. models 350 to 35,000 watts.

Write for FREE *Folder*

Onan
D. W. ONAN & SONS INC.
7018 University S. E.
Minneapolis 4, Minnesota

Quality controlled

Serving industry with fine jewels since 1913

Sapphire and Glass
JEWEL BEARINGS

Performance proved for precision and long life by world's leading makers of *electrical, aircraft and timing instruments; compasses; weather recorders; all testing, indicating and recording apparatus.*

Unset or set in screws or bushings to suit requirements. Write for brochure.

Richard H. Bird & Co., Inc.
1 Spruce Street, Waltham, Mass.

Pioneer in Radio Engineering Instruction Since 1927

CAPITOL RADIO ENGINEERING INSTITUTE

An Accredited Technical Institute

ADVANCED HOME STUDY AND RESIDENCE COURSES IN PRACTICAL RADIO-ELECTRONICS AND TELEVISION ENGINEERING

Request your free home study or resident school catalog by writing to:

DEPT. 281C
16th and PARK ROAD, N. W.
WASHINGTON 10, D. C.
Approved for Veteran Training

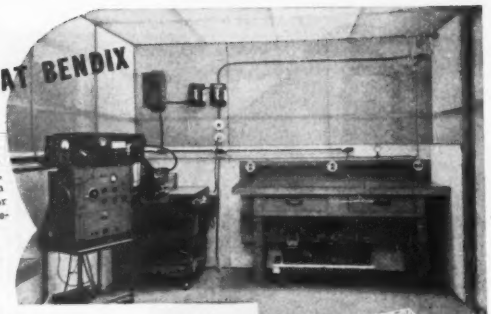

ON THE JOB AT BENDIX

This Ace Screen Room in the laboratories of the Scintilla Magneto Division of the Bendix Aviation Corp. at Sidney, N. Y. provides maximum shielding efficiency for the accurate measurement of r-f fields.

HERE'S MAXIMUM
Screen Room Efficiency!

ACE Screen Rooms provide attenuations of 100 db.—and higher—at frequencies as low as 0.15 and as high as 10,000 mc. Rooms are available for attenuations as high as 140 db. Ace shielding characteristics have been determined by reputable electronic laboratories. Write, wire or 'phone for descriptive bulletin.

SHIELDED ACE ROOMS PHILA. PA.

ACE ENGINEERING & MACHINE CO., INC.
3644 N. Lawrence St.
Philadelphia 40, Pa. REgent 9-1019

SLOW SWEEPS
HIGH SENSITIVITY

- *Band Pass—DC-2mc*
- *Sensitivity—5mv/cm maximum*
- *Sweeps—.3 sec/cm to 3 usec/cm*

Type 512 Oscilloscope

Accurate observation and measurement of slowly recurring phenomena is difficult, if not impossible, by conventional oscilloscopic techniques. The Tektronix Type 512 Cathode Ray Oscilloscope, combining as it does direct-coupled amplifiers, slow sweeps and high accuracy, is recognized by a constantly increasing number of researchers as being an indispensable laboratory tool. New and fruitful approaches to the problems encountered in research are permitted by these features. *$950.00 f.o.b. Portland, Oregon.*

Write today for detailed specification of Type 512 and other Tektronix instruments.

TEKTRONIX, INC.
712 S. E. Hawthorne Blvd. Portland 14, Ore.

mately $150,000 exclusive of the housing.

MINNEAPOLIS-HONEYWELL REGULATOR CO. recently launched a road show, called the Parade of Progress, which will cover more than 60 cities. Purpose of the traveling show is to demonstrate the latest electronic, electric and pneumatic control systems recently developed and now in production.

PEMCO CORP., Baltimore, Md., manufacturer of porcelain enamel finishes and ceramic chemicals, is expanding its plant by the addition of more than 30,000 sq ft of floor space to existing facilities.

AMERICAN ELECTRONEERING CORP., producers of aircraft instrument test equipment, power supply units and signal generators, have moved to new larger quarters at 5025 W. Jefferson Blvd., Los Angeles, Calif., to consolidate production facilities under one roof and make room for stepped up armed-service activities.

RADIO CRAFTSMEN, INC., Chicago, Ill., makers of custom-built tv and radio chassis and electronic equipment, have acquired 12,000 sq feet of space at 4401 North Ravenswood, Chicago, to be used in tv production.

PERSONNEL

VINCENT SALMON of Stanford Research Institute has been elected chairman of the San Francisco Section, Audio Engineering Society. Other officers are: Harold Lindsay of Ampex Electric Corp., vice-chairman; Frank Haylock, secretary; Myron J. Stolaroff of Ampex, treasurer; and Walter T. Selsted, Jack Hawkins and Ross Snyder, executive board members.

L. E. RECORD has been promoted from supervisor of the engineering development and testing laboratories to division engineer of the cathode-ray tube division of General Electric Co., Syracuse, N. Y.

JOHN T. WILNER, engineering director of stations WBAL and WBAL-TV, has been elected vice-president in charge of engineering

YOU'RE THERE WITH A

PREMAX 75

MOBILE ANTENNA

Center-Loaded Type

A mobile Antenna that'll give you high gain and enable you to work distant stations. This center-loaded Antenna gives 4.5 d.b. optimum with a 2.5 d.b. over the band average improvement. This adds to the 6 d.b. basic gain over a straight whip. Easy to change bands quickly for 10, 15, 20 and 40 meters.

Also available for 2374 CAP, 3105 Airport, 2-3 mc. Marins —plus any spot frequency on request.

PREMAX PRODUCTS

DIVISION CHISHOLM-RYDER CO., INC

5101 Highland Ave. Niagara Falls, N. Y.

An invitation from Lockheed in California to

SENIOR ELECTRONIC SYSTEMS ENGINEERS

Lockheed invites you to participate in its long-range production program, developing the aircraft of the future.

Lockheed offers an attractive salary commensurate with your ability and background, a future in aeronautical science. In addition, Lockheed provides generous travel allowances for those who qualify.

If you have:

1. **An M.S. or Ph.D. in Electrical Engineering or Physics—**
2. **A minimum of three years' experience in advanced electronic systems development, including radar microwave techniques, servomechanisms, computers and fire control—**
3. **Familiarity with airborne electronics equipment requirements—**

Write today—giving full details as to education, experience and salary requirements. Address:

Karl R. Kunze, *Employment Manager*
LOCKHEED Aircraft Corporation
Burbank, California

FOR YOUR

STAINLESS STEEL FASTENERS...

IT'S **ALLMETAL** for quality and delivery

ALLMETAL, Specialists in Stainless, Produce Stainless Products Exclusively

ALLMETAL

the leading source for Stainless Screws, Nuts, Bolts, Washers, Pins, Rivets. Made right, Priced right. "AN" and Standard Types carried in stock. Phillips Recessed Head Screws and Specials available too.

WRITE FOR CATALOG C

MANUFACTURERS SINCE 1929

STAINLESS STEEL FASTENERS

ALLMETAL

SCREW PRODUCTS COMPANY, INC.

33 GREENE STREET NEW YORK 13, N. Y.

For *Precision* Washers...For *Precision* Stampings...

WHITEHEAD STAMPING CO.

A preferred source of precision-made WASHERS and STAMPINGS. 46 years of experience and up-to-the-minute facilities, assure highest quality and service.

EST. 1903

WHITEHEAD STAMPING CO.

1691 W. Lafayette Blvd. Detroit 16, Michigan

SCOPE DOLLY

Model 1

Convenient Height and Viewing Angle
Adjustable to Hold Portable Scopes
Ball Bearing Swivel Rubber Tired Casters
Lightweight Aluminum Construction
Recommended by Laboratories Wherever Used

$27.00 *Postpaid in continental U.S.A. if cash accompanies order.*

Unique Devices

Ferry Ave. at 12 St. • P.O. Box 555 • Camden 1, N.J.

of Hearst Radio, Inc., He was formerly engineer-in-charge of CBS television development.

CHARLES D. PERRINE, JR., formerly manager of the electronics department of Fairchild Engine and Airplane Corp.'s guided missiles division, has joined the electronics and guidance section in Consolidated Vultee's San Diego Division engineering department.

C. D. Perrine, Jr.

M. A. Acheson

M. A. ACHESON, formerly chief engineer of the radio tube division of Sylvania Electric Products Inc., Emporium, Pa., has been transferred to the staff of E. Finley Carter, vice-president in charge of engineering at Sylvania's New York office.

HARRY STOCKMAN, former consulting engineer to industrial firms in the Boston area, has been appointed director of research of the Tobe Deutschmann Corp., Norwood, Mass.

G. F. CALLAHAN, formerly division engineer of the cathode-ray tube division of General Electric Co., Syracuse, N. Y., has been appointed staff assistant to K. C. DeWalt, manager of the division.

LEIGH W. HAEFLE, with Air Reduction Co., New York, N. Y., since 1938, was recently appointed assistant chief engineer of the company's general engineering department.

DAVID S. RAU, formerly assistant to the vice-president in charge of engineering, is now assistant vice-president and chief engineer of RCA Communications, Inc.

JOHN F. BYRNE, formerly vice-president and chief engineer of Airborne Instruments Laboratory, Inc., Mineola, N. Y., has been ap-

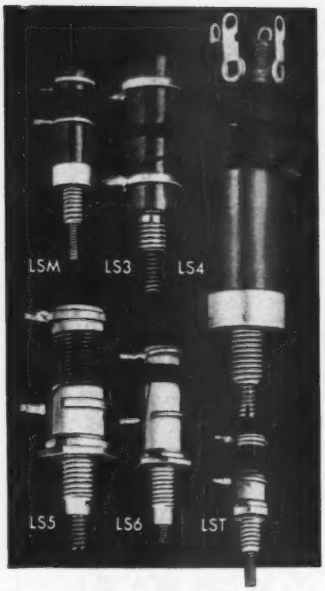

Which Of These Coil Forms Best Fits YOUR Needs?

Coil Forms Only, Or Coils Wound To Your Specifications . . . Cambridge Thermionic will furnish slug tuned coil forms alone or wound with either single layer or pie type windings to fit your needs, in high, medium or low frequencies . . . and in small or large production quantities.

See table below for physical specifications of coil forms.

SEND COMPLETE SPECIFICATIONS FOR SPECIALLY WOUND COILS

Coil Form	Material	Mounting Stud Thread Size	Form O.D.	Mounted O.A. Height
LS7	L-5 Ceramic	8-32	3/8"	19/64"
LS6	L-5 Ceramic	10-32*	1/4"	37/64"
LS5	L-5 Ceramic	1/4-28*	5/8"	1 1/16"
LSM	Phenolic Paper	8-32	3/4"	37/64"
LS3	Phenolic Paper	1/4-28	5/8"	1 1/16"
LS4†	Phenolic	1/4-28	1/2"	2"

*These types only provided with spring locks for slugs.
†Fixed lugs. All others have adjustable ring terminals.
All ceramic forms are silicone impregnated. Mounting studs of all forms are cadmium plated.



custom or standard the guaranteed components

CAMBRIDGE THERMIONIC CORP.
437 Concord Ave., Cambridge 38, Mass.
West Coast Stock Maintained By: E. V. Roberts, 5014 Venice Blvd., Los Angeles, California

THE WIDE BAND POCKETSCOPE®
BY WATERMAN



Another Waterman POCKETSCOPE confirming the obsolescence of conventional oscilloscopes. Characterized by wide band amplifier fidelity without peaking as well as amazing portability. S-14-B POCKETSCOPE is ideal for laboratory and field investigation of transient signals, aperiodic pulses, or recurrent electrical wave forms.

Vertical channel: 50mv rms/inch, with response within −2DB from DC to 700KC, and pulse rise of 0.35μs. Horizontal channel: 0.3v rms/inch with response within −2DB from DC to 200KC, and pulse rise of 1.8μs. Non-frequency discriminating attenuators and gain controls, with internal calibration of trace amplitude. Repetitive or trigger time base, with linearization, from ½cps to 50KC, with ± sync. or trigger. Trace expansion. Filter graph screen. Mu metal shield. And a host of other features.

WATERMAN PRODUCTS CO., INC.
PHILADELPHIA 25, PA.
CABLE ADDRESS: POKETSCOPE

WATERMAN PRODUCTS INCLUDE:

S-10-B GENERAL	POCKETSCOPE
S-11-A INDUSTRIAL	POCKETSCOPE
S-14-A HI-GAIN	POCKETSCOPE
S-15-A TWIN TUBE	POCKETSCOPE
S-21-A LINEAR TIME BASE	

Also RAKSCOPES, LINEAR AMPLIFIERS, RAYONIC® TUBES and other equipment

WATERMAN PRODUCTS

pointed associate director of research in the division of communications and electronics of Motorola, Inc., Chicago, Ill.

EDWIN LOCKWOOD, formerly senior research engineer for Electro-Mechanical Research, Inc., Ridgefield, Conn., has been appointed chief engineer of Price Electric Corp., Frederick, Maryland, manufacturers of electronic relays.

E. Lockwood

L. C. Smith

LESTER C. SMITH, formerly instructor in electrical communications at MIT, has been appointed chief engineer of Spencer-Kennedy Laboratories, Inc., Cambridge, Mass.

CHARLES N. KIMBALL, formerly technical director of Bendix Research Laboratories, Detroit, Mich., has been elected president of Midwest Research Institute, Kansas City, Mo.

CARL E. SCHOLZ, formerly vice-president and chief engineer in charge of Mackay Radio and Telegraph Company's engineering and plant department, was recently appointed vice-president and chief engineer of All America Cables and Radio, Inc., and The Commercial Cable Co.

ROBERT H. WEINMANN, formerly assistant vice-president of Geovision, Inc., New York City, and chief electronic engineer for the Rieber Research Laboratory of the same city, has been appointed chief engineer of Danco Instruments, Inc., Huntington Station, L. I., N. Y.

JAMES L. LAWSON, former head of the nuclear investigations division, has been named manager of the newly formed Electron Physics Divisions of the General Electric Research Laboratory, Schenectady, N. Y.

Sintered Permanent Magnets

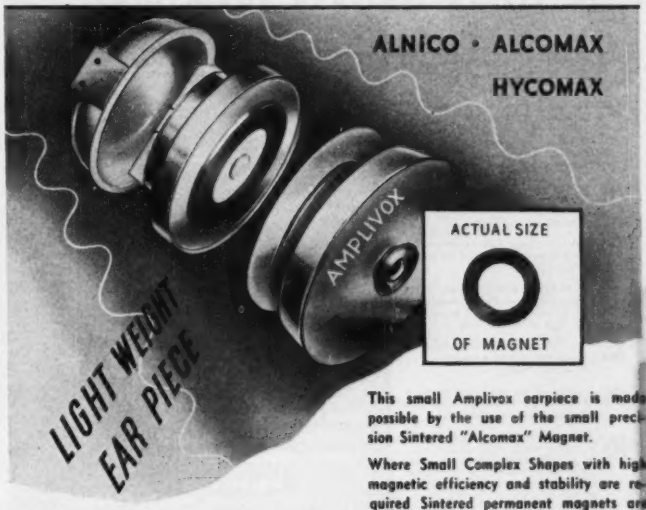

This small Amplivox earpiece is made possible by the use of the small precision Sintered "Alcomax" Magnet.

Where Small Complex Shapes with high magnetic efficiency and stability are required Sintered permanent magnets are essential.

By courtesy of AMPLIVOX, LTD.

MUREX LTD. *(Powder Metallurgy Division)* • RAINHAM • ESSEX • ENGLAND

London Sales Office: Central House, Upper Woburn Place, W.C. 1

HIGHEST STABILITY in Quality Communications

In today's high-speed telegraph, teleprinter and multi-channel radio communication systems—more than ever before—utmost stability is a vital need. Northern Radio's *exclusive* answer is the Type 105 Model 4 FREQUENCY SHIFT KEYER. Its highly stable oven has a temperature control of ± 0.1° C at 60°, with heaters on 4 sides of the inner oven—giving this unit frequency stability unmatched in the industry. And, greatest ease of operation is assured by its completely direct-reading dials.

See the specifications on this outstanding model in the 1950 Electronics Buyers Guide. For complete data on the precision-built Northern Radio line, write today for your free latest Catalog E-1.

NORTHERN RADIO COMPANY, INC. 143-145 West 22nd Street New York 11, N. Y.

Pace-Setters in Quality Communication Equipment

MICROPOT

PRECISION TEN-TURN POTENTIOMETER

1. You get permanent accuracy because the resistance wire is locked in place. It is precision positioned and moulded integrally with the housing.

2. You get permanently accurate settings, smooth action and low uniform torque provided by the stainless steel, precision ground, double thread lead screw guiding the moving contact.

3. You get precise positioning of the moving contact because of the two bearings supporting the rotor assembly.

4. You get good rigid terminals because they are moulded integrally with the housing.

5. Terminals soldered to ends of resistance element before moulding. Entire resistance circuit is an integral part of the housing.

6. You get accurate setting and resetting due to anti-backlash spring in contact guide.

7. You get a fine resolution because of the 43½" length of resistance wire in the spiral element.

8. You get a resistance output directly proportional to shaft rotation within ±0.1% of the total resistance. Every potentiometer is automatically machine tested for linearity at 101 points.



LINEARITY ACCURACY ± 0.1%

Units for immediate shipment:
1,000 to 30,000 ohm range.
Special resistance values made to order.

WRITE TODAY FOR ENGINEERING INFORMATION

GIBBS DIVISION
THE GEORGE W. BORG CORPORATION
DELAVAN • WISCONSIN

ZOPHAR

WAXES
COMPOUNDS

Anti-Corona high heat-resistant compounds for Fly Back Transformers.

Waxes and compounds from 100° F to 285° F Melting Points for electrical, radio, television, and electronic components of all types.

Pioneers in fungus-resistant waxes.

Our efficient and experienced laboratory staff is at your service.

ZOPHAR MILLS, INC.
112-130 26th Street,
Brooklyn 32, N. Y.

in point, omits the best part of the story.

It is true, as you observe, that the Alpine tower was designed for the operation of a series of transmissions simultaneously from antennas appropriately arrayed between the arms. The attempt, however, to start such pioneering work at Alpine by Paul Godley with the installation of a second transmitter was promptly vetoed by the then engineering czar of the FCC, Mr. Andrew J. Ring.

Time passes. Mr. Ring leaves the Commission. He enters private practice. In due course, Mr. Ring advocates an arrangement among Washington f-m licensees and prospective licensees to locate all stations in two groups, the stations to be arranged as to frequencies and location to give maximum coverage and minimum interference to the people of Washington.

The world moves on. Now, twelve years after the disapproval of what was attempted at Alpine, the erection of at least a half dozen antennas atop the Empire State Building in New York City enters the realm of FCC standards of good engineering practice. The French have a word for it—"It is to laugh."

EDWIN H. ARMSTRONG
Columbia University
New York, N. Y.

Due Credit

DEAR SIRS:

YOUR article "Electrodynamic Ammeter for VHF" in ELECTRONICS (*Electron Art, Sept. 1950*) does not credit the development of the electrodynamic ammeter to those responsible for it.

In 1934, Professor H. M. Turner suggested to Dr. P. C. Michel, a graduate student at Yale University, that he examine the field of current measurement at high frequencies and try to make a contribution to the art in his doctorate thesis. Dr. Michel perceived that the attempt to operate a conventional pointer caused the poor performance of the electrodynamic ammeters previously developed and, by allowing the short-circuited ring to oscillate, invented an absolute standard of current at high frequencies. When Dr. Michel came

If You Use Radio Parts

You Need SUN RADIO'S BIG NEW CATALOG

Sun Radio's New Electronic Parts catalog contains latest complete listings of component parts, instruments, tubes, wire, accessories. In an entirely new, easy-to-use, easy-to-file 8 1/2 x 11" format. For industry, research, universities, technical schools, technicians, engineers. Write for your FREE copy. Dept. C-E

Sun Radio & ELECTRONICS CO. INC.
122 124 DUANE ST. - NEW YORK 7, N.Y.

2 blocks North of Chambers St. - Est. 1922.
Hours: Daily 9-6, Saturday 9-4:30.

MICRODIAL
TEN TURN-COUNTING DIAL

Microdial is composed of two concentrically mounted dials . . . one for counting increments of each turn and the other for counting turns. The incremental dial has 100 equal divisions and is attached rigidly to the shaft so there is no backlash. Thus the contact position is indicated to an indexed accuracy of 1 part in 1000. Rotation is continuous in either direction. There are no stops on the Microdial assembly.

COMPACT . . . Microdial has same O.D. as Microbot . . . requires no more panel space.

CLEAR READING . . . Forced fast-reading tests showed only 1/20th as many errors with Microdial open window as with next most legible dial. Turn counter distinguishes between 0 and 10 turn readings, and accelerates to avoid confusion on readings near integral turns. Precise readings are made from larger dial with maximum separation of graduations and wide angle visibility.

CONVENIENT . . . delivered completely assembled with dials synchronized. Easily mounted in a few seconds. All dials may be locked.





Microdial . . . turn-counting dial, primarily designed for use on Microbot ten turn linear potentiometers . . . use it on any multiturn device having ten turns or less.

GIBBS DIVISION
THE GEORGE W. BORG CORPORATION
DELAVAN • WISCONSIN

Tensolite
TRADE MARK

MINIATURE WIRE
PLASTIC INSULATED WIRE AND CABLE

Insulators of Stranded Flexible Conductors from #20 to #40 AWG

- SHIELDED WIRES
- MULTI-CONDUCTOR CABLES
- TINSEL CORDAGE
- TEXTILE AND PLASTIC BRAIDS

Tensolite is devoted exclusively to high grade precision insulation of small diameter flexible materials to which its patented process is uniquely suited.

Special Constructions Made to Manufacturers Specifications

Free wire samples and descriptive literature sent to manufacturers, engineers, and purchasing executives — requesting same on company letterhead.

TENSOLITE
INSULATED WIRE CO., INC.
196 MAIN ST., TARRYTOWN, NEW YORK
Telephone Tarrytown 4-2616

MIL-T-27 CANS ARE STOCK ITEMS
AT Heldor



We can supply all standard sizes of MIL-T-27 cans with or without brackets, weld studs, centrifugal hot tinned, blind inserts, compression type hermetic seal bushings on 3/8"–1/2"–3/8"–3/4" centers, and stamped ratings. Custom sizes can also be supplied.

Our other services include special tube bending and specialized screw machine products.

Write for specifications and price list.

Heldor

HELDOR METAL PRODUCTS CORP.
NOTE NEW ADDRESS: 85 Academy St., Belleville 7, N. J.

If You Are Having Difficulty Maintaining Your Mailing Lists...

Probably no other organization is as well equipped as McGraw-Hill to solve the complicated problem of list maintenance during this period of unparalleled change in industrial personnel.

McGraw-Hill Mailing Lists cover most major industries. They are compiled from exclusive sources, and are based on hundreds of thousands of mail questionnaires and the reports of a nation-wide field staff. All names are guaranteed accurate within 2%.

When planning your direct mail advertising and sales promotion, consider this unique and economical service in relation to your product. Details on request.

McGraw-Hill Publishing Co., Inc.
DIRECT MAIL DIVISION
330 West 42nd Street New York, 18, New York

NOTHELFER
Special TRANSFORMERS
Proven by Past Performance
Over 25 years' experience in the manufacture of special transformers to meet individual requirements. Built in quality proved by years of actual use.
From 10 VA to 300 KVA Dry-Type only. Both Open and Encased. 1, 2, and 3 Phase. 15 to 400 cycles.
NWL
NOTHELFER
WINDING LABORATORIES
9 ALBEMARLE AVE., TRENTON 3, N. J.
NEMA

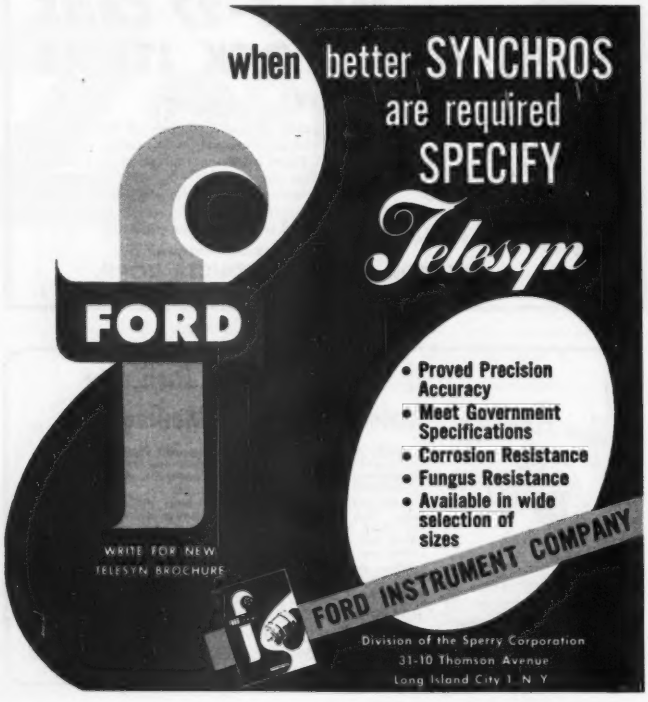

to the General Engineering and Consulting Laboratory of the General Electric Co. at Schenectady, he was assigned to a group vitally concerned with such standards. The group continued the development of the electrodynamic ammeter, extending its frequency range up to 350 megacycles.

This new current standard provided new knowledge of the true frequency characteristics of thermocouple ammeters and led to the invention of an improved thermocouple, U. S. Patent 2,199,247—T. A. Rich, H. R. Meahl and P. C. Michel—1939, which was used in the General Electric Low-Impedance Thermocouple Ammeter.

One early application of these new thermocouple ammeters was the solving of a problem for the National Bureau of Standards which had resulted from attempts to measure r-f output of electrotherapy machines. When these were tested by measuring output current with then commercially available thermocouple ammeters, efficiencies greater than 100 percent were indicated.

The writer was asked by the Bureau if General Electric would supply a satisfactory ammeter and took several developmental samples of the ammeter to Washington, which solved the immediate problem. While there, the writer suggested that the Bureau might want an electrodynamic current standard. Later, a quotation was requested on an electrodynamic current standard and on a set of the Low-Impedance Thermocouple Ammeters. The Bureau purchased a set of these new thermocouple ammeters but at the time, showed no further interest in the accompanying quotation on an electrodynamic current standard.

Some time later, the Bureau asked for further information and Dr. Michel loaned them a copy of his unpublished thesis.

The only published data we have since seen on work on the Electrodynamic Ammeter at the Bureau of Standards is CRPL Preprint 50–15 by Max Solow. There is no attempt in that preprint to attribute full credit for this development to the Bureau; in fact, proper refer-

ences are included, even the unpublished thesis.

H. R. MEAHL
General Engineering and Consulting Laboratory
General Electric Co.
Schenectady, N. Y.

Maxson, Not Maxon

DEAR SIRS:

IN the October, 1950 edition of ELECTRONICS an article was written by Jack Kritz entitled "Precision Phase Meter for Audio Frequencies." In the by-line for this article the name of the company was misspelled. It would be appreciated if, in the next edition, you would print a correction notice calling attention to the proper spelling of the company name.

THE W. L. MAXSON CORPORATION
Contracts Department
Engineering Division

Electronics Quiz

THIS MONTH'S puzzle problem was submitted by Walther Richter, Consulting Electrical Engineer, Allis-Chalmers Manufacturing Company, Milwaukee, Wisconsin.

After having designed and constructed an entirely conventional full-wave rectifier circuit feeding a purely resistive load, the direct current through which is to be adjusted to exactly one ampere, the ham doing the work is suddenly seized by a spasm of caution (obviously a purely fictitious person) and decides to fuse the circuit. At first he decides to place a one-ampere fuse in the center leg, that is, between the load and the center tap of the transformer. But then he realizes that this might not prevent damage to the transformer from a short occurring from plate to plate. He wishes to employ the smallest fuses that are just able to carry the load current.

Assuming that fuses were available in any desired rating, and would blow at exactly this rating, would the

because it's new, different, better, and in demand—
RADIO SHACK carries the Vector line
IN STOCK FOR IMMEDIATE DELIVERY
Write today for literature and prices!
FREE! 172-page 1951 Radio Shack catalog, the ONE authoritative electronics buying guide
VECTOR SOCKET TURRETS
(B) New Vector Plug-in Socket Turrets
Combines vacuum tube socket, tubular terminal post, octal style plug and shield can. Quickly replaceable, economical and convenient. Shows typical picture of assembled unit and main parts. shield can enclosure. Standard ring mounts plugs, mica-filled octal style with 2 pins (one optional). Sockets are standard ceramic grade, mica-filled octal. 7 pin miniature grade, as ordered. Terminal turret is grade G laminated phenolic tubing. Turret sections fastened together by No. 5-40 screws; easily detachable by removing base screws; mini-noval types carry tube shield base with bayonet lock. Tube shield not furnished.
PLUG-INS WITH OCTAL SOCKETS
Cat. No. | Type | Can
02-258 | B8-O | 2 x 1½"
02-259 | B10-O | 3 x 1½"
02-260 | B12-O | 3 x 2"
02-261 | C8-O | 3½ x 2"
02-262 | C10-O | 3 x 2"
02-263 | C12-O | 3 x 2"
PLUG-INS WITH 7-PIN MINIATURE SOCKETS
02-264 | B8-M | 2 x 1½"
02-265 | B10-M | 3 x 1½"
02-266 | B12-M | 3½ x 2"
MICA-FILLED "VECTOR" SOCKET-TURRETS
FAST, TIME, COSTS! IMPROVE HF PERFORMANCE, ACCESSIBILITY! MANUFACTURERS: WRITE US FOR QUANTITY PRICES!
Octal Socket Turrets
The RADIO SHACK Corp.
167 WASHINGTON ST., BOSTON, MASS.

the new PRECISION COIL BOBBINS
NO INSULATION STRIPS NEEDED
STRONGER MAGNETIC FIELDS
CLOSER WINDINGS
with Anchored Flanges . . . can't come loose!
Flanges are securely locked in place on a plastic-coated core to assure coils wound to closer tolerances—fewer rejects. Flange cannot slide to allow crowding of turns—wire cannot slip off coil form. Spiral winding — heavy heat-treated compression—overall impregnation. Made in any shape or size to your specs. of finest dielectric Kraft, fish paper, cellulose acetate or cimbination.
Write for FREE sample TODAY
PRECISION PAPER TUBE CO.
2041 W. Charleston St. • Chicago 47, Ill.
Plant #2, 79 Chapel St., Hartford, Conn. Also Mfrs. of dielectric paper tubes.

CONTACTS
FOR THE FIELD OF ELECTRONICS

The nonmelting SILICONE insulating and waterproofing compound, stable at temperatures from -70 F. to +400 F.

DOW CORNING 4 COMPOUND

MEETS ALL REQUIREMENTS OF AN-C-128a

More water repellent than paraffin, Dow Corning 4 Compound is highly resistant to oxygen, ozone and to deterioration caused by corona discharge.

POWER FACTOR up to 10 megacycles...0.001
VOLUME RESISTIVITY ohm centimeters.... 10^{15}
DIELECTRIC STRENGTH volts/mil..... 500

for switches and contacts in the POWER INDUSTRY

for ELECTRONIC EQUIPMENT

Write Today!
for your copy of our new booklet on Dow Corning 4 Compound. Address Dept. J

Dow Corning
FIRST ... IN ... SILICONES

DOW CORNING CORPORATION, Midland, Michigan



MORE THAN 70 DIFFERENT TYPES & SIZES

MINIATURE BALL BEARINGS for application in precision mechanisms minimize friction and wear. High load capacity. Least weight and space. Special designs and complete engineering service for your application. Write for catalog E.

MPB MINIATURE Precision BEARINGS
INCORPORATED
KEENE, NEW HAMPSHIRE, U.S.A.

EL-TRONICS, INC.
Research, development, and manufacture of electronic equipment—a single model to large quantities.
Write Today for Free Resume of Our Plant Facilities
Specialists in Geiger-Muller equipment
2647-67 N. Howard St.-Phila. 33, Pa.-GArfield 5-2026

FINE RIBBONS OF TUNGSTEN and Molybdenum
Quality and accuracy in our fabrication of Tungsten & Molybdenum Ribbons have characterized our service to the Electronic industry.
A development of
H. CROSS Co.
15 Beekman St., New York 7, N. Y.

SUB-CONTRACTING
MILITARY and COMMERCIAL
receivers — test equipment
transmitters — controls
sub-assemblies
TELETRONICS LABORATORY, INC.
Westbury, L. I., N. Y., Westbury 7-1028

ALLEN FLUXES
SOLDERING
BRAZING & WELDING
L. B. ALLEN CO. INC. Chicago 31, Ill.
6751 Bryn Mawr Ave.

high speed high sensitivity
SHORTED TURN INDICATOR
The Kartron Shorted Turn and Open Circuit Coil Checker — Model 101B — indicates single shorted turns of #44 wire in unmounted coils.
Standard mandrel 3/16 x 1/4 for all average size coils. Regulated vacuum tube circuit. Jack for audio indication to supplement 1-ma. meter.
Prompt deliveries. Price $150.
KARTRON Huntington Beach, Calif.

When you're in need of some product or service to speed and improve operation, or save money, you may find it here—in the Contacts Section. . . . *each issue.*

A EUROPEAN SOURCE OF SUPPLY *INVITES YOUR ENQUIRIES FOR*
TELEVISION & RADIO PARTS
FLUORESCENT LAMPS & ACCESSORIES
Societe Industrielle ALFA
80, rue de la Senne, Bruxelle-Belgium
Cables: RALFA-BRUSSELS
Manufacturers and Exporters of World-Wide Reputation

EISLER Manufactures Complete Equipment for:
SPOT WELDERS, Electric, for ¼ to 250 KVA
TELEVISION TUBE GLASS WORKING EQUIPMENT
TRANSFORMERS, Special and Standard Types
INCANDESCENT LAMP Manufacturing Equipment
FLUORESCENT TUBE Manufacturing Equipment
NEON SIGN MAKERS EQUIPMENT
ELECTRONIC EQUIPMENT, Vacuum Pumps, etc.
WET GLASS SLICING and Cutting machines for Laboratory use
EISLER ENGINEERING CO. INC. 751 SO. 13th ST. Newark 3, N. J.

choice of one ampere in the center, or presumably one-half ampere in series with each plate be correct?

The answer to this problem will appear in next month's *Backtalk* along with a new problem. Readers are encouraged to submit puzzle problems. A payment of five dollars will be paid for each acceptable entry (with solution).

Last Month's Solution

Last month's problem was:

What is the input impedance and the frequency for which the following circuit



has unity power factor (anti-resonance)?

Solution. The input impedance Z_{IN} is 1,000 ohms, and the anti-resonant frequency is indeterminate—that is, the circuit is resonant for all frequencies. The susceptance of the L branch is

$$\frac{\omega\, 10^{-6}}{10^6 + \omega^2\, 10^{-6}}$$

The susceptance of the C branch is

$$\frac{\frac{1}{\omega\, 10^{-6}}}{10^6 + \frac{1}{\omega^2\, 10^{-12}}}$$

For unity power factor these two equations are equal

$$\frac{\omega 10^{-6}}{10^6 + \omega^2\, 10^{-6}} = \frac{\frac{1}{\omega\, 10^{-6}}}{10^6 + \frac{1}{\omega^2\, 10^{-12}}}$$

$$\omega 10^6 + \frac{10^{18}}{\omega} = \frac{10^{18}}{\omega} + \omega\, 10^6$$

which is an identity satisfied for all values of ω.

The input impedance Z_{IN} is equal to the reciprocal of the sum of the conductances

$$\frac{1}{Z_{IN}} = \frac{10^6}{10^6 + \omega^2\, 10^{-6}} + \frac{10^6}{10^6 + \frac{1}{\omega^2\, 10^{-12}}}$$

$$= 10^{-6}\left[\frac{1}{1 + \omega^{-2}\, 10^{-12}} + \frac{\omega^2\, 10^{-12}}{\omega^2\, 10^{-12} + 1}\right] = 10^{-6}$$

Thus $Z_{IN} = 1{,}000$ ohms.

PROFESSIONAL SERVICES

Consulting—Patents—Design—Development—Measurement

in

Radio, Audio, Industrial Electronic Appliances

AMERICAN SPEEDLIGHT CORP.
(AFFILIATED WITH J. G. SALTZMAN, INC.)
HARRY L. PARKER, PRESIDENT and CHIEF ENGINEER
Specialist in Flash and Electronic Equipment for Photography.
Consultation—Development—Design and Manufacture
480 Lexington Avenue — New York 17, N. Y.

Consult these SPECIALISTS
Let them save your time by bringing their broad experience in their specialty to bear on your problems.

PICKARD AND BURNS, INC.
Consulting Electronic Engineers
Analysis and Evaluation of Radio Systems
Research, Development & Design of Special Electronic Equipment
240 Highland Ave., — Needham 94, Mass.

CROSBY LABORATORIES, INC.
Murray G. Crosby & Staff
Radio-Electronic Engineering.
Research & Development
FM, Communications, TV
Test Equipment
Office, Laboratory & Model Shop at:
126 Hercules Rd., Mineola, N. Y.
Garden City 7-0284

PAUL GODLEY CO.
Consulting Radio Engineers
GREAT NOTCH, N. J.
Est. 1926 — Little Falls 4-1000

ALBERT PREISMAN
Consulting Engineer
Television, Pulse Techniques, Video Amplifiers, Phasing Networks, Industrial Appliances
Affiliated with
MANAGEMENT-TRAINING ASSOCIATES
3308-14th St., N.W. — Washington 10, D. C.

DUBROW DEVELOPMENT CO.
Design — Development — Mfr.
Quality Electronic Equipment
347-9 High St. — Burlington, N. J.
Burlington 3-0448

HANSON-GORRILL-BRIAN INC.
Products & Mfg. Development
ELECTRICAL - ELECTRONIC
HYDRAULIC - MECHANICAL
One Continental Hill — Glen Cove, N. Y.
Glen Cove 4-1922

SKINNER, HARLAN AND IRELAND, INC.
Consulting Engineers
Specializing in Magnetic Materials and Their Application
Office and Laboratory — Indianapolis 7, Indiana

EDGERTON, GERMESHAUSEN & GRIER, INC.
Consulting Engineers
Research Development and Manufacture of Electronic and Stroboscopic Equipment
Specialists in High-Speed Photography
160 Brookline Avenue, — Boston 15, Mass.

HOGAN LABORATORIES, INC.
John V. L. Hogan, Pres.
Applied Research, Development, Engineering
Est. 1929. Exceptionally competent staff. Electronics, Optics, Mechanisms, Facsimile Communication, Electro-sensitive recording media, Instrumentation.
158 Ferry Street, New York 14 — CHelsea 2-7855

The Robert H. Streeter Co.
Electronic Design Specialists
Engineering Consultants
Representing Manufacturers of Electronic Equipment in Southern United States
Specialists in the design and construction of specialized pieces of equipment for specific applications
Tel. 97 — Greenwood, Miss.

ELECTRONIC ENGINEERING CO. of CALIFORNIA
Radio and Electronic Consulting and Designing.
180 S. Alvarado — Los Angeles
DUnkirk 2-7363 — California

MEASUREMENTS CORPORATION
Research & Manufacturing Engineers
Harry W. Houck — Jerry B. Minter
John M. van Beuren
Specialists in the Design and Development of Electronic Test Instruments
Boonton, N. J.

THE TECHNICAL MATERIEL CORPORATION
Communications Consultants
Systems Engineering
General Offices and Laboratory
121 Spencer Place, Mamaroneck, N. Y.

ERCO RADIO LABORATORIES, INC.
Radio Communications Equipment
Engineering - Design - Development - Production
Pioneers in Frequency Shift Telegraph
Garden City • Long Island • New York

Eugene Mittelmann, E.E., Ph.D.
Consulting Engineer & Physicist
High Frequency Heating—Industrial Electronics
Applied Physics and Mathematics
549 W. Washington Blvd. — Chicago 6, Ill.
State 2-8021

WHEELER LABORATORIES, INC.
Radio and Electronics
Consulting—Research—Development
R-F Circuits—Lines—Antennas
Microwave Components—Test Equipment
Harold A. Wheeler and Engineering Staff
Great Neck, N. Y. — Great Neck 2-7896

EDWARD A. GAUGLER, Ph.D.
Consulting Physicist
Magnetic Materials and their Applications
419 Shepherd St. — Chevy Chase, Md.
Wisconsin 6196

NIAGARA ELECTRON LABORATORIES
CONSULTATION - DESIGN - CONSTRUCTION
MFG. THE THERMOCAP RELAY
Specializing in solution of problems of electronic and electro-physical instrumentation for the research or analytical laboratory. Industrial plant problems also invited.
Andover, New York Cable Address: NIATRONLAB

YARDENY LABORATORIES, INC.
Research-Design-Development
Electro-Chemical Generators of Energy
105 Chambers Street — WOrth-2-3534, 35, 36
New York 7, N. Y.

THE REAL VALUE *of placing your unusual problem in the hands of a competent consultant is that it eliminates the elements of chance and uncertainty from the problem and provides real facts upon which to base decisions.*

SEARCHLIGHT SECTION

EMPLOYMENT • BUSINESS • **OPPORTUNITIES** • EQUIPMENT—USED or RESALE

UNDISPLAYED RATE

$1.50 a line, minimum 4 lines to figure advance payment count 5 average words as a line.
INDIVIDUAL EMPLOYMENT WANTED undisplayed advertising rate is one-half of above rate, payable in advance.
PROPOSALS $1.20 a line an insertion.

INFORMATION:

BOX NUMBERS count 1 line additional in undisplayed ads.

DISCOUNT of 10% if full payment is made in advance for four consecutive insertions of undisplayed ads (not including proposals).

DISPLAYED—RATE PER INCH

The advertising rate is $12.80 per inch for all advertising appearing on other than a contract basis. Contract rates quoted on request.

AN ADVERTISING INCH is measured ⅞ inch vertically on one column, 3 columns—30 inches—to a page.

ELECT.

NEW ADVERTISEMENTS received by January 2nd will appear in the February issue, subject to limitation of space available.

The publisher cannot accept advertising in the Searchlight Section which lists the names of the manufacturers of resistors, capacitors, rheostats, and potentiometers or other names designed to describe such products.

RESEARCH OPPORTUNITIES IN THE LOS ANGELES AREA

Unusual opportunity for Senior men with degrees and at least five years of outstanding proven accomplishment to achieve further growth by working with some of the nation's outstanding scientists on commercial and military projects in large, modern electronic laboratories.

ELECTRONIC ENGINEERS
PHYSICISTS-CIRCUITRY
PHYSICISTS-ANALYSIS
PHYSICISTS-OPTICS
PHYSICISTS-ELECTRON TUBES

SERVOMECHANISMS ENGINEERS
ELECTRO MECHANICAL ENGINEERS
MECHANICAL DESIGNERS

Long term program of research and development in the fields of Radar, Guided Missiles, Computers, Electron Tubes, and related equipemnt.

Please do not answer unless you meet the above requirements.

RESEARCH AND DEVELOPMENT LABORATORIES
Hughes Aircraft Company
CULVER CITY, CALIFORNIA

ENGINEERING OPPORTUNITIES *In* Westinghouse

Wanted:

DESIGN ENGINEERS
FIELD ENGINEERS
TECHNICAL WRITERS

Must have at least one year's experience.

For work on airborne radar, shipborne radar, radio communications eqpt., microwave relay, or micro-wave communications.

Good pay, excellent working conditions; advancement on individual merit; location Baltimore.

Send resume of experience and education to: Manager of Industrial Relations,

WESTINGHOUSE ELECTRIC CORP.
2519 Wilkens Ave. Baltimore 3, Maryland

ELECTRONICS MEN

ENGINEERING DIRECTOR—VICE-PRES. Production etc to $20,000
ADMINISTRATIVE ENGR — Electro-Mechanical $11,000
ASST. CHIEF ENGR—Flight Simulators $11,000
QUALITY CONTROL MGRS (1) Radio, Electronic (1) kni Metallurgy $10,000

PROJECT & DEVEL. ENGRS.

TEST EQUIPMENT, FM Transmitters, Receivers, Digital Analog Computers, VHF, UHF Circuits ..... V-HIGH
PRODUCTION MGR—Signal Equip. $8000
MFG & PROCESS ENGRS. ..... HIGH
SALES ENGRS—Electronics ..... HIGH

PURCHASING AGENTS

ELECTRONICS EXP (4) ..... $6—$12,000

ADVERTISING MANAGER

Radio or T.V. Exp. ..... $75—$12,000
Submit duplicate resumes!

FRANKLIN EMPLOYMENT SERVICE
225 S. 15th St Phila. 2, Pa.

ELECTRICAL ENGINEER

With B.S. or M.S. to work with group on circuits and miniaturization problems relating to electronic equipment and technique. Must be capable of job planning and project control. Minimum 5 years experience in both audio & TV circuits and tube component design or equipment production. Prefer engineering physicist or electrical engineer with some mechanical design experience and major interest in circuits. Position is with physics Laboratories.

Sylvania Electric Products Inc.
Bayside, Long Island
Please address replies to Personnel manager, 40-22 Lawrence St., Flushing.

PROJECT ENGINEERS

Five years or more of experience in charge of design and development of radio and communication equipment. Must be a graduate of a credited Engineering School. Well equipped laboratory in modern radio and television plant, with excellent opportunities for advancement.

Send resume of qualifications to Mr. S. F. Cascio, Personnel Director of the Hallicrafters Company
4401 West Fifth Ave., Chicago 24, Illinois

Engineers - Executives - Technical Men

Salaried Positions, $4,000 to $30,000. This Confidential service for men who desire a new connection, will develop and conduct preliminary negotiations without risk to present position. Send name and address for details.

TOMSETT ASSOCIATES
1207-2 Berger Bldg., Pittsburgh 19, Pa.

ELECTRONIC ENGINEER

At least three (3) years post-college experience in development, DC amplifier, digital computers, pulse and servo design. Established Company, New York City.

P-8236, Electronics
330 W. 42 St., New York 18, N. Y.

REPLIES (Box No.): Address to office nearest you
NEW YORK: 330 W. 42nd St. (18)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)

POSITIONS VACANT

EXPANDING SOUTHWEST organization has need for electronic engineers and technicians, mechanical engineers, machinists, draftsmen, mechanical and electronic; to work with cinetheodolites, cameras, radars, computers and telemeters, *as used for* guided missile test instrumentation. Work consists of operation, maintenance, development and construction. Write for application form. Salary offers based on application and personal interview are commensurate with education, training, experience, job responsibility and other factors. Particularly needed; engineers and technicians experienced in small quantity production to JAN specifications. Address reply to: C. E. Riggs, Land-Air, Inc. Box 76, Holloman Air Force Base, New Mexico.

ELECTRONIC ENGINEERS for sales, design and application engineering. Positions open in Sales and Engineering Depts. of manufacturer of communication equipment. Salary commensurate with experience. Location Chicago. P-8368, Electronics.

ELECTRONIC ENGINEERS: We have openings for men with B.S.E.E., minimum several years' experience in area of design, construction, operation of microwave equipment; knowledge of radar or communications desirable; capable of reviewing complex Microwave systems, able to prepare production specifications for electronic equipment, determine components and propose recommendations for improvement. Salary commensurate with experience. Washington, D. C. area. P-8238, Electronics.

SELLING OPPORTUNITY OFFERED

SALESMAN TO promote sales of high quality industrial wire wound resistors, Vitreous Enameled, standard or custom types, now being produced by a well organized Corporation. Give summary of experience and availability in reply. SW-8278, Electronics.

EMPLOYMENT SERVICES

SALARIED PERSONNEL, $3,000-$25,000. This confidential service, established 1927, is geared to needs of high grade men who seek a change of connection under conditions assuring, if employed, full protection to present position. Send name and address only for details. Personal consultation invited. Jira Thayer Jennings, Dept. L, 241 Orange St., New Haven, Conn.

SELLING OPPORTUNITIES WANTED

SALES REPRESENTATIVE seeks additional industrial line. E.E., 15 years' experience electrical product sales in New York, New Jersey, Southern New England. RA-8427, Electronics.

REPRESENTATIVE LONG Island, New York, has one million population. Requires resident coverage by experienced men to jobbers and dealers. Electrical supplies only. RA-8277, Electronics.

BUSINESS OPPORTUNITY

If you are contemplating relocating, you should request a copy of "Business Opportunities in Watertown, South Dakota." Call or write Mayor Gilbert or the City Promotional Director, J. G. Ihnet.

POSITIONS OPEN IN RESEARCH *and* ADVANCED DEVELOPMENT PROGRAMS

to

Research Physicists
Senior Electronic Engineers
Senior Mechanical Engineers
Engineering Physicists
Circuit Engineers
Microwave Engineers
Vacuum Tube Research Engineers
Technical Report Writers
Electronic Technicians

Experienced or Holding Advanced Degrees For Research, Design, or Development In

Radar, Servomechanisms, Computers, Receivers, Photo Emission, Secondary Emission, Converters, Pulse and Timing Techniques, Special Test Equipment, Special Purpose Tubes, Circuit Design, Solid State Physics, Light and Electron Optics, etc.

We invite interested personnel with experience in the above fields to submit a complete and detailed resume of education and experience, together with salary rquirements and availability date, to:

The Employment Department

CAPEHART-FARNSWORTH CORPORATION

FORT WAYNE 1, INDIANA

RESEARCH - DEVELOPMENT - DESIGN

ENGINEERING WITH A FUTURE

The steady growth of several established research and development projects has created a number of exceptional engineering opportunities with a future.

PHYSICISTS—ENGINEERS

Positions are now available in our organization for qualified physicists and engineers with backgrounds in circuit analysis, microwaves, servomechanisms, analog computers, etc. Openings exist at several levels with salaries dependent on education, ability, and experience.

If you are qualified and interested in a position which combines stability and unusual opportunity, write, giving full details to Mr. C. G. Jones, Manager, Salary Personnel.

GOODYEAR
AIRCRAFT CORPORATION

Akron 15, Ohio

ELECTRONIC ENGINEERS AND PHYSICISTS

Senior staff positions are available for electronic engineers and physicists with experience in the following fields:

Radiation Instrumentation
Computers
Radar Systems
Microwave Components
Servomechanisms
Telemetering
Nuclear Physics
Automatic Controls

If interested in working in a research laboratory separated from immediate production operations, send resume.

Bendix Aviation Corporation Research Laboratories
4855 Fourth Avenue, Detroit 1, Michigan

SENIOR ELECTRONIC CIRCUIT PHYSICISTS

for

Advanced Research and Development

MINIMUM REQUIREMENTS:

1. M.S. or Ph.D. in Physics or E.E.
2. Not less than five years experience in advanced electronic circuit development with a record of accomplishment giving evidence of an unusual degree of ingenuity and ability in the field.
3. Minimum age 28 years.

Hughes Aircraft Company
Attention: Mr. Jack Harwood
CULVER CITY, CALIFORNIA

The W. L. MAXSON CORPORATION

IS SEEKING

Outstanding

ENGINEERS

AND

PHYSICISTS

with AMBITION to

FURTHER PRESENT STANDING

Immediately

Minimum Requirements are:

1. Five to ten years experience in advanced electronic research and development.
2. Outstanding record of ingenuity.
3. Ph.D., M.S. or equivalent.

Please send resume and salary requirements to:

The W. L. MAXSON CORPORATION
460 W. 34th St.
New York 1, N. Y.

Electronic Engineers

BENDIX RADIO DIVISION
Bendix Aviation Corporation

PRODUCTION DESIGN **RESEARCH**

Openings for experienced engineers or recent graduates who are seeking a permanent position in a modern, well-equipped electronics organization working with a specialized and highly technical professional group.

Positions available for work on: Search and Airport Surveillance Radar; G.C.A.; Communication and Navigation Equipment; Broadcast and Television; Mobile Equipment; Test Equipment.

Housing and rentals in area are plentiful

Send resume to:

MR. W. L. WEBB, *Director*
Engineering and Research

BENDIX RADIO DIVISION
Baltimore 4, Maryland

RESEARCH ENGINEERS ELECTRICAL ENGINEERS AND PHYSICISTS

THE FRANKLIN INSTITUTE

Laboratories for Research and Development

have openings for personnel with 2-10 years experience. Advanced degrees are desirable in certain of the positions. Fields of interest covered are: Mathematical Analysis of Physical Problems, Statistical Theory of Communications, Electromagnetic Theory, Circuit Analysis, Servomechanism Theory, Electrical Computing, Advanced and Fundamental Circuit Development, Radar and Pulse Circuits, Supervision of Operation of G.C.A. or Tracking Radar, Air Traffic Control Air Navigation, Automatic Controls, Industrial or Marine Power Drives, and Electrical Machinery.

Send resume of education and experience, salary requirements and photograph to:

Personnel Department

THE FRANKLIN INSTITUTE
Philadelphia 3, Pennsylvania

TOP TELEVISION COMMUNICATIONS AND RADIO MFR.

NEEDS HELP

TO MEET OUR

EXPANDING CIVILIAN BUSINESS

AND INCREASING

MILITARY CONTRACTS

Good Opportunity for

ELECTRICAL & MECHANICAL EXP. ENGINEERS LAB. TECHNICIANS & DRAFTSMEN

TO IMPROVE THEIR STATUS, JOB SECURITY, & WORKING CONDITIONS.

APPLY BY LETTER ONLY

STATING EXPERIENCE, SCHOOLING, AGE, SALARY, AND REASON FOR CHANGE.

OUR EMPLOYEES KNOW ABOUT THIS ADVERTISEMENT.

CHICAGO LOCATION

P-8344, Electronics
520 N. Michigan Ave., Chicago 11, Ill.

ELECTRONIC ENGINEERS

SENIOR ENGINEERS or PHYSICISTS
Degree and experience in Radar, Pulse Circuits, Digital or Analogue Computers, or Servomechanisms
JUNIOR ENGINEERS and recent graduate in EE or Physics.

ELECTRONIC ENGINEERING COMPANY
OF CALIFORNIA
180 S. Alvarado St. Los Angeles 4, Calif.

SEMI CONDUCTOR RESEARCH

Physicists, chemists or EE's with PhD or equivalent and experience in the field of solid state physics for research work on semi-conductor devices employing germanium and silicon. An excellent opportunity in a research laboratory of a leading manufacturer with laboratories in New York State. Send complete resume. Our employees have been notified.

P-8023, Electronics
330 W. 42 St., New York 18, N. Y.

TELEVISION ENGINEER

For design and development of Television and Radio Receivers by one of Chicago's oldest Television and Radio manufacturers. Applicant required to have college degree or equivalent. Experience necessary in design and measuring techniques. Give age, experience, reference, etc. Salary open.

P-8256, Electronics
520 N. Michigan Ave., Chicago 11, Ill.

ELECTRICAL ENGINEER

Graduate electrical engineer with a minimum of 2 years' experience. For design and development of audio transformers and filters. Permanent position with progressive firm located in Chicago. Give details stating age, education, experience, references, availability for work and salary expected.

P-7849, Electronics
330 W. 42nd St., New York 18, N. Y.

ENGINEERS
For Cathode Ray Tubes

Glass Technologists
Established Company in Midwest

P-8250, Electronics
520 N. Michigan Ave., Chicago 11, Ill.

RADAR, COMMUNICATIONS *and* SONAR TECHNICIANS WANTED

For Overseas Assignments

Technical Qualifications:

1. At least 3 years' practical experience in installation and maintenance.
2. Navy veterans ETM 1/c or higher.
3. Army veterans TECH/SGT or higher.

Personal Qualifications:

1. Age, over 22—must pass physical examination.
2. Ability to assume responsibility.
3. Must stand thorough character investigation.
4. Willing to go overseas for 1 year.

Base pay, bonus, living allowance, vacation add up to $7,000.00 per year. Permanent connection with company possible.

Apply by Writing to

A-1, P. O. Box 3414
Philadelphia 22, Pa.

Men qualified in RADAR, COMMUNICATIONS or SONAR give complete history. Interview will be arranged for successful applicants.

NATIONAL UNION RESEARCH DIVISION

Senior engineers and physicists are needed for research and development of Cathode Ray, Subminiature, Secondary Emission, and highly specialized types of Vacuum Tubes.

Junior Electrical Engineers are desired for training as tube or circuit design engineers.

Men qualified by virtue of education or experience to handle problems in the field of tube or circuit design are invited to send their resumes to:

Divisional Personnel Manager

NATIONAL UNION RESEARCH DIVISION
350 Scotland Rd. Orange, N. J.

ELECTRONICS ENGINEERS FOR SOUTHWEST ATOMIC ENERGY INSTALLATION

2 to 10 years experience in research, design, development, or test

A variety of positions open for men with Bachelor's or advanced degrees qualified in one or more of the following fields:

- UHF TECHNIQUES
- PULSE CIRCUITS
- SERVO-MECHANISMS
- TELEMETERING
- RELAYS
- LOW POWER APPLICATION
- INSTRUMENTATION
- STATISTICAL ANALYSIS
- TEST EQUIPMENT RELATING TO ABOVE FIELDS

Patent History Desirable But Not Necessary

These openings are for permanent positions at the Sandia Laboratory in Albuquerque, New Mexico. Albuquerque is the largest city in New Mexico, a mile above sea level, with a sunny, warm, dry climate, and a population of 100,000. Located in the Rio Grande Valley at the foot of the Sandia Mountains, which rise to 11,000 ft., Sandia Laboratory is operated by Sandia Corporation, a subsidiary of the Western Electric Company, under contract with the Atomic Energy Commission. This laboratory offers pleasant working conditions and liberal employee benefit plans.

MAKE APPLICATION TO:

PROFESSIONAL EMPLOYMENT DIVISION
SANDIA CORPORATION SANDIA BASE
ALBUQUERQUE, NEW MEXICO

SENIOR MECHANICAL ENGINEER

Established West Coast electronic manufacturing concern seeks a mechanical engineer with the following qualifications:

10 years experience. Familiar with inspection methods and procedures employed in electronic manufacturing. Mechanical design experience requiring ingenuity and ability. Supervisory experience desirable.

P-8280, Electronics
68 Post St., San Francisco 4, Calif.

ELECTRONICS Sales Engineers

Positions open for sales engineers having practical experience in application of radio frequency heating. A good knowledge of electronics and of mechanisms, such as are used in quantity production lines, is a requirement. The work involves application engineering and sales of induction and dielectric heating generators and associated work handling apparatus. Locations in Detroit, Boston, Buffalo and Richmond, Virginia. For application write:

Manager, Technical Employment
Westinghouse Electric Corporation
306 Fourth Avenue
Pittsburgh 30, Pennsylvania

RESEARCH AND DEVELOPMENT ENGINEERS

MECHANICAL, ELECTRICAL, and ELECTRONIC ENGINEERS and ENGINEERING PHYSICISTS

Excellent positions on experimental research and development projects related to intricate electro-mechanical and electronic devices.

Men with advanced degrees or equivalent experience may qualify for permanent positions in our laboratories in New York State.

Give full details of education and experience indicating age and marital status.

P-7894, Electronics
330 W. 42 St., New York 18, N. Y.

Development Engineer
Project Engineer
Mechanical Engineer

We have openings for the following graduate engineers to assist in the development and design of precision test instruments.

Senior development engineer preferably with a masters degree or equivalent training and five to eight years of industrial experience.

Senior project engineer with five to eight years of industrial experience.

Mechanical engineer with five to seven years of product design experience preferably in the electronics industry.

These are permanent positions with a progressive organization offering stimulating work, congenial associates, pleasant surroundings and advanced personnel policies.

Submit resume of education and experience to:

Boonton Radio Corporation
Boonton, New Jersey

ATOMIC POWER

Westinghouse Electric Corporation

Immediate Openings

For Experienced
Senior and Junior Engineers

- Circuit designers, sequence control and regulating systems.
- Designer of amplifiers for indication, detection and control functions.
- Designer for servosystems in the instrument range.

For application write—

Manager,
Technical Employment,
306 FOURTH AVE.
PITTSBURGH 30, PA.

WANTED

WANTED
Used glass working machinery and equipment for lamp manufacture
HAYDU BROTHERS
Plainfield, N. J.

ATTENTION MANUFACTURERS

We'll pay top price for your surplus new corrugated cartons. Don't let them deteriorate. Cash in now. No quantity too large. Send samples and advise quantities available.

E. Wertheimer & Co.
5522 W. Division Chicago 51, Ill.
Phone Estebrook 8-8532
References: Your Own Bank, Dun & Bradstreet

WANTED
WESTERN ELECTRIC VACUUM TUBES
Types 101F, 102F, 272A, 274A or B, 310A or B, 311A, 313C, 323A, 328A, 329A, 348A, 349A, 352A, 373A, 374A, 393A, 394A, 121A Ballast Lamps.
W-6863, Electronics
330 W. 42nd St., New York 18, N. Y.

WANTED
Tubes, Test equipment, Condensers, & general inventories. Highest prices paid.
W-7965, Electronics
330 W. 42nd St., New York 18, N. Y.

New SHIPS' RADIO Equipment
Best prices and terms quoted on Bludworth Standard Arrow Direction Finders, Mackay RC123 Communication Receivers, Western Electric TRC109 Transmitter-Receivers, D.A.E. Direction Finders, Tubes, Insulators, Spares. In original cases.
Apply to: H. M. MATE
Room 1020, 70 East 45th Street, New York City
Tel: Murray Hill 6-0226

WANTED
INSULATORS: POLE LINE HARDWARE; GUY STRAND WIRE; COPPERWELD WIRE; WESTERN ELECTRIC TOOLS; SPLICING SLEEVES.
VICTOR-BERNARD INDUSTRIES
NE Cor. 22nd & Lehigh Aves., Phila. 32, Pa.

WANTED
Teletypewriters complete, components or parts. Any quantity and condition.
W-6864, Electronics
330 W. 42nd St., New York 18, N. Y.

ELECTRONIC TUBE-MAKING MACHINERY
For manufacturing radio tubes, electronic tubes, cathode-ray tubes, lamps. New and used. Reasonably priced, satisfaction guaranteed.
AMERICAN ELECTRICAL SALES CO.
67 E. 8th St. New York, N. Y.

Will Buy All
BC-348'S WITH DYNAMOTORS
Letters "J" "N" & "Q".....$60.00 ea.
All others except "C".....$50.00 ea.
Ship via Express C.O.D. subject to Inspection—TO
H. FINNEGAN
49 Washington St. Little Ferry, N. J.

WANTED
COAXIAL CABLE and CONNECTORS
W-8129, Electronics
330 W. 42 St., New York 18, N. Y.

HIGH VOLTAGE
RF POWER SUPPLIES
For INDUSTRIAL USE and PROJECTION
TELEVISION
EMBASSY ENGINEERING CO.
224 East 204 St., N.Y.C.

WANTED AT ONCE
All Types of
CARBON RESISTORS
W-8285, Electronics
330 W. 42 St., New York 18, N. Y.

WANTED
MICROWAVE TEST EQUIPMENT
Including plumbing, pulse transformers, thermisters, bolometers, cavities, test equipment, etc. Highest prices paid. Address
W-8442, Electronics
330 W. 42 St., New York 18, N. Y.

WHOLESALE ONLY
ELECTRONIC COMPONENTS
AIRCRAFT EQUIPMENT
HYDRAULICS
RADIO & ELECTRONIC SURPLUS
13933-9 Brush St. Detroit 3, Mich.
Phone Townsend 9-3403

We are empowered to buy for the manufacturers and pay highest prices for
RESISTORS TUBES CONDENSERS
Volume controls and other electronic components.
We need everything. Send us your complete lists.
ELECTRONIC SURPLUS BROKERS
3232 Broadway Riverside 9-4955 New York, N. Y.

MICROWAVE

MAGNETRON MAGNETS

Gauss	Pole Diam.	Spacing	Price
4850	⅝ in.	⅞ in.	$12.50
8200	11/32 in.	¾ in.	$17.50
1300	1⅝ in.	1 5/16 in.	$12.50
1800	1⅝ in.	1½ in.	$14.50

Electromagnets for magnetrons.....$24.50 ea.

GE Magnets type M7765115, GI Distance Between pole faces variable. 2 1/16" (1900 Gauss) to 1¼" (2200 Gauss) Pole Dia. 1 ½" New Part of SCR 584 .....$34.50

MAGNETRONS

QK 61	2J32	2J61	720CY
QK 69	2J37	2J62	725-A
	2J21	2J36	3J31	730-A
	2J29	5J30	723
QK 915	2J26	2J40	714AY	706
QK 62	2J27	2J49	718DY	700
QK 59	2J31	2J34	720BY	

Klystrons 723A, 707B, 417A, 2K41

THERMISTORS

D-167332 (tube)	$ .95
D-170386 (bead)	.95
D-167615 (button)	.95
D-164699 for MT6 in "X" Band Guide	$2.50
D-167018 (tube)	.95

VARISTORS

D-170225	$1.25
D-167179	.95
D-167180	.95
D-171812	.95
D-171528	.95
D-171529	.95
D-168442	$3.00
D-165593	$1.25
D-88338	$2.00
D-161871A	$2.85
D-171121	.95
D-98836	$1.50
D-162356 (388A)	
D-163357	$2.00
D-99946	$2.90

RADAR SYSTEMS AND COMPONENTS IN STOCK

APS-2
10 CM Airborne
APS-3
3 CM Airborne
APS-4
3 CM Airborne
APS-6
3 CM Airborne
APS-6A
3 CM Airborne
APS-10
3 CM Airborne
APQ-13
3 CM Airborne
APS-15
3 CM Airborne
APS-31
3 CM Airborne
CPN-8
10 CM
Ground Beacon
CEXH
10 CM
Ground Beacon
FD-MARK 4
800 MC
Ship Gunlaying
MARK 10
10 CM
Ship Gunlaying
SA
200 MC
Ship Air Search
SC
200 MC
Ship Air Search
SD
200 MC
Submarine
SE
10 CM
Surface Search
SF
10 CM
Surface Search
SG
10 CM
Surface Search
SJ
10 CM
Submarine
SK
200 MC
Air Search
SL
10 CM
Surface Search
SN
10 CM Portable
SO (All Series)
10 CM
Surface Search
SQ
10 CM Portable
SW
200 MC Portable
SCR 518
400 MC
Altimeter
SCR 520
10 CM Airborne
SCR 533
200 MC
Airsearch
SCR 545
10 CM Tracking
800 MC Search
SCR 663
Searchlight
Track

SONAR SYSTEMS AND COMPONENTS IN STOCK

QBF
QBG
QC
QCJ
QCL
QCO
QCS
QCU
WEA

23,000 to 27,000 Mc BENCH TEST PLUMBING
½" to ¼" Waveguide

Precision Slotted Line. Adjustable probe $266.00
Directional Coupler-Wavemeter Mnt. 12DB $90.00
Precision Var Attenuator, mfg. Bernard Rice $90.00
Low Power Lead $20.00
Shunt Tee $35.00
Waveguide Lengths, 2" to 6" long, gold plated with circular flanges and coupling nuts .....$2.25 per inch
APS-34 Rotating Joint.....$49.50
Right Angle Bend E or H Plane, specify combination of couplings desired $12.00
45° Bend E or H Plane, Choke to cover $12.00
Directional coupler CU-108/APH23 .....$49.50
Mitered Elbow, cover to cover...$4.00
TR-ATR-Section, Choke to cover $4.00
Flexible Section 1" choke to choke $3.00
"S" Curve Choke to cover.....$4.50
Adapter, round to square cover $5.00
Feedback to Parabola Horn with pressurized window $27.50
Low Power Lead, less cards...$18.50
K Band Mixer Block.....$45.00
Waveguide ½ to ¼".....$1.00 per ft.
90° Twist $10.00
"K" Band Directional Coupler CU164 /APH-34 20 DB.....$49.50 ea.
3J31 Magnetrons $35.00

6000 Mc to 8500 Mc BENCH TEST PLUMBING
1½" x ¾" Waveguide

Klystron Mount. DB356 complete with shield and tunable termination $125.00
Flap Attenuator. DB361.....$45.00
Variable Stub Tuner $90.00
Wvgd. to Type "N" Adapter.....$16.50
Wavemeter Tee. DB353.....$32.50
Magic Tee $80.00
Directional Coupler, two hole 25DB coupling, type "N" output.....$28.00
Precision Crystal Mount. Equipped with tuning slugs and tunable termination $125.00
Tunable Termination. Precision adjust $70.00
Low Power Lead.....$35.00

4000 to 6000 Mcs BENCH TEST PLUMBING
2" x 1" Waveguide

Flap Attenuator $48.00
Variable Stub Tuner and Low Power Termination $48.00
Wavemeter Tee $48.00
Adapters: Choke to choke.....$18.00
Cover to cover.....$16.00
Choke to cover.....$16.00
Waveguide to Type "N" Adapter $45.00
Directional Coupler. Two hole type, type "N" output $48.00
Klystron Mount. Equipped with tunable termination and micrometer adjust. Klystron antenna tuning $110.00
Crystal Mount. Equipped with tunable termination and micrometer adjust. Crystal tuning.....$125.00
Tunable Termination. Precision adjust $90.00

ARMY-NAVY TEST SETS

LU-1 FREQ. Meter and Test Oscillator. Type CRV-60ACL.
TVN-9HU POWER SUPPLY, MIT Rad. Lab.
TVN-8SE KLYSTRON POWER SUPPLY, MIT, Rad. Lab.
C860ABW WATT METER — Waveguide, 3 CM.
APR5 RECEIVER—1000 to 6000 mcs.
AN/CPN-8—10 centimeter 40 kw output RF package. Includes magnetron oscillator, complete modulator, complete receiver, complete signal and power analyser with 5" scope. 115V AC input.
Dehydrator Unit CPD 10137 Automatic cycling. Compressor to 50 lbs. Compl. for Radar XSMN.
New $425.00
SC-3 Receiver, 30 mc. IF. 6 stages 6AC7, 10 MC. Band width input 5.1 mc B.W. per stg. 9.6 volt gain per stage as desc. in ch. 13 vol. 23, M.I.T. Rad. Lab. Series.....$99.50

TS12 3CM Slotted Line
TS13 3CM Signal Generator
TS33 3CM Frequency Meter
TS35 3CM Signal Generator
TS36 3CM Power Meter
TS45/APM3 3CM Signal Generator
TS62 3CM Echo Box
TS108 Dummy Load
1-165A Oscillator
1-158 Range Calibrator
1-233—Range Calibrator
RC 1538 Freq. Meter
RF Preamps.
G.R. Capacity Brdg #216
G.R. Uni Galvo Shunt #2229
G.R. 1000 Aud. Osc. #2213
TS 226A/AP Pwr. Mtr. 0-1000W.
Sig Gen #804 8-330 MC
RC 221 Freq. Meter
TS 10A/AP
TS 69/AP Freq. Meter
1-114 Test Set
1-126
Field Int. Meter 43A
Sig. Gen. Mod. 78B
Megometer 0-5 Meg Ω
TS 1-49 Bridge
1-166 Volt Ohmmeter
Sig Gen 0.5-500 MC
CV 81/AP
TS 59/APN1
CW 60/ABM
Freq Meter BC 438

GENERAL TEST EQUIPMENT

Multi Frequency Generator. American Time Product type SC-16. Frequency 10 to 190. Precision Standard "Watch-Master".
UHF Signal Generator. R.C.A. type 710A. 270 to 560 mcs.
Wheatstone Bridge. Industrial Inst. type RN-1.
FM Signal Generator. Boonton Radio type 155A. Freq. range 1 to 10 mcs., 88 to 50 mcs.
Condenser Weld Power. Cap. 56 mfd. max., max. chg. 1500 Volts.
Frequency Meter. Lavole Model 105-300 to 600 mcs.
Megohm Bridge. Industrial Instruments type MB.
Visual Alignment—Signal Generator. General Electric—0 to 60 mcs.

THE MUST OF THE MONTH

Complete 3 CM Radar System equipment 40 KW peak transmitter, pulse modulator, receiver, using 725AB, power supply operating from 115V 800 Cycle, antenna system. Complete radar set neatly packaged in less than 16 cubic feet, all tubes, in used but excellent condition—$350.00. This price for laboratories, schools, and experimental purposes only.

MICROWAVE ANTENNAS

RELAY SYSTEM PARABOLIC REFLECTORS: approx. range: 2000 to 6000 mc. Dimensions: 6' x 3' rectangle, now $35.00
TDY "JAM" RADAR ROTATING ANTENNA. 10 cm. 30 dg. beam. 115 v.a.c. drive. New.....$160.00
SO-13 ANTENNA 24" dish with feed-back dipole. 360 deg. rotation. Complete with drive motor and selsyn. New $128.00
Used $45.00
DBM ANTENNA. Dual, back-to-back paraboias with dipole. Freq. coverage 1,000-4,500 mc. No drive mechanism $65.00
AS125/APR Cone type receiving antenna. 1080 to 3208 megacycles. New $75.00
140-600 MC. CONE type antenna, complete with 25' sectional steel mast, guys, cables, carrying case, etc. New $49.50
ASD 3 cm. antenna, used, ex. cond $49.50
YAGI ANTENNA AS-46A. APS-4. 5 elements .....$14.50 ea.
Dish for Parabola 30".....$4.85
AN 122 .....$22.50
RC 224 .....$99.50
AS 17/APS.
DAK Directional Finder Loops
Adcock Arrays
SA-1 Radar
200 MC. Bed Spring
LP21-A Airborne Dir. Find. Loop, w/ Selsyn & Loop Housing
APS 4 Ant.
AN 128A 200 MC. Array
Write for info and Price

PULSE TRANSFORMERS

G.E.K.-2745 .....$39.50
G.E.K.-2744-A. 11.5 KV High Voltage. 2.8 KV Low Voltage @ 200 KW oper. (270 KW max.) 1 microsec. or ¼ microsec. @ 800 PPS $39.50
W.E. #166173 Hi-Volt Input transformer, W.E. impedance ratio 50 ohms to 900 ohms, ranges 10 kc to 2 mc 2 sections parallel connected pottted in oil.....$36.00
W.E. KS 3800 Input transformer. Winding ratio between terminals 3-5 and 1-2 is 1.1:1, and between terminals 6-7 and 1-3 is 2:1. Frequency range: 240-530 c.p.s. Permalloy core 6.00
G.E. #K2731 Repetition Rate: 635 PPS. Pri. Imp: 50 Ohms Sec. Imp. 450 Ohms, Pulse Width: 1 Microsec. Pri. Input: 9.5 KV PK. Sec. Output: 28 KV-PK. Peak Output: 800 KW Rifar 2.75 Amp....$44.50
W.E. #D169271 Hi Volt Input pulse Transformer $27.50
G.E. K2458A. With receive 13KV. 4 micro-second pulse on pri. secondary delivers 14KV. Peak power out 100KW $34.50
G.E. #K2748A. Pulse Input, line to magnetron $36.00
#2963 Trans. Pulse and Blocking Oscillator XFMR Freq. limits 790-810 cy-3 winding turns ratio 1:1:1 Dimensions 13/16 x 1¼ x 19/32 $1.50
Pulse 151 AWP $8.00
Pulse 124-BW-2F L-440695.....$2.25
RAY—WX4298F $39.50
RAY—K6824730 .....$50.00
G.E.—K9316945 .....$80.00
#7766489—9333 .....
A 7766490— .....
UX-7350— $6.95
#—9350 (218981) $2.00
#352-7181 .....
AVAIL. in Stock #318 #290—Write.

8500 Mc to 9600 Mc BENCH TEST PLUMBING
1" x ½" Waveguide

Variable Stub Tuner. DB534. 180 degree phase shifting capacity $70.00
Low Power Termination. DB381 .....$18.50
Uni-Directional Coupler. DB390. 23 DB type "N" output.....$18.50
Pick Up Horn, Type "N" output $4.50
Wavemeter. 8500 to 9400 mcs., with calibration. Micrometer adjust head. Reaction type $85.00
Waveguide Length. Plated and fitter with couplings available in 6", 12", 24", 36", 48" sections.....$2.00 per ft.
90 Degree Elbows. E or H plane, 2½" radius $12.50
90 Degree Twist. 6" long.....$8.50
Bulkhead Feed-Thru Assembly $15.00
Pressure Gauge Section 15 lb. gauge and press. nipple $10.50
Pressure Gauge, 15 lbs.....$2.50
Dual Oscillator-Beacon Mount. P/O APS10 Radar for mounting two 723A/B klystron with crystal mts. matching slugs, shields.....$42.50
Dual Oscillator, Mount. (Back to back) with crystal mount, tunable termination attenuating slugs. $12.50
Directional Coupler. UG-40/U Take off 20 DB.....$17.50
Directional coupler. APR-6 type "N" take off 20 DB calibrated.....$17.50
Rotary Joint Choke to Choke..$10.00
2K25/723 AB Receiver local oscillator Klystron Mount, complete with crystal mount, Iris coupling and choke coupling to TR.....$22.50
TR-ATR Duplexer section for above $8.50

1¼" x ¾" WAVEGUIDE

Tunable Termination. Precision adjust $65.00
Low Power Termination.....$25.00
Magic Tee $35.00
Oscillator Mount, for four 723AB klystron $35.50
90 Degree Elbows. E or H plane $12.50
Waveguide Lengths. Cut to size and supplied with 1 choke, 1 cover, per length .....$2.00 per ft.
Wavemeter. Absorption type. Precision micrometer adjust. Very high "Q" $150.00
Bi-Di-Coupler WG output calibrated —25 db nominal $17.50
Flex sections, 12" Rubber Coated $14.50
Mitred Elbow H Plane Us51-UG52 .....$12.00
6" St. sect. choke to choke.....$3.50
APQ 13 Constant Z Rotat Jat..$22.50

3000 Mc BENCH TEST PLUMBING

TEST EQUIPMENT

10 CM Wavemeter WE type B435490 Transmission type, Type N Fittings. Veeder Root Micrometer dial., Gold Plated W/Calib. Chart P/o Freq. Meter X6404A. New $99.50
AS14A/AP-10 CM Pick up Dipole with "N" Cablrd.....$4.50
LHTR. LIGHTHOUSE ASSEMBLY. Part of RT39 APG 5 & APG 15. Receiver and Trans Cavities w/ascc. Tr. Cavity and Type N CPLG. To Rcv. Uses 2C40, 2C45, 1B27, Tunable APX 2400-2700 MCS. Silver Plated..$49.50
Beacon Lighthouse cavity 10 cm with miniature 28 volt DC FM motor. Mfg. Bernard Rice .....$47.50 ea.
Magnetron to Waveguide Coupler with 721A Duplexer Cavity, gold plated $45.00
721A TR Box complete with tube and tuning plungers $12.50
McNally Klystron Cavities for 707B or 2K28. Three types available.....$4.00
F-2S/SPR-2 Filters, Type "N" input and output.....$12.50
WAVEGUIDE TO ¾" RIGID COAX "DOWNUNION" ADAPTER, CHOKE FLANGE, SILVER PLATED BROAD BAND $32.50
WAVEGUIDE DIRECTIONAL COUPLER, 27 db, Narr type CAHV 47AAN, with 4 in. slotted section.....$32.50
SR. FLANGE to rd choke adapter, 18 in. long OA 1⅛ in. x 3 in. guide, type "N" output and sampling probe $27.50
AN/APR5A 10 cm antenna equipment consisting of two 10 cm waveguide sections, each polarized, 45 degrees $75.00
POWER SPLITTER: 726 Klystron input dual "N" output.....$5.00

⅞" RIGID COAX

10 CM FEEDBACK DIPOLE ANTENNA, in lucite ball, for use with parabola ¾" Rigid Coax input $8.00
721A TR cavities, heavy silver plated .....$2.00 ea.
Magnetron Coupling with TR Loop $7.50
Sperry Rotating Joint, pressurized $22.50
5 Ft. Lengths Stub Supported, gold plated, less flanges $4.50
Short Right Angle Bends (for above) $2.50

SCR 454 22 FT TRAILER RADAR TRACKING & 10 CM SEARCH WRITE OR PHONE

All merch. guar. Mail orders promptly filled. All prices, F.O.B. N.Y.C. Send M.O. or Chk. Only shipping chgs. sent C.O.D. Rated concerns send P.O.

MIN. ORDER $3.00

COMMUNICATIONS EQUIPMENT CO.

MIN. ORDER $3.00

131 Liberty St., New York, N. Y. Dept. E-1 — P. J. PLISHNER — Phone: MAin 4-8373

EE89A Telephone Repeater

Used to extend range of field telephones. Simplex Teleg. and 20 cycle ringing possible over lines equipped with unit. Supplied w/ 30S tube. Phone supplied. (Featherweight) $9.49

ARC 5 MODULATOR

MD7/ARC5 w/ dynamotor complete w/ Tubes 1-1225, 2-1625, 1-UR50. Good cond. Price $8.95

MINICAPS PIGTAIL

Mfd.	Volt	Price
4	50	.10
4	100	.10
4	150	.10
4	220	.15
5	25	.10
5	50	.10
5	150	.10
8	15	.10
8	100	.15
8	150	.15
8	350	.20
10	50	.15
10	150	.20
12	450	.25
16	50	.20
16	150	.22
16	300	.30
16	450	.40
20	25	.15
20	50	.15
20	150	.18
20	250	.20
24	350	.30
25	25	.10
30	250	.25
30	450	.30
40	150	.22
40	450	.40
50	25	.22
50	50	.25
100	150	.30
100	50	.40
250	15	.50
500	8	.60
500	25	.75
1000	4	1.20
2000	6	1.35
12000	1.5	1.10

8-8	450	.60
8-16	450	.65
10-10	150	.30
10-10	450	.50
16-16	450	.70
20-20	150	.40
20-20	450	.50
40-20	450	.55
50-50	150	.40
50-50	450	.55
70-70	175	.85

Ceramic Case Mic

130MMF 10KVW	$19.00
30MMF 10KVW	19.00
.08 MFD 1500	10.00
.0045 MFD 2000	12.00
.0001 20KVW	24.00
.0051 15KVW	21.00
.001 25K	25.00

COLLINS ART-13 FREQ. MULT. UNIT

2-18 Mc for two 1625 Tubes. Comp. Assy less Tubes & Coils w/ okt dia Price.. $8.95

1619—1619—1619 Octal Base Pentog Aversatile High Pervseance

Tube, New 35¢

5 for ... 1.50



400 MA 12 HY Choke 90 ohms Herm. sealed. Special ... $3.75

Choke Swinging

9/60Hz .400/.05 Amp 10000V ins. Mfg. Super Elect. $7.95

MS49 and MS80 Fishpole Antenna, 74" long. Both for 40¢

Aircraft R e c e i v e r s 4 2 9 0 for Mobile or Aircraft covers from 200 to 1500 Kc. Intermediate change plug in tuning units includes one Tuning Unit. Less Tubes. Rec. Only a few left. $3.95 ea.

29¢ ea. 10 for $2.75 MFD. VOLT

2x 8	450	
2x10	450	
2x15	450	
2x16	450	
2x20	350	
2x20	450	
20-20	400/25	
20-20	350/25	
20-20	500	
20-10	350/300	
24-24	400	
20-30	250	
40-40	400	
30-40	450	
40-40	475/400	
40-10	450	
40-10	450 350	
40-15	450	
40-20	150/25	
40-20	450 350	
40-35	450 350	
40-50	400 300	
50-30	150	
50-40	300 250	

12-15	220-1 20	
20-24	110-1 00	
26-30	220-1 35	
30-30	110-1 25	
43-45	110-1 25	
50-75	110-1 25	
85-85	220-1 50	
41-45	320-1 60	
64-72	110-1 25	
72-87	110-125	
75-84	110-125	
85-106	110-1 50	
107-129	110-165	
136-170	110-1 75	
134-150	70-150	
136-188	110-185	
148-185	110-185	
161-180	110-1 75	
189-210	110-1 95	
200-220	110-1 95	
270-300	110-2 10	
324-360	110-2 40	
378-420	175-3 00	
432-480	110-2 75	
485-540	110-2 85	

Trimmer Cond. Variable

15 MMF	21¢ ea.
5 MMF	
20 MMF	
40 MMF	
50 MMF	
60 MMF	

AMPHENOL "AN" CONNECTORS



LARGE VARIETY AVAILABLE AT GREAT SAVINGS

Send your specs and let us quote

TUBES

Write or Phone Your Needs

There Are No Shortages of Equipment at C.E.C.

Our warehouses are full of surplus radio, radar, electronic equipment, for your needs, as a manufacturer, jobber, amateur, experimenter, engineer, everything at surplus prices. We own what we sell, phone or write us your needs and let us quote.

Mr. Chas. Rosen
Digby 9-4124

ANTENNA MAST

Are you in a dead spot? If you can't get a good T.V. Picture here is a dig. Corp. Ant. mast 30' high of rugged plywood construction to solve your problem. It telescopes into 5 ten feet. sec. for easy stowage. Easy to him Comp. with stakes & rods. Each.... $19.95

Thermostatic Switches

SPST NO closes at 85°..60¢ ea
SPST NO opens at 85°..60¢ ea.
5 amp. contacts

MS49 and MS80 Fish Pole Antenna, 74" long, Both for 49¢

METERS

0.5MA SQ 2" Metal Case or 0-10 volt movement rewhite meter .... 98¢

6V Input Dynamotor

Output 150V/75MA or 12V Input, 300V/30 MA Out. $3.49

FEED THRU

2¼" L x 1¼" W Type XSI 10c ea. 10 For 80c

AUDIO TRANSFORMERS

ITEM		
AT666	Input 6 ohms: 250K ohms	.79¢
AT SUB	Multimatch Subouncer 200 ohms 125K ohms C. T.: 100K ohms/20K ohms	.49¢
AT070	Input to Grid 250 ohms: 60K ohms Hi Fi	1.19
AT666	Input to Grid, 50/200 ohms 50K ohms	.98
AT227	Output to line, 7500K 800 ohm CT 200-5&6?	1.45
AT353	Output PP 6L6 to 300/20/12/16 ohms 25 Watt	2.95
AT371	UNIV. Output, Hi Fi. Pri 20K ohms Sec. 15/7.5/5/3.75/1.25/500 ohms	2.79
AT554	Interstage, 10K ohms: 250K ohms 150b Level	1.95
AT765	Input 600 ohms to 80K ohms	.79
AT707	Interstage ouput 10K ohms: 125K, 125K ohms	.79
AT780	Input Pri: 15/15 ohm Sec: 180K ohm	.89
AT449	Driver 3A ohm to 4K ohm PP6L6 to PP805 Class B	3.89
AT21	Dual XFRMR 300 ohms: 300 ohms and 600 ohms: 250K ohms	1.25

CONDENSER TUNING UNITS FOR BC 191

Write up in CCT QST for Conv to vhf freq meter

TU 5—	1500 to 3000	KC
TU 6—	3000 to 4500	KC
TU 7—	4500 to 6200	KC
TU 8—	6200 to 7700	KC
TU 9—	7700 to 10000	KC
TU 26—	200 to 500	KC

Price $2.49 ea.

0-30V DC Meter Westing. Type AX Aircraft type. Price $2.49

CERAMIC TRIMMER

Stock of 6 Ceramic Trimmers Mmf. Can be used singly or ganged ..... 110-480 69¢

VFO CAPACITOR

High Grade Unit. Consists of 3 Gang Capacitor 20 mmf per sect. Ceramic ins. Low drift w/Worm Gear (reduction) 120:1 w/ext Shaft and Veeder 4 digit Counter $3.89

TYPE 18 TELEPHONE RELAYS

	Price
D171258 4850 ohms DPDT SPST (NO)	$.98
H77312-1 5220 ohms SPST (NO)	.98
G189 33 ohms coil 6VDC DPST (NO)	.98
H77312 HTD984-3 6000 ohms SPST (NO)	.98
CP Claire 14127-C12443 6500 ohms coil DPST (NO) SPST (NC)	.98
Control Corp MC2853A 6000 ohms coil 8PDT 8PST (NO)	.98
CP Claire A6941 100 ohms coil 115V 60 cy SPST (NO) SPOT POBC 3038	.98
W.E. D169614 5800 coil 110V 3 PST (NO)	.85
A101095 No Controls 390 ohms	.30
H70448-6 No Controls 90 ohms	.30
A70255-2 No Controls 400 ohms	.30
H70448-2 No Controls 400-400 2 coils	.35
MFPAUG-48 DPST 6300 ohms @ 110V LAMP	2.20
AQA (277589) SPST & SPDT 1000/2 ohms PO Sw Bd BD628	1.10
ZH7712613 DPST (NO) SPST (NC) @ 1300 ohms	1.00
GR206 DPST (NO) 500 ohms	1.00
UR1056 3PDT WE V Type 600 ohms @	1.00
D161968-29 DPST WE V Type 463 ohms	1.00
7140AE DPST WE V Type	1.00
41156 SPST (NO) 2500 ohms	1.25
GR207 (452-1085) 490 ohms 3PST (NO) SPST (NC)	1.39
GR206 (452-1084) 490 ohms DPST @ (NO)	1.39
Allen Bradley Type ED2 6V DPST @ (NO) in metal box	3.45
D161974-101 125 ohms SPDT WE V Type	1.00
D161968-1131 1700 ohms 3 PDT (NC) WE V Type	1.10
XD19459 725 ohms 3PDT (NC) 3PDT (NO) WE V Type	1.10
XD118316 725 ohms 3PDT (NC) WE V Type	1.10
XD-11974 in metal box 8PDT WE V Type	1.45
UR1116 in metal box 400 ohms 8PDT (NO) WEV Type	1.10
300 ohms 8PDT WEV Type	1.10
29367T in metal box DPDT (NO) WEV Type	1.35
(4C8827-2007) (D161968-2007) 95 ohms 8PST (NO) DPDT for Sw Bd ED8C	
Signal relay 161-A Western Union @ Plug in type in metal box plug DPST (NO) 4PDT 190 ohms	4.95

TYPE 18

694391 190 ohms SPST (NO)	1.20
D169316 1375 ohms 8PDT 8PST (NO)	1.20
D169615 5800 ohms DPST (NC) 8PDT	1.20
D151318 SPST (NC) w/micro chuck moves in & out	2.95
D169614 5100 ohms TPST (NO)	1.20
D163482 4850 ohms 8PDT	1.20
D169314 1300 ohms DPDT	1.25

DS FILTER CONDENSERS

40-20	135	10c
20	150	19c
2x30	150	29c
2x30	150	29c
40x30	150	39c
2x40	150	39c
30x50	150	39c
2x50	150	39c
3x30	150	39c
3x30	150	39c
50/2x40	25/150	39c
2x40/12	150	39c
2x40/30	150	39c
3x40	150	39c
2x50/20	150/25	39c
2x50/10	150	39c
60-30/150	150/25	39c
80-40-30/100	150/25	39c
40-30	300	49c
20-16/10	200/25	39c
2x32	250	39c
30	350	39c
2x32	350	39c
50x30	350	39c
20	450	49c
16-8	450	49c
32x16	450	59c
32x16	450	65c
2x8/25	450/75	49c
30-20/20	450/25	49c

Many Others

PE 157 VIBROPACK FOR BC 745

Runs on 2V DC. Obtained from small Willard Rechargeable battery contained in case which is charged from 6 Vac or DC. Also contains 5" PM Speaker & Jacks for Mike Hdsets. Used, excellent $9.95

Carbon Pile Voltage Regulator

★ Contract #NOAS-858 Bendix Aviation. MFRS Drawing 111144 w/mnt & gst.

★ Type A .105-115 amps 35°-45° C. Ser. 28VK 809-1L. Reg. Volt. 80 Volts. Leland Electric

Mark I. Resis. in enclosed base. Bendix Aviation.

★ A-M Ref. #5U/1304 w/rect. & resis. in base. Type E 80V AC.

★ Type C. Coil amps .80 at 25C. Output volts 19. Ser. 3711-702. Spec. VR 9000-2C. Output amps 5.7. Input volt 22-30 w/resis. Leland Electric.

These regulators are in brand new condition, priced at $2.75 each.

BATHTUB CAPACITORS

Mfd	Volt	Type	Price Ea.	Price 10 For
.5	600	2ST	$.25	$2.40
.5	600	2BT	.23	2.20
.5	600	3TT	.25	2.40
2x.1	600	3TT	.45	4.35
2x.1	600	3ST	.45	4.35
2x.1	600	3ST	.26	2.50
2x.1	600	3ST	.28	2.65
2x.1	600	3TT	.26	2.50
2x.1	600	2ST	.23	2.20
2x.1	600	2BT	.26	2.50
2x.1	600	3TT	.26	2.50
1.1-1	600	3ST	.28	2.65

Discriminator coil in Can Double Slug Tuned .465 KC ..... .79¢ ea.

IF Coil QF'R High Selectivity slug tuned 100KC L 71798 ..... .89¢

MO Coil Plugin 1800-2250KC ..... .59¢

1480—1840KC ..... .59¢

4-5.5 MC; 5.5 - 7 MC $1.10

P/o 32RA Buffer Coil Dual

P/o 32RA Mod Xfmr Screen Mod. for Pair of 807's

PP-P Push or Parallel Sidetone Wnds. ..... .95¢

VERNIER 3 GANG

Precision Assy used for single dial Control up to 75 watt. 2 single spaced 250Mmfd Sect's & Heavy Double Spaced Sect's. 50:1 Ratio Spring loaded Ceramic ins. 4 Metal Dial $3.25

SC433 Mod or unmod CW Reception 200-1750KC in 3 bands 14 or 24V & 115V AC ADF Radio Compass As Is. Less Tubes Poor Condition $10.49

BC 221 Freq. Meters. Good condition complete w/calibration book tubes xtals & spare parts $75.00 ea.

1 82A 8" 880° Compass Ind. & Selsyn Receiver New ... $4.95

BC 508A Ant. Tuning unit for BC 375 Excellent Cond. $1.50 ea.

Motor Driven Yagi Switch 24V 1800 RPM. Price English Type..... $3.95

SC434 Control Box

Remote Control for 433 Radio Compass contains O-5MA Meter. Dial control $3.95

ID6 APN4 Scope 5" Loran. Full of Resis. Micas Basic Assay for Scope. N.G. As Is. Less Tubes. $9.95

GP7 Aircraft XMTTR Fair Condition. As Is. Less T. U. $19.95

LP21 LH Radio Compass Loop. Excellent Condition. $10.95

Voltage Stabilizer VR3

95-130V 2.4A66CY 1¢ Cut. 115V 120 Watt 100% Mfg. Raytheon w/crt Bx Box. Sockets & cable used but good.

Voltage Regulator BA623

95-130V 1.76A 80CV 1¢ CU 115V 150 Watt 100%. Slightly used, excellent.

Crystals for BC 684 Complete set of 120 Xtals From 27-38.9 MC $95.00

Xtals Low & High Freq. in Ft. S41 Holders Mfg. by W. E. ½" Pin Spacing. Marked in army Mc Harmonic Freq. almost all freq's. $.89 ea.

BC 604 DM Transmitter FM 20-28 MC 11 & 15 Mtr. Can be operated on 10 Mtr. 10 Channel push button control w/ tubes meter. Less xtals. Good used Sold as it $15.95 Set of 80 xtal $25.00

Magneeyn Instrument Field Tester AAF 43G23330 Spec. 40772 To test individual mag. Ind. & Xmttrs. for isolating Faults in magneeyn systems Brand new $25.95

Photo Material Ethyl Phthalate (Last Kodi) Approx. 1 Qt Bottle $3.95 Oetonit Surface Cleaning Solution Photomat lithomat Apx. 1 Qt.... $3.95 Transparento #146 For Transparentising Drawings & Tracing Apx. 1 Qt. ...$3.95

FT234A274H Single Xmtr Rack. New..... $1.69

AMPLIFIER

AM-32/PRSI less batt w/carry case for Mine Detector AN/PRSI. Price ea. $7.95

Horsie Talkie BC745 Xmtr Revr 3-4Mc w/ITU Less Pwr Supply.. $11.95

Model 542 Supreme Sensativity, 5,000 Ohms/v 3" square meter, Reads: D.C. volts, 0-150-300-1,5000; AC Volts, 0-30-150-600; D C ma., 0.5-6-30-150; Ohms, 2,000-20,000-200,000, 2 megs; db, -8 to +50; Output, 0-30-150-600 volts. Bakelite case, 5-7/8 x 31/16 x 2-1/6" Shpg. wt. 9 lbs. $8.98 ea. Model 442 Rad City. Same as above. $8.95 ea.

Model 666—SC56J Triplet VDC 0/30/300/600/1500 VDC ohms 1000/10000 /100000/1 meg..... Price $7.95 ea. Model Same as above Chicago Price $7.95

All above meters are sold as is. No refund minor repairs required.

All merch. guar. Mail orders promptly filed. All prices F.O.B. N. Y. C. Send MO or Chk. Only shipping chgs. sent C.O.D. Rated concerns send P. O.

MIN. ORDER $3.00

COMMUNICATIONS EQUIPMENT CO.

MIN. ORDER $3.00

131 Liberty St., New York, N. Y. Dept. E-1 Chas. Rosen Phone: Digby 9-4124

Comb. Transformers—115V/50-60 cps. Input

Item	H.V.	Amp	Filaments	Price
CT-861	2100VCT	.175	7.5VCT/4A, 2.5V/10A	$7.29
CT-142	645VCT	.080	5V/2A, 6.3V/1.2A	4.29
CT-825	360VCT	.040	6.3VCT/3.5, 6.3VCT /3A	3.95
CT-076	600V	.100	2x12.6V/1	1.95
CT-026	1000V	.250	5V/12, 5V/100	9.95
CT-15A	350VCT	.070	6.3/5, 6.3/1.8 3 lbs.	2.95
CT-071	110V	.200	33/200, 5V/10, 2.5/10	4.95
CT-378	2300V	4 MA	2.5/2	2.91
CT-367	580VCT	.080	5VCT/3A	2.25
CT-721	550VCT	.100	6.3/1, 2.5VCT/2	2.96
CT-98A	2x110VCT	.010	6.3/1A, 2.5VCT/7A	3.25
CT-91A	720V	.100	5V/3A, 6.3/3.5	3.25
CT-080	700VCT	.205	5V/3.5V/2A	3.95
CT-328	115V	2.2	40V/2.2A, 115V/2.2A	4.45
CT-441	36V	.200	5V/2.4, 5V/1.2	2.75
CT-408	350VCT	.026MA	5V/3A	2.75
CT-26B	1100VCT	.250MA	6.3V/1.5, 400V B/W	5.95
CT-631	585VCT	.086	5V/3A, 6.3V/8A	4.25
CT-810	1250	.062MA	2.5V/2.1A, 2.5V/1.75A	4.95
CT-157	350VCT	.026MA	5V/3A	2.79
CT-102	1080VCT	.085	25V/3A, 6.3V/1.8A, 6.3V/1.2A	5.95
CT-986	330V	.085	6.3V/1.2, 6.3V/600MA	1.79
CT-319	330VCT	.085	5V/2, 6.3/7.5, 6.3/.3	3.25
CT-826	510VCT	.025	12.5/900 MA, 6.3/5A	1.95

Filament Transformers—115V/50-60 cps Input

Item	Rating	Each
FT-852	23V	$1.79
FT-30B	24V/2.2A	2.25
FT-680	70V/.300, 6.3V/2A	1.95
FT-319	1.3V/6A	.79
FT-029	15.8V/1.11A	.79
FT-674	2.5V/10A, 6.3/9A	1.75
FT-23-1	6.3V/3A	1.79
FT-348	5VCT/13/5, 5VCT/6.75, 5VCT/6.75	5.95
FT-781	866 Trans. 2 x 2.5/5A	2.25
FT-38-4	6.3/2, 6.3/4.5	1.49
FT-511	3.4V/300A, 7½" x 10" x 9" /2W	14.95
FTG-31	2.5V/2.5, 7V/7A (Tape @ 2.5V/2.5A), 10 lbs.	9.95
FT-674	8.1V/1.5A	1.10
FT-127	4V/10A, 2.5V/1.75A	2.95
FT-391	6.4V/3A	1.10
FT-738	2 x 6.3VCT/3.2-1.2A	1.49
FT-481	2 x 6.3VCT/1A	1.10
FT-899	2.5V/5.5A 29000 Rms	15.95
FT-418	6.3VCT/1A, 6.3VCT/7A	2.95
FT-735	6.3VCT/5A, 6.3VCT/1A	1.79
FT-191	6V/.25A	.79
FT-738	6.3VCT/1, 2.5V/2	1.89
FT-774	6.3V/16A	3.79

Plate Transformers—115V/50-60 cps Input

Item	Rating	Each
PT-878	Auto: 120VCT/10 MA	$ .89
PT-31A	2 x 300V/5 MA	.79
PT-48A	4030VCT N. L. 3% to 1 6" H x 6" W x 7" L 20 lbs.	29.95
PT-833	4150V/400 MA 11½ x 9½ W x 9" D 70 lbs.	49.95
PT-75-2	3780/3440/3112VCT/77 MA	10.97
PT-28-1	4000VCT/.077	12.95
PT-403	Auto: 70V/1A	2.29
PT-169	120VCT/770 Ma, 590VCT/62 MA, 25 lbs	24.95
PT-170	Auto: 158/148/137/128—71 MA	3.29
PT-843	3140VCT/750 MA for 6B34S, 5C10SA	69.97
PT-139	42V/46V/50V/55V/15.2A 7½x7" W x 6¾" H	10.95
PT-837	460V/20 MA	.49
PT-589	6V/1.6A	.49
PT-67-1	82VCT/3.5A	2.95
PT-12A	280VCT/1.2A	2.95
PT-104	690V/450 MA	4.95
PT-054	960V/450 MA	5.27
PT-987	76V/.00734 KVA	1.49

SPECIAL TYPES

Item	Pri.	Output	Price
STF-946	210/220/230	25V/16A 3½" H x 2¼" x 2¼" D	$1.29
STF-443	220/440	11VCT 125A 6½" L x 6¾" H 15 lbs.	15.95
STF-639	230	5V/8A 3½" H x 4½" x 3¾"	1.25
STF-05A	115/230	2 x 5V/7.5T" H x 7" x 5" D	4.25
STF-662	220	30-25-20V/1 MA	.69
STF-968	230	2.5V/6.5A	1.10
STF-496	230/115	5V 12/9A	2.95
STF-370	220/440	3 x 2.5V/5T, 2.5V/15A, 5½ x 5 x 4½	5.25
STF-619	110/220	2.5V/500A, 7 x 3½ x 5	19.95
STF-11A	220	2 x 40V/.06/2 x 5V/8A, 12.6/1A	2.95
STF-631	230	2 x 5V/27A 2 x 5V/8A, 103/4H x 5 x 7 30 lbs	24.95
STF-96B	230	2.5V/8.5A	1.95
STF-606	220	24V/600, 5V/2A, 2 x 6.3V/1A	2.25
STF-45A	43/78/99 115/180/239	2 x 2.5/6.5, 6.3V/4 Few	3.25
STF-306	100/120 200/240	5VCT 10 amp 10000 VT	19.95

SPECIAL PLATE TRANSFORMERS

Item	Pri.	Output	Price
STP-945	210/220/30	1100VCT/300 5½ x 4 x 3½	$5.95
STP-444	230/460	230/105/115/125/ 15 lbs. 5½ x 6 x 4½	14.95
STP-843	230V	2 x 230/.05	1.29
STP-823	117V	222VCT/300 MA	2.95
STP-780	82V	4000V/.002	1.29
STP-98B	50V	2 x 750/1 MA	.98
STP-311	30/35/40	95 NL-50VFL 1 Amp. COMB.	.89
STC-627	230V	1500/150, 110V/.200, 3.3V/.200, 5V/10, 2.5-1.4/10	$2.97
STC-811	230V	280V/200, 4 x 5.3V/5	2.98
STC-18A	220V	260V/.03, 100V/ 1, 6.3V/ 4.2	2.95
STC-607	220V	780VCT/75 MA, 40VCT/ .100,15/10/15V/100 MA	3.95
STC-612	230V	400V/.50, 160/.30, 2 x 5V/2.5 w/2-502 Socket	3.96

FILTER CHOKES

ITEM	RATINGS	PRICE
CH4488	10 HY .030A	45¢
CH4791	Dual 1.75-.125 HY 100 MA	5¢
CH917	10HY .450A	12.95
CH1782	20HY .060A	1.95
CH84C	Dual .01-8.5HY 950-75MA	1.10
CH981	15HY .110A	1.89
CH782	20HY 80MA	1.49
CH921	7HY 900A	29.00
CH22-1	1HY .100A	49¢
CH779	.6HY 400A	69¢
CH922	8W .09/.018HY 3/.3A	5.95
CH528	20HY 100MA	1.69
CH922	10000HY 0MA	3.79
CH843	2.2HY 50MA	99¢
CH647	3HY 200MA	79¢
CHC39	8W15/29HY 150A	3.25
CH3647	1.8HY 180A	98¢
CH333	2.1HY .200A	1.95
CH340	15HY 15MA	99¢
CH7A-1	.577HY 7.7MA	1.49
CH781	1.75HY .100A	59¢
CH161	Dual 30HY .020A	99¢
CH373	11.5HY 90MA	1.49
CH1-A	.0458HY .900A	1.49
CH645	5HY .040A	35¢
CH884	.01HY 2.5A	1.45
CH1-B	.285HY 80MA	1.49
CH3381	14HY .250A	9.95
CH792	6HY .150A	99¢
CH143	28HY .070A	1.49
CH116	.030HY 2A	1.39
CHC32	10HY .600A	12.95
CH917	10HY .500A	12.45
CH756	30HY 225MA	99¢
CH67-1	.35HY .35A	2.49
CH238A	Dual 20HY .100A	2.95
CH238	8W 3/6HY .570/.130A	3.95
CH346	20HY .900A	7.95
CH110	25HY .065A	1.98
CH480	.333HY 1.12A	1.49
CH1-C	120HY 17MA	2.49
CH89A	Dual 1.52HY .167A	1.95
CH14A	.100HY 1.4A	1.95
CH842	8HY .800A	1.95
CH382	5HY .180A	1.45
CH246	15HY .100A	1.39
CH141	Dual 7-11HY 75-80MA	1.79
CH961	Dual .22-.44HY .6-.4A	1.75
CH351	.033HY 7A	15.95
CH584	.116HY .160A	19.95
CH11A1	.5HY .100A	79¢
CH1097	3.5HY .500A	4.95

400 CYCLE TRANSFORMERS

115 V 400 CYCLE INPUT

Ratings	Price Each
6.3V/1.5A P/O APG2	$1.49
6.4V/2.5, 400VCT/35Ma, 6.4/.150a	3.49
6.4V/7.5, 6.4/3.8, 6.4/2.5a	3.49
780V/.27V/A.7, 6.3/2.9, 1.25/.2a	2.49
6.4V/3a, 6.4V/1A	2.49
6.3V, 9.1A, 6.3VCT/6.5a, 2 x 2.5/ 3.5a	2.49
5V/2a, 6.3V/2a, 5V/2a, 6.3/.5a	2.99
5V/15A, 5000V Ins	8.95
6.3/3.7 7.5, 6.3/.66, 6.3VCT/21A	2.49
760V, 6.3V, 6.3V, 5V, 320V, 6.3V/20A	2.95
6.4/7.5, 6.4/3.8, 6.4/2.5	2.95
580V 115MA, 6.3/8.1a, 5V/2W.E.	2.95
6.3V/9.1, 6.3VCT/.65a, 2 x 2.5V/3.5A	2.95
6VCT .00006 KVA	1.49
6.4V 8a, 6.4V/1a	
1034VCT/.111a, 6 9V/10, 2 x 6.3V/ 1.5V2, 6.3/2, 63/1	6.49
525VCT/.55a, 6.3VCT/3a, 5VCT/29	3.49
400VCT/35Ma, 6.4/2.5, 6.4/15a	3.25
2300VCT Large Qty	2.25
600VCT/36Ma	1.49
2.5V/1.75, 5V/3A, 6.5V/6.5, 6.5/2a. For SCR729	3.95
640V/800Ma, 2.5V/1.75a P/o APS/15B	2.95
360VCT/20Ma, 1500V/1Ma, 2.5V, 6.3/2.5, 6.3V 6a, P/o 729A	3.95
2x2 5V/8A, 2 5V/10A, P/O APT 4	4.95
2x2.5V/.2a, 5 5V/2.25a, 1200V Tap 1000V-750V P/o AN/APS-15	4.95
742 5V 80 MA, 709V, 47 MA, 671V/45 Ma	2.95
600VCT/36 MA, 2 3/4 x 2 1/4 x 3 1/4	
1150-1150, 2 3/4 x 2 1/4 x 3 1/4	
640VCT/280 MA, 6.6V/.6, 6.3V/.6, 5V/6A	3.95
6.3V/9.1a, 2.5V/3.5a, 6.3VCT/ 2.5V/3.5a	3.25
9800V or 8600V/32 MA	12.50
582 VCT/120 MA, 6.3V/8a, 5V/2a	3.50
6340 VCT/280 MA	7.95
5V/3a, 6.3V/2a	1.75
70 to 111V @ 247-622VA	1.35
5000V/290 MA, 5V/10A	12.50
2200V/350	5.45
2.5V/5, 5200V/2 MA	14.95
13.5 KV/3.5 MA	11.50
735VCT/.177a, 1710VCT/177a	6.95
6.3V/9A, 7.7V/.365A	2.75
2.5/20A	4.85
6.3V/12a, 6.3V/2a, 6.3V/1a, P/o AN/APG-5	5.85
6.4VCT/.7.5, 6.4VCT/3.8, 6.4VCT/2.5a	4.35
6.3V/2.2, 6.3V/.66A 6.3VCT/21A	2.95
6.5V/12A, 250V/100 MA, 5V/2a, P/o AN/APS-15	2.50
400VCT/35 MA, 6.4/.15a, 6.4V/3.5a	2.25
640VCT/80 MA, 6.3VCT/2A, 5VCT/2a, P/o BS8/ARQ8	2.45
2400CT/.5MA, 640V/.5MA, 3.5V/1.75A	3.85
15.35VCT/1A	2.95
59.2V/.11A, 63V/8.1, 5V/2A, P/o APQ 13	3.95
6.3/.9, 6.3V/.6.5V/6, 640/300 MA	4.95
2 x 140V/00014A, 12QV/00012a, P/o APG2	1.95
3640V/400 Ma, P/o APT 4	7.95
23.5V Tapped 22V/47 MA	1.95
600VCT/36 Ma	1.98
780V, 27V/4.3, 6.3V/2.9, 1.35V/20A	3.95
6.4V/11 Amp. P/o APQC	2.25
2 x 6.3V/1.25a, P/o APQ13	1.95

80V 400 CYCLE INPUT

6.3V/1A, 2.5V/2A, P/o PE17A	3.95

CONDENSERS

MICA
SOLAR XMB
TAPPED HOLES

Mfd.	Price
2500 V Test	
.00001	$0.29
.00002	.29
.00003	.29
.00004	.29
.00005	.29
.00007	.29
.0001	.29
.00015	.29
.00025	.29
.0002	.29
.0003	.35
.0004	.35
.0005	.35
.00075	.35
.001	.35
.0015	.35
.0016	.35
.0017	.35
.002	.35
.0023	.35
.003	1.79
.004	1.79
.005	1.79
.0053	1.79
.0056	1.79
.0075	1.79
.0076	1.79
.008	1.79
.01	1.10
.015	1.10
.02	1.10
.023	1.10
.027	1.10
.03	1.10
5000 V Test	
.0015	1.75
.002	2.00

SOLAR XO
Solder Lugs
2500 V Test

.01	.85
.015	.85
.02	.85
.04	.85
.001	.85
.0015	.85
.0022	.85
.0023	.85
.0024	.85
.0025	.85
.0027	.85
.003	.85
.004	.85
.005	.85
.0053	.85
.0055	.85
.0056	.85
.006	.85
.0063	.85
.0065	.85
.0076	.85
.008	.85
.0085	.85
.0095	.85
.0085	.85
.00015	.85

Write For Many Others

HEADSETS & MIKES

HS23 8000Ω used Good	.49
HS 33 600Ω Used Good	.49
HS 30B Elements	66¢ ea.
HS 30B Ear Plugs 10 for 25¢	
Matching XFRHS30	3.25
Lens Cds	5¢ ea.
T45 Lip Mikes	98¢
T30 Throat Mikes	39¢
T30 Ext Cds. w/mic	79¢
141 (CD508)	1.25
Gas Mask Mike elements	49¢
Cords 3 conductor color coded 42" Long	15¢ ea.
HB4 Headband	35¢ ea.
HB1 Headband	25¢ ea.
HB30 Headband	25 ea.

WIRE WOUND POTS

2000Ω Precision 4 watt	95¢
5000Ω 1076 5 watt	95¢
20000Ω Precision 2 watt	1.25
100000Ω Precision 2 watt	1.49
Dual 500 25 watt	95¢
Dual 250Ω 50 watt	1.95
1000Ω 50 watt	98¢
2000Ω 25 watt	69¢
15Ω 25 watt	69¢
50 250 watt	2.95

Birtcher Tube Clamps

Many types in stock. Phone or write spec.

Each	15¢
10	$ 1.45
100	$12.00

Greetings

DYNA-MOTORS AT SURPLUS PRICES

Type	Input Volts	Input Amps.	Output Volts	Output Amps.	Radio Set
PE86	28	1.56	250	.060	RC 36
DM41B	14	6.2	330	.170	RU 19
DY-2/ARR-2	28	1.1	250	.080	ARC-5
DM38	28	1.4	220	.080	SCR 808
DM29	12	2.3	250	.060	BC 267
	28	1.56	375	.070	BC 348
DM31A	28	7	840	.250	BC 458
DM42	14	46	515	.110	SCR 508
			1030	.050	
			2/8		
PE10C	13/26	12.6	400	.135	SCR 515
		6.3	800	.020	
BD AR 93	28	3.35	375	.150	
23380	27	1.75	250	.075	APN-1
35CO458	28	1.3	250	.060	
ZA-088	12/24	4/3	500	.080	
ZA-068	12/24	8/4	12/375	3/110	
B-10pmk	12	9.4	275	.110	Mark II
			500	.080	
D-104	12		440	.100	
			440	.300	
DA-3A	28	10	300	.060	SCR 522
			150	.010	
			14.5	.5	
5053	28	1.4	250	.080	APN-1
PE73CM	28	19	1050	.350	BC 375
DM21	14	3.3	235	.090	BC312
CW21AAX	13	12.6	400	.135	
	26	6.3	800	.020	
			9	1.12	
BD 77KM	14	40	1000	.350	MC 191
PE94	28	10	300	.200	SCR
			150	.010	522
			14.5	.5	

PE 86 DM 32A DY 22 ARC 3 DAG 33A

Interphone Ctl Bkrs for AC-DC operation. AM1 810M 7 Amp 1614 80 Amp 1615 100 Amp U50 100 Amp Price ea. $1.10
P-0323 Dual 10 Amp. Price ea. $2.25

Super Pro Equipt.

1st and 2nd RF 10-20 MC Coil PT - SA111 RF ANT OTPT 2.5-5 MC Coil SA-116 ANT INPT 200-400 KC Coil SA161 ANT INPT 300-400 KC SA 48 HI FREQ OSC 2.5-5 MC Coil SA118 ANT OT 10-20 MC Coil SA110.
Price each .65¢

GIBSON GIRL

The Emergency Radio Transmitter. Send SOS signals automatically on 500KC. 150 mile range. No batteries required. Has hand - driven generator, tubes, wire. New. It's only $3.95

RL 9 or RL 7

Interphone Amplifier Convert to High Fidelity Phone Amp., or Sych. Amp. Compl. w/12AG, 12SL7. 2 Chokes IXFRMR. DYN for 3-6v operation, etc. $2.25

BC 605 INTERPHONE AMPLIFIER



Easily converted to an ideal intercommunications set for office —home— of factory. Complete w/conversion diagram for 110V operation.
Brand New $4.49
Used $3.95

XMTR COILS AIR WOUND

Regular Budd Buss:
80 MTR 500 watt
160 MTR 500watt
40 MTR 150 watt
80 MTR 150 watt
160 MTR 50 watt

BC-733D SUPERHET RECEIVER

w/10 Tubes, Selector-Relays operate on Xtal Controlled Freq. 108.3-110.3 MC. Can easily be converted to 2 Mtr. ham bands.

LEARN OR TEACH CODE

Uses 6-10-M - 115V DC, 115-230 VAC. Can use hookup of over 20 students. Contains speaker, blinker, freq. control, etc., in fiber trunk 17"x18"x10½". New $24.95

All. merch. guar. Mail orders promptly filed. All prices F.O.B. N. Y. C. Send MO or Chk. Only shipping chgs. sent C.O.D. Rated concerns send P.O.

Min. Order $3.00

COMMUNICATIONS EQUIPMENT CO.

Min. Order $3.00

131 Liberty St., New York, N. Y. Dept. E-1

CHAS. ROSEN

Phone: Digby 9-4124

FULLY GUARANTEED **BRAND NEW SURPLUS OFFERED BY A LEADING**

A.C. MOTORS

5071930, Delco, 115 V., 60 Cycle, 7000 r.p.m. **Price $4.50 each net.**

36938-2, Haydon Timing Motor, 110 V., 60 cycle, 2.2 w., 4/5 r.p.m. **Price $3.00 ea. net.**

Type 1600 Haydon Timing Motor—110 V., 60 cycle, 3.2 w., 4 r.p.m., with brake **Price $4.00 each net.**

Type 1600 Haydon Timing Motor—110 V., 60 cycle, 2.2 w., 1/240 r.p.m. **Price $3.00 each net.**

Type 1600 Haydon Timing Motor 110 V., 60 cycle, 2.3 w., 1 r.p.m. **Price $2.70 each net.**

Type 1600 Haydon Timing Motor, 110 V., 60 cycle, 2.2 w., 1 1/5 r.p.m. **Price $2.70 each net.**

Type 1600 Haydon Timing Motor 110 V., 60 cycle, 3.5 w., 1 r.p.m. With shift unit for automatic engaging and disengaging of gears. **Price $3.30 each net.**

Type 1600 Haydon Timing Motor, 110 V., 60 cycle, 2.2 w., 1/60 r.p.m. **Price $3.00 each net.**

Eastern Air Devices Type J33 Synchronous Motor 115 V., 400 cycle, 3 phase, 8,000 r.p.m. **Price $8.50 each net**

Telechron Synchronous Motor, Type B3, 115 V., 60 cycle, 2 r.p.m., 4 w. **Price $5.00 each net.**

Barber-Colman Control Motor, Type AYLC 5091, reversible 24 volts D.C. .7 amps 1 R.P.M., Torque 500 in. lbs. Contains 2 adjustable limit switches with contacts for position indication. Ideal for use as a remote positioner or a beam or television antenna rotator, will operate on A.C. 60 cycle. **Price $6.50 each net**

SERVO MOTORS

CK 1, Pioneer, 2 phase, 400 cycle. **Price $10.00 each net.**

CK 2 Pioneer, 2 phase, 400 cycle. **Price $10.00 each net**

10047-2-A Pioneer 2 phase, 400 cycle, with 40:1 reduction gear. **Price $10.00 each net**

FPE-25-16 Diehl Low-Inertia 20 V., 60 cycle, 2 phase, 1600 r.p.m., 85 amps. **Price $10.00 each net.**

CK2, Pioneer, 2 phase, 400 cycle, with 40:1 reduction gear. **Price $11.50 each net.**

CK5 Pioneer, 2 phase, 400 cycle. **Price $20.00 ea. net.**

MINNEAPOLIS-HONEYWELL TYPE B Part No. G303AY, 115 V., 400 cycle, 2 phase, built-in gear reduction, 50 lbs. in torque. **Price $10.00 each net.**

Kollsman Type 776-01 400 cycle 2 phase drag-up type, fix phase voltage 29, variable phase 35V. maximum, frequency 400 cycle. **Price $10.50 each net.**

REMOTE INDICATING MAGNESYN COMPASS SET

Pioneer Type AN5730-2 Indicator and AN5730-3 Transmitter 26 V., 400 cycle. **Price $40.00 per set new sealed boxes.**



Kollsman Remote Indicating Compass Set Transmitter part No. 679-01, indicator part No. 680k-03, 26 V., 400 cycle. **Price $12.50 each net.**

GYROS

Schwein Free & Rate Gyro type 46800. Consists of two 28 V. D.C. constant speed gyros. Size 8" x 4.25" x 4.25". **Price $15.00 ea. net.**

Sperry A5 Directional Gyro, Part No. 656029, 115 volts, 400 cycle, 3 phase. **Price $20.00 each net.**

Sperry A5 Vertical Gyro, Part No. 644841, 115 V., 400 cycle, 3 phase. **Price $20.00 each net.**

Sperry A5 Amplifier Rack Part No. 644890. Contains Weston Frequency Meter. 350 to 450 cycle and 400 cycle, 0 to 130 voltmeter. **Price $15.00 each net.**

Sperry A5 Control Unit Part No. 644836. **Price $7.50 each net.**

Sperry A5 Azimuth Follow-Up Amplifier Part No. 656030. With tube. **Price $5.50 each net.**

Sperry A5 Autopilot Indicator: contains Pioneer AY20 Autosyn 26 V., 400 cycle. **Price $9.50 ea. net.**

Pioneer Type 12800-1-D Gyro Servo Unit. 115 V., 400 cycle, 3 phase. **Price $15.00 each net.**

Nordon Type M7 Vertical Gyro. 26 V., D.C. **Price $19.00 each net.**

Allen Calculator, Type C1 Bank and Turn Indicator, Part No. 21500, 28 V. D.C. Contains 28 V. D.C. constant speed gyro. **Price $10.00 each net.**

Type C1 auto-pilot formation stick, part No. G1080A3. **Price $15.00 each net.**

GOVERNMENT approved instrument repair station No. 3564.

D.C. MOTORS

5069625, Delco Constant Speed, 27 V., 120 r.p.m. Built-in reduction gears and governor. **Price $7.50 each net.**

C-28P-1A, John Oster Series Motor, 27 V., 0.7 amps., 7000 r.p.m., 1/100 h.p. **Price $4.50 each net.**

Jaeger Watch Co. Type 44-K-2 Contactor Motor, Operates on 3 to 4.5 volts D.C. Makes one contact per second. **Price $2.00 each net.**

General Electric Type 5BA10AJ52C, 27 V. D.C., 0.65 amps., 14 oz. n. torque, 145 r.p.m. Shunt Wound, 4 lead reversible. **Price $6.50 each net.**

General Electric Type 5BA10AJ37C, 27 V.D.C., 0.5 amps., 8 oz., in. torque, 250 r.p.m. Shunt Wound, 4 leads reversible. **Price $6.50 each net.**

General Electric Type 5BA10J18D, 27 V. 0.7 amps. 110 R.P.M. 1 oz. ft. torque. **Price $6.50 ea. net.**

D.C. ALNICO FIELD MOTORS

S. S. FD6-16, Diehl, 27 V., 10,000 r.p.m. **Price $6.50 each net.**

S. S. FD6-18, Diehl, 27 V., 10,000 r.p.m. **Price $6.50 each net.**

S. S. FD6-21, Diehl, 27 V., 10,000 r.p.m. **Price $6.50 each net.**

5069466 Delco 27.5 V. 10,000 R.P.M. **Price $10.00 ea. net**

706343 Delco 27.5 V. 10,000 R.P.M. Shaft 0.5 in. long. **Price $7.50 ea. net.**

5068571 Delco 27.5 V. 10,000 R.P.M. with blower assembly. **Price $10.00 ea. net.**

5071895 Delco 27.5 V. 250 R.P.M. **Price $10.00 ea. net.**

5072400 Delco 27.5 V. 10,000 R.P.M. Shaft 0.5 in. long with worm gear. **Price $6.75 ea. net.**

GENERAL ELECTRIC D. C. SELSYNS

8TJ9-PAB Transmitter, 24 V. **Price $3.75 each net.**

8DJ11-PCY Indicator, 24 V. Dial marked —10° to +65°. **Price $4.50 each net.**

8DJ11-PCY Indicator, 24 V. Dial Marked 0 to 360°. **Price $7.50 each net.**

AMPLIFIER

Pioneer Gyro Flux Gate Amplifier, Type 12076-1-A. **Price $17.50 ea. net, with tubes.**

G. E. Servo Amplifier Type 2CV2A1, 115 V. 400 cycle. **Price $10.00 ea. net.**

Minneapolis Honeywell Amplifier Type G403, 115 V. 400 cycle. **Price $8.00**

INSTRUMENT ASSOCIATES

37 EAST BAYVIEW AVE., GREAT NECK, N. Y.
Telephone GReat Neck 4-1147

Write for Catalog NE100

U. S. Export License-2148

SUPPLIER OF ELECTRONIC & AIRCRAFT EQUIPMENT

IMMEDIATE DELIVERY

INVERTERS

Wincharger Corp. Inverter PU/16 type MG 750, Input 24 V.D.C., 60 amps. Output 115 V, 400 cycle, 1 phase, 6.5 amps. **Price $60.00 each net.**

Leland type 10285, Input 28 V. D.C. at 60 amps. Output 115 V. 3 phase at 750 V.A., 26 V., 400 cycle, single phase at 50 V.A.
Price $100.00 each net

149H, Holtzer Cabot. Input 28 V. at 44 amps. Output 26 V. at 250 V.A., 400 cycle and 115 V. at 500 V.A., 400 cycle. **Price $40.00 each net.**

149F, Holtzer Cabot. Input 28 V. at 36 amps. Output 26 V. at 250 V.A., 400 cycle and 115 V. at 500 V.A., 400 cycle. **Price $40.00 each net.**

12117, Pioneer. Input 12 V.D.C. Output 26 V., 400 cycle, 6 V.A.
Price $22.50 each net.

12117-2 Pioneer. Input 24 V.D.C. Output 26 V. 400 cycle, 6 V.A.
Price $20.00 each net.

12116-2-A Pioneer. Input 24 volts D.C., 5 amps. Output 115 volts 400 cycle single phase 45 watts.
Price $100.00 each net.

5D21NJ3A General Electric. Input 24 V.D.C. Output 115 V., 400 cycle at 485 V.A. **Price $25.00 each net.**

PE 218, Ballentine. Input 28 V.D.C. at 90 amps. Output 115 V., 400 cycle at 1.5 K.V.A. **Price $50.00 each net.**

ACTUATORS

White Rodgers Electric Co. type 6905, number 3, 12 V., D.C., 1.3 amps., 1½ RPM, torque 75" in lbs., contains adjustable limit switches.
Price $10.50 each net

METERS

Weston Frequency Meter, Model 637, 350 to 450 cycles, 115 volts.
Price $10.00 each net.

Weston Voltmeter. Model 833, 0 to 130 volts, 400 cycle. **Price $4.00 each net.**

Weston Voltmeter. Model 606, Type 204 P, 0 to 30 volts D. C.
Price $4.25 each net.

Weston Ammeter. Model 506, Type S-61209, 20-0 100 amps. D. C.
Price $7.50 each net with ext. shunt.

Weston Ammeter. Type F1, Dwg. No. 116465, 0 to 150 amps. D. C.
Price $6.00 each net.
With ext. shunt $9.00 each net.

Westinghouse Ammeter. Type 1090-D-120, 120-0-120 amp. D. C.
Price $4.50 each net.

Weston Model 545. Type 82PE Indicator. Calibrated 0 to 3000 RPM. 2¾" size. Has built-in rectifier, 270° meter movement.
Price $15.00 each net.

Westinghouse Ammeter, type E1, part No. 1162965, range 0-300 amps. D.C.
Price $7.50 each net.

Weston Voltammeter, type 201-P, Mod. 606, range 0-30 volts D.C. and 0-30 amps. with shunt.
Price $12.50 each net.

RECTIFIER POWER SUPPLY

General Electric, Input 230 V. 60 cycle 3 phase. Output 130 amps. at 28 V. D.C. Continuous duty, fan cooled, has adjustable input taps. G.E. model No. 6RC146F. Size: Height 46", width 28", depth 17½". **Price $225.00 each net. New**

PIONEER AUTOSYNS

AY1, 26 V., 400 cycle.
Price $7.50 each net.

AY14D, 26 V., 400 cycle, new with calibration curve.
Price $15.00 each net.

AY20, 26 V., 400 cycle.
Price $7.50 each net.

AY3, 26V., 400 cycle. Has hollow shaft.
Price $7.50 ea. net.

AY54D, 26 V., 400 cycle, with pointer for I 81 & I 82 Indicator.
Price $10.50 each net

PRECISION AUTOSYNS

AY131D, new with calibration curve.
Price $35.00 each net.

AY201-2-A. **Price $35.00 each net.**

PIONEER AUTOSYN POSITION INDICATORS

Type 5907-17. Dial graduated 0 to 360°, 26 V., 400 cycle.
Price $20.00 each net.

Type 6007-39, Dual, Dial graduated 0 to 360°, 26 V., 400 cycle.
Price $30.00 each net.

PIONEER TORQUE UNIT

Type 12606-1-A. Price $40.00 each net.

MAGNETIC AMPLIFIER ASSEMBLY

Pioneer Magnetic Amplifier Assembly Saturable Reactor type output transformer. Designed to supply one phase of 400 cycle servo motor.
Price $12.50 each net.

PIONEER TORQUE UNIT AMPLIFIER

Type 12073-1-A, 5 tube amplifier, Magnesyn input, 115 V., 400 cycle.
Price $17.50 each net with tubes.

BLOWER ASSEMBLY MX-215/APG

John Oster, 28 V.D.C., 7000 r.p.m 1/100 h.p. **Price $5.00 each net.**

Westinghouse Type FL Blower, 115 V., 400 cycle, 6700 r.p.m., Airflow 17 C.F.M. **Price $5.00 each net.**

RATE GENERATORS

F16, Electric Indicator Co., two-phase. 22 V. per phase at 1800 r.p.m.
Price $12.00 each net.

J36A, Eastern Air Devices, .02 V. per r.p.m. **Price $9.00 each net.**

B-6B, Electric Indicator Co., Rotation Indicator, 110 V., 60 cycle, 1 phase
Price $14.00 each net.

PM-1-M Electric Indicator Co. Same as type B35. 2 V. per 100 R.P.M. Max speed 5,000 R.P.M. Can be used as D.C. motor, 1/77 H.P. 115 V. D.C.
Price $14.00 ea. net.

SINE-COSINE GENERATORS

(Resolvers)

FPE 43-1, Diehl, 115 V., 400 cycle.
Price $20.00 each net.

SYNCHROS

1F Special Repeater, 115 V., 400 cycle. Will operate on 60 cycle at reduced voltage.

Price $15.00 each net.

2J1F3 Selsyn Generator 115 volts, 400 cycle. **Price $5.50 each net.**

2J1G1 Control Transformer, 57.5/57.5 V., 400 cycle. **Price $1.90 each net**

2J1H1 Selsyn Differential Generator 57.5/57.5 V., 400 cycle.
Price $3.25 each net.

W. E. KS-5950-L2, Size 5 Generator 115 V., 400 cycle.
Price $10.00 each net.

1G Generator 115 V., 60 cycle.
Price $40.00 each net

5G Generator 115 volts, 60 cycle.
Price $50.00 each net

2J1F1 Selsyn Generator, 115 V., 400 cycle. **Price $3.50 each net.**

5SDG Differential Generator 90/90 V., 400 cycle. **Price $15.00 each net.**

1CT Control Transformer, 90/55 volts, 60 cycle. **Price $40.00 each net.**

POSITION TRANSMITTER

Pioneer Type 4550-2-A Position Transmitter, 26 volts 400 cycle, gear ratio 2:1. **Price $15.00 each net.**

ALL PRICES, F. O. B. GREAT NECK, N. Y.

INSTRUMENT ASSOCIATES

37 EAST BAYVIEW AVE., GREAT NECK, N. Y.
Telephone GReat Neck 4-1147

Write for Catalog NE100

Western Union address: WUX Great Neck, N. Y.



D-245

KING of the WIRE WOUND POTENTIOMETERS

Immediate Delivery—Perfect Boxed Material
Leading Manufacturer—Excellent Selection
Your Satisfaction Positively Guaranteed

WIREWOUND POTENTIOMETERS

Ohm	Watt	Bushing	Shaft	Cat. No.	Stock No.	Quan.	List Price
2	25	5/8S	1/8SD	O—H	8A-1	523	$5.20
2-5 (Dual)	25	1/2	1/2	I	8A-2	1339	5.20
15	25	3/8	1"	C	8A-3	175	5.20
15	25	3/8	1 1/8	D—245	8A-4	213	5.20
15	25	1/2	1 1/4	I	8A-5	10	5.20
20	25	1/2	1/2F	D—245	8A-6	277	5.20
25	25	1/2	1.2F	C	8A-7	31	5.20
25	25	3/8	1"	D—245	8A-8	512	5.20
25	25	1/2	5/8S	I	8A-9	7	5.20
30	25	3/8	1"	C	8A-10	101	5.20
50	25	3/8	1 1/8	D—245	8A-11	5569	5.20
50	25	5/8	1/8SD	O—H	8A-12	1051	5.20
75	25	1/2	7/16	O—H	P-84	79	5.20
100	25	3/8	1"	D—245	8A-13	148	5.20
100	25	1/2	1/2	H	8A-14	52	5.20
225	50	3/8	11/16	D—241	8A-15	132	5.85
350	25	3/8	1 1/8	O—H	8A-16	592	5.20
350RHO	25	3/8	1 1/8	H	8A-17	369	5.20
500	25	3/8	11/16	D—245	8A-18	419	5.20
800	50	3/8	7/16F	O—J	8A-19	76	6.15
1K	25	1/2	1/2	O—H	8A-20	148	5.85
3K	25	3/8	1 3/16	D—245	8A-21	256	6.15
5K	25	1/2	1/8SD	I	8A-24	31	6.15
5K	25	3/8	7/8FS	D—245	8A-25	7640	6.15
5K	50	3/8	7/16	O—J	P-67	7	8.50
20K	25	1/2	1/8SD	D—245	8A-26	6901	7.00

Ohm	Watt	Bushing	Shaft	Type	Body Dia.	Stock No.	Quan.	List Price
6	4	3/8	7/16	CTS	1 9/16	P-68	77	$2.25
10	2	3/8	1 5/8	—	1 5/16	P-44	112	1.75
10	2	3/8	2"	C	1 1/8	P-1	48	1.75
20	2	1/2	1/4SD	CTS	1 1/4	4A-37	76	2.25
20	4	3/8	3/8FD	M	1 5/8	P-3	75	2.25
20	4	3/8	1/4SD	CTS	1 9/16	P-4	8	2.25
50	2	3/8	7/8F	CTS	1 1/4	P-69	80	2.25
50	4	3/8	1 1/16	CTS	1 9/16	P-70	10	2.25
50	4	3/8	5/16F	CTS	1 9/16	P-71	21	2.25
50	4	3/8	3/8SD	M	1 1/16	P-5	226	2.25
75	2	3/8	5/8	CTS	1 1/4	P-28	8	2.25
100	2	5/8	3/8F	—	1 5/16	P-32	270	2.00
100	4	3/8	5/16	CTS	1 9/16	P-6	352	2.25
100	4	3/8	1"	C	1 1/4	4A-58	31	2.00
200	2	3/8	7/8	CTS	1 1/4	P-22	28	2.25
285	2	1/2	1.8SD	CTS	1 1/4	P-83	100	2.25
300	2	3/8	3/8	CTS	1 1/4	P-73	12	2.25
300	4	3/8	3/8	M	1 5/8	P-7	31	2.25
350	2	3/8	1 1/8	—	1 1/4	P-43	28	1.75
350	2	3/8	1/2	CTS	1 1/4	P-23	54	2.25
500	2	3/8	1.2	CTS	1 1/4	P-24	100	2.25
1K	4	3/8	3/8	CTS	1 9/16	P-10	99	2.25
1K	2	3/8	3.8SD	CTS	1 1/4	P-25	7	2.25
2K	2	1/2	1.8F	CTS	1 1/4	P-26	79	2.25
2K	4	3/8	1/8SD	CTS	1 9/16	P-81	44	2.25
3K	4	3/8	1/2	C	1 5/8	8A-38	16	2.25
3K	4	3/8	1.2	CTS	1 9/16	P-82	100	2.25
4K	4	3/8	1/2SD	CTS	1 9/16	P-13	87	2.25
5K	2	3/8	7/16SD	CTS	1 1/4	P-28	244	2.25
5K	4	1/2	1 7/8	T	1 5/8	8A-40	194	2.25
5K	4	1/2	1/2SD	T	1 5/8	8A-39	2344	2.25
7.5K	4	7/16	3/8SD	CTS	1 9/16	P-17	31	2.25
10K	2	3/8	1.2SD	CTS	1 1/4	P-75	219	2.25
10K	2	3/8	1 15 16	CTS	1 1/4	P-79	766	2.25
10K	2	3/8	1 4SD	—	1 5/16	P-80	10	1.75
10K	2	3/8	3/8F	—	1 1/4	P-57	29	1.75
10K	4	1/2	5/8	T	1 5/8	8A-42	882	2.25
10K	4	3/8	3/8	CTS	1 9/16	P-15	27	2.25
10K	4	3/8	1/2	CTS	1 9/16	P-76	31	2.25
15K	4	3/8	1 2SD	CTS	1 9/16	P-17	146	2.25
20K	4	5/8	2 3.4	CTS	1 9/16	P-77	29	2.25
25K	6	3/8	1 3/16	CTS	1 15 16	P-78	8	2.25
40K	4	3/8	3/8SD	M	1 5/8	P-81	66	2.25

PRECISION POTENTIOMETERS

Ohm	Watt	Cat. No.	Stock No.	Quan.	List Price
10	6	D—292	8A-27	23	$6.00
12	6	301AS	8A-28	14	6.00
5K	6	M—314A	P-66	76	8.50
10K	6	D—296D	8A-30	2	15.00
10K	12	D—271	8A-31	2	15.00
10K	12	271A	8A-32	70	15.00
20K	6	D5083-G2	8A-33	101	6.00
20K	6	D—269	8A-34	757	8.50
20K	6	M—314A	P-65	65	8.50
100K	25	433A	8A-35	14	32.50
100K	25	D—501	8A-36	2	32.50

WIRE WOUND POTENTIOMETER— DISCOUNT SCHEDULE

1 to 49..80% *off* list price
50 to 199..80 & 10% *off* list
200 and up..80 & 10 & 10% *off* list

Different items may NOT be mixed for discount. Quantity discount allowed only to quantity shown. NEDA members write.

COMPOSITION POTENTIOMETERS

Ohm	Taper	Bushing	Shaft	Type	Stock No.	Quan	Net Price
75	Lin.	3/8	3/8	J	P-34	45	$1.00
200	Lin.	1/4	9.32	J	P-62	89	.75
1K	Lin.	1/2S	1/2	J	P-41	6	1.50
1K	Lin.	3/8	3/8SD	—	P-36	75	.35
1.5K	Lin.	3/8	1/8SD	J	P-60	80	.75
2K	Lin.	1/2S	1/8	J	P-38	90	.45
5K	Lin.	5/16	1/2	J	P-39	46	.75
10K	Lin.	3/8	3/8	J	P-40	22	.75
10K	Lin.	1/2S	3/16SD	J	4A-61	48	.75
10K	Lin.	3/8	1/2	J	P-58	36	1.00
50K	Lin.	3/8	3/8	CTS	P-61	8	.70
75K	Lin.	3/8	3/8F	CTS	P-64	28	.40
10-75K	Lin.	3/8	3/8	J	P-43	35	.70
100K	Lin.	3/8	7/16	J	4A-66	48	1.00
100K	Lin.	3/8	2 1/4S	J	P-56	117	1.25
300K	Lin.	1/2	1/8SD	J	P-35	115	.75
25-400K	Lin.	1/4	5/16	J	P-42	79	.70
500K	Tap.	3/8	3/8	CTS	P-44	15	.40
1Meg.	Tap.	3/8	7/8	—	P-50	153	.40
1Meg.	Lin.	1/4	3/8	—	P-45	85	.70
2Meg.	Lin.	3/8	3.8F	CTS	P-55	45	.40
2Meg.	Lin.	5/8	1 9/16	CTS	P-48	79	.40
2Meg.	Lin.	1/2	7/16F	J	P-49	208	1.00
10Meg.	Lin.	3/8	2 1/2	J	P-49	27	.49



Write for our Unique Flyers. Complete Stocks of AN Connectors, Turret Sockets, Turret Lugs, Mounting Boards, Tube Sockets, Glass to Metal Seals, Stand-off Insulators, Etc.

Widely Known for Fair Dealing and Good Service.

HAROLD H. POWELL

632 Arch Street **Philadelphia 6, Pa.** **MArket 7-5650**

AN CONNECTORS

FAST SERVICE - LOW COST

Insert	Shell & Price				
	3100	3102	3106	3108	3101
8S-1S	$.64	$.48	$.64	$1.02	$.62
8S-1P	.62	.46	.64	1.03	.64
10S-2S	.59	.43	.56	.99	
10S-2P	.57	.43	.56	1.00	
10SL-3S			.79	1.03	
10SL-3P	.69	.57	.79		.71
10SL-4S			.61	1.10	
10SL-4P	.64	.48			.65
12S-3S	.65	.48	.77	1.10	.69
12S-3P	.59	.50	.79	1.15	.68
12S-4S	.55	.41	.64	1.09	.62
12S-4P	.56	.41	.64	1.10	.62
12-5S	.64	.56	.79	1.26	.77
12-5P	.61	.50	.77	1.13	.69
14S-1S	.71	.53	.95	1.27	.81
14S-1P	.71	.53	.96	1.27	.81
14S-2S	.75	.57	.96	1.36	.79
14S-2P	.83	.65	.95	1.48	.87
14-3S	.91	.57	.87	1.36	.83
14-3P	.83	.57	1.02	1.36	.88
14S-4S	.68	.47	.91	1.26	.68
14S-4P	.54	.43	.77	1.13	.59
14S-5S	.85	.63	.98	1.49	.93
14S-5P	.85	.64	1.14	1.49	.90
16S-4S	1.03	.86	1.23	1.68	.98
16S-4P	1.05	.84	1.19	1.65	1.04
16S-2S	.89	.65	1.18	1.58	.89
16S-3P	.79	.57	.98	1.36	.78
14S-9S	.83	.60	.98	1.43	.83
14S-9P	.93	.57	.88	1.34	.77
16S-1S	1.08	.89	1.29	1.84	1.15
16S-1P	1.16	.78	1.29	1.76	1.15
14-2S	.91	.67	1.09	1.43	.92
14-2P	.83	.59	.99	1.43	.85
16S-3S	.73	.50	.89	1.36	.77
16S-3P	.73	.50	.89	1.36	.77
16S-4S	.77	.54	.93	1.17	.81
16S-4P	.77	.58	.93	1.42	.81
16S-5S	.87	.69	1.10	1.43	.95
16S-5P	.97	.63	1.06	1.50	.90
16S-6S	.85	.61	1.01	1.50	.95
16S-6P	.85	.61	1.01	1.49	.87
16-7S	1.07	.83	1.04	1.66	1.09
16-7P	.95	.73	1.12	1.56	1.01
16S-8S	.93	.73	1.13	1.46	1.09
16S-8P	1.05	.77	1.15	1.49	.99
16-9S	1.09	.85	1.30	1.72	1.15
16-9P	1.03	.81	1.20	1.62	1.07
16-10S	.95	.65	1.25	1.62	1.11
16-10P	.91	.69	1.09	1.54	.95
16-11S	.95	.73	.99	1.57	1.01
16-11P	.91	.64	1.09	1.52	.95
16-12S	1.05	.81	1.23	1.65	1.09
16-12P	.95	.71	1.11	1.56	1.01
18-1S	1.46	1.15	1.57	2.07	1.52
18-1P	1.40	1.25	1.79	2.29	1.44
18-2S	.98	.83	1.45	1.82	1.19
18-2P	.98	.83	1.45	1.82	1.19
18-3S	1.11	.85	1.46	1.78	1.01
18-3P	1.09	.89	1.19	1.70	.99
18-4S	1.15	.73	1.25	1.88	1.17
18-4P	1.11	.73	1.26	1.82	1.18
18-5S	1.11	.73	1.26	1.78	1.10
18-5P	1.19	.67	1.16	1.77	1.07
18-6S	1.15	.73	1.32	1.76	1.17
18-6P	1.10	.69	1.14	1.70	1.13
18-7S	1.34	.91	1.65	2.11	1.37
18-7P	1.15	.83	1.17	1.82	1.07
18-8S	1.48	1.18	1.60	2.00	1.60
18-8P	1.44	1.05	1.48	1.97	1.46
18-9S	1.44	.98	1.76	2.10	1.48
18-9P	1.44	1.15	1.74	2.07	1.48
18-10S	1.40	.98	1.93	2.10	1.48
18-10P	1.43	.87	1.37	1.90	1.30
18-11S	1.44	.98	1.74	2.17	1.36
18-11P	1.28	.93	1.57	1.97	1.33
18-12S	1.28	1.00	1.34	1.86	1.30
18-12P	1.44	.89	1.34	2.00	1.27
18-13S	1.85	1.36	2.27	2.47	1.76
18-13P	1.85	1.36	2.27	2.47	1.77
18-14S	1.54	1.01	1.44	2.04	1.44
18-14P	1.35	.93	1.44	2.00	1.26
18-16S	1.23	.69	1.30	1.90	1.06
18-16P	1.23	.67	1.34	1.70	1.04
18-20S	1.19	.83	1.26	1.80	1.20
18-20P	1.32	.85	1.30	2.00	1.12
18-22S	1.41	.83	1.48	1.87	1.27
18-22P	1.09	.65	1.52	1.70	1.09
18-23S	1.44	.87	1.76	1.92	1.30
18-24P	1.52	.95	1.84	2.00	1.38
18-30S	1.19	.85	1.26	1.80	1.12
18-30P	1.32	.85	1.30	2.00	1.25
18-31S	1.19	.85	1.30	1.80	1.12
18-31P	1.32	.85	1.30	2.00	1.25
20-1S	1.77	1.44	1.90	1.94	1.88
20-1P	2.28	1.54	2.37	2.39	2.53
20-2S	1.30	.77	1.61	1.70	1.35
20-2P	1.30	.74	1.58	1.63	1.32
20-3S	1.48	.90	1.70	1.85	1.50
20-3P	1.34	.69	1.52	1.94	1.43
20-4S	1.35	.83	1.50	1.97	1.35
20-4P	1.35	.77	1.49	1.94	1.28
20-5S	1.23	.67	1.38	1.75	1.28
20-5P	1.15	.57	1.42	1.68	1.17
20-6S	1.30	.83	1.43	1.75	1.26
20-6P	1.30	.73	1.44	1.68	1.33
20-7S	1.41	1.15	1.52	2.04	1.44
20-7P	1.73	1.30	1.85	2.24	1.88
20-8S	1.76	1.20	2.13	2.13	1.77
20-8P	1.68	1.12	1.95	2.04	1.71
20-9S	1.71	1.16	1.91	2.10	1.76
20-9P	1.66	1.10	1.85	2.04	1.68

Insert	Shell & Price				
	3100	3102	3106	3108	3101
20-11S	1.68	1.05	1.68	1.83	1.76
20-11P	1.68	1.09	1.97	1.83	1.68
20-12S	1.42	.87	1.77	1.80	1.44
20-12P	1.35	.81	1.52	1.74	1.38
20-14S	1.76	1.25	2.22	2.16	1.77
20-14P	1.84	1.17	1.66	2.12	1.77
20-15S	1.82	1.28	2.08	2.21	1.88
20-15P	1.88	1.04	1.94	1.97	1.64
20-16S	1.82	1.32	1.96	2.25	1.92
20-16P	1.77	1.24	1.98	2.17	1.80
20-17S	1.77	1.24	2.07	2.17	1.82
20-17P	1.68	1.13	1.84	2.07	1.72
20-18S	1.93	1.37	2.33	2.33	1.97
20-18P	1.78	1.12	2.17	2.09	1.72
20-19S	1.68	1.12	2.16	2.07	1.70
20-19P	1.86	1.08	1.68	2.01	1.66
20-20S	1.78	1.12	1.76	2.10	1.72
20-20P	1.82	.96	1.76	1.91	1.66
20-21S	1.84	1.28	1.97	2.25	1.90
20-21P	1.77	1.25	2.17	2.17	1.77
20-22S	1.77	1.25	2.18	2.18	1.82
20-22P	1.70	1.15	1.82	2.10	1.74
20-23S	1.68	.93	1.88	1.88	1.52
20-23P	1.35	.81	1.52	1.76	1.38
20-24S	1.57	1.03	1.68	1.88	1.60
20-24P	1.40	.93	1.64	1.87	1.52
20-26S	1.38	.99	2.02	1.93	1.56
20-26P	1.38	.89	1.52	1.82	1.48
20-27S	1.79	1.44	1.90	2.37	2.02
20-27P	1.25	1.84	2.37	2.77	2.42
20-28S	1.79	1.44	1.90	2.24	2.02
20-28P	2.28	1.54	2.37	2.67	2.58
20-29S	3.40	3.40	4.50	5.62	4.50
20-29P	3.40	3.40	4.50	5.62	4.50
22-1S	1.41	.81	1.70	2.02	1.48
22-1P	1.36	.75	1.72	1.92	1.37
22-2S	1.72	1.15	2.10	2.01	1.74
22-2P	1.58	1.02	1.76	2.13	1.60
22-3S	1.49	.92	1.92	2.01	1.80
22-3P	1.34	.79	1.88	1.90	1.34
22-4S	1.48	1.00	1.82	2.26	1.64
22-4P	1.48	.95	1.64	2.02	1.56
22-5S	1.56	1.03	1.66	2.13	1.88
22-5P	1.48	1.48	1.56	2.04	1.48
22-6S	1.52	.95	2.02	2.04	1.53
22-6P	1.43	.85	1.72	1.43	1.43
22-7S	1.84	.99	1.90	2.10	1.54
22-7P	1.36	.81	1.66	1.92	1.36
22-8S	1.49	1.00	1.64	2.19	1.56
22-8P	1.18	.50	1.56	1.77	1.25
22-9S	1.48	.98	1.97	2.02	1.50
22-9P	1.28	.76	1.66	1.66	1.30
22-10S	1.23	.87	1.42	1.94	1.35
22-10P	1.35	.81	1.56	1.92	1.37
22-11S	1.38	.85	1.64	1.93	1.43
22-11P	1.16	.78	1.30	1.80	1.51
22-12S	1.68	1.10	1.92	2.22	1.72
22-12P	1.54	.99	1.74	2.10	1.57
22-13S	1.72	1.15	2.14	2.25	1.72
22-13P	1.44	1.03	1.62	2.11	1.60
22-14S	2.09	1.85	2.21	2.72	2.40
22-14P	2.35	1.77	2.82	2.89	2.35
22-15S	2.08	1.50	2.55	2.61	2.10
22-15P	1.58	1.07	1.74	2.16	1.64
22-16S	1.97	1.40	2.44	2.53	2.00
22-16P	1.74	1.20	2.24	2.28	1.76
22-17S	1.68	1.20	2.24	2.28	1.70
22-17P	1.77	1.23	2.04	2.33	1.80
22-18S	1.64	1.15	1.82	2.25	1.74
22-18P	1.57	1.00	2.04	2.11	1.56
22-19S	1.82	1.40	1.96	2.47	2.10
22-19P	1.96	1.40	2.04	2.50	1.97
22-20S	1.54	1.23	1.70	2.20	1.77
22-20P	1.64	1.07	1.82	2.08	1.66
22-21S	1.82	1.42	2.01	2.58	1.92
22-21P	1.44	1.09	1.82	2.20	1.67
22-22S	1.74	1.17	2.10	2.26	1.76
22-22P	1.48	1.10	1.91	2.20	1.68
22-23S	2.00	1.44	2.47	2.35	2.02
22-23P	1.76	1.30	2.14	2.32	1.76
22-24S	1.44	1.08	1.68	2.18	1.66
22-24P	1.46	.89	1.55	2.00	1.48
22-25S	1.64	1.09	2.10	2.20	1.68
22-25P	1.82	.95	1.76	2.08	1.52
22-26S	1.80	1.25	1.92	2.35	1.80
22-26P	1.48	1.12	1.90	2.22	1.70
22-27S	1.96	1.47	2.13	2.57	2.02
22-27P	1.72	1.32	1.90	2.37	1.94
22-28S	1.82	1.26	2.01	2.37	1.82
22-28P	1.52	.95	2.00	2.06	1.54
22-29S	1.92	1.36	2.16	2.45	1.94
22-29P	1.80	1.25	2.18	2.32	1.86
22-33S	1.97	1.34	1.76	2.30	1.68
22-33P	1.68	1.15	2.05	2.23	1.70
22-34S	1.66	1.09	1.95	2.20	1.68
22-34P	1.52	1.00	1.72	2.12	1.58
22-36S	1.85	1.70	1.95	2.28	1.66
22-36P	1.52	1.00	1.72	2.12	1.58
24-1S	1.77	1.06	2.12	2.24	1.74
24-1P	1.49	2.03	1.82	2.20	1.60
24-2S	1.95	1.21	2.25	2.48	1.92
24-2P	1.65	1.05	1.80	2.28	1.72
24-3S	1.72	1.20	2.01	2.36	1.87
24-3P	1.52	1.34	1.86	2.21	1.52
24-4S	1.85	1.23	2.25	2.39	1.92
24-4P	1.52	1.02	1.93	2.26	1.70
24-5S	1.87	1.76	2.16	2.63	2.18
24-5P	2.08	1.36	2.05	2.75	2.25
24-7S	2.20	1.88	2.47	2.98	2.55
24-7P	2.12	1.60	2.42	2.88	2.41
24-9S	1.98	1.40	2.31	2.76	2.10
24-9P	1.84	.99	1.85	2.14	1.64

Insert	Shell & Price				
	3100	3102	3106	3108	3101
24-10S	2.22	1.50	2.54	2.74	2.19
24-10P	2.18	1.46	2.50	2.63	2.16
24-11S	2.42	1.70	2.75	2.87	2.37
24-11P	1.95	1.43	2.27	2.60	2.12
24-12S	2.02	1.90	2.31	2.80	2.36
24-12P	1.85	1.22	1.86	2.39	1.92
24-14S	2.00	1.28	2.33	2.45	2.00
24-14P	1.69	1.92	2.25	1.70	
24-15S	2.81	1.58	2.63	2.77	2.35
24-15P	1.87	1.76	2.16	2.67	2.17
24-16S	2.11	1.38	1.87	2.37	2.07
24-16P	1.68	1.12	1.68	2.02	1.82
24-17S	2.03	1.23	2.27	2.78	2.25
24-17P	1.52	1.00	1.83	2.17	1.62
24-19S	2.24	1.52	2.20	2.69	2.29
24-19P	1.82	1.32	2.13	2.51	2.02
24-20S	2.25	1.52	2.38	2.59	2.26
24-20P	2.45	1.77	2.65	2.82	2.43
24-21S	1.93	1.46	2.27	2.88	1.66
24-21P	1.84	1.25	2.02	2.55	1.82
24-25S	2.92	2.25	3.23	3.30	2.90
24-25P	4.72	3.03	3.80	4.08	3.67
28-2S	2.24	1.43	2.47	3.06	2.37
28-2P	2.10	1.42	2.36	2.82	2.33
28-3S	2.22	1.36	2.63	2.79	2.30
28-3P	1.74	1.01	2.16	2.41	1.85
28-4S	2.03	1.42	2.38	2.70	2.04
28-4P	1.74	1.15	2.03	2.50	2.10
28-5S	2.34	1.44	2.73	2.96	2.36
28-5P	1.98	1.16	2.35	2.62	2.08
28-6S	2.41	1.58	2.79	2.95	2.41
28-6P	1.98	1.33	2.37	2.65	2.02
28-7S	2.13	1.20	2.47	2.62	2.13
28-7P	1.70	1.03	2.10	2.49	1.80
28-8S	1.88	1.46	2.04	3.06	2.39
28-8P	2.03	1.46	2.29	2.99	2.43
28-9S	2.53	2.17	2.89	3.47	2.90
28-9P	2.16	1.48	2.50	2.89	2.54
28-10S	2.59	1.68	2.97	3.18	2.59
28-10P	2.39	1.52	2.79	2.95	2.42
28-11S	2.97	2.33	3.36	3.78	3.28
28-11P	2.80	2.08	2.81	3.40	2.89
28-12S	2.62	2.38	2.98	3.83	3.00
28-12P	1.84	2.19	3.02	3.62	3.10
28-13S	2.42	1.66	2.66	3.40	2.58
28-13P	2.70	2.00	3.82	4.24	3.71
28-18S	2.38	2.05	2.68	3.21	2.64
28-14P	2.75	2.50	3.10	3.33	2.75
28-17S	2.03	1.27	2.50	2.97	2.35
28-17P	2.34	1.48	2.67	2.87	2.46
28-18S	2.45	1.82	2.83	3.25	2.55
28-18P	2.24	1.48	2.62	2.89	2.35
28-19S	2.14	1.54	2.65	2.83	2.45
28-19P	1.85	1.24	2.24	2.65	2.14
28-20S	2.52	1.99	2.84	3.20	2.90
28-20P	2.20	1.60	2.50	3.03	2.53
28-22S	2.73	1.88	3.06	3.22	2.73
28-22P	2.56	1.80	2.79	2.98	2.59
32-1S	3.66	1.76	3.10	3.35	2.74
32-1P	2.34	1.56	2.72	3.11	2.53
32-6S	4.30	3.35	4.70	4.96	4.32
32-6P	4.70	3.52	4.74	4.39	4.79
32-7S	4.25	3.32	4.73	4.93	4.26
32-7P	3.90	2.88	3.75	4.58	3.94
32-8S	3.87	2.98	4.30	4.60	3.96
32-8P	3.60	2.87	4.05	4.26	3.48
32-9S	3.84	2.68	3.73	4.28	3.45
32-9P	3.90	2.64	3.60	4.03	3.63
32-10S	3.12	2.29	3.48	3.87	3.25
32-10P	2.49	1.74	2.84	3.23	2.69
32-14S	4.30	3.48	4.70	5.08	4.35
32-14P	4.30	3.48	4.74	4.40	4.35
32-20S	3.98	3.48	4.40	4.40	4.35
32-20P	3.25	2.84	3.85	4.44	3.78
34-1S	3.84	2.88	3.45	4.38	3.72
34-1P	3.38	2.15	3.46	4.38	3.32
34-7S	5.16	4.33	4.98	5.98	4.82
34-7P	4.13	3.45	5.43	5.43	4.78
36-9S	5.04	4.20	5.40	5.88	5.10
36-9P	3.80	3.39	4.85	5.08	4.40
36-10S	3.80	3.39	4.85	5.08	4.40
36-10P	3.80	3.39	4.85	5.08	4.40
36-11S	3.80	3.39	4.85	5.08	4.40
36-11P	3.80	3.39	4.85	5.08	4.40
36-15S	3.86	3.20	3.93	4.61	4.16
36-15P	3.84	3.06	4.08	4.61	4.10
36-19S	3.40	4.00	3.90	4.43	4.80
36-19P	3.40	4.00	3.90	4.43	4.80
40-1S	4.98	3.63	5.45	5.15	5.00
40-1P	4.33	2.63	4.45	4.45	4.40
44-1S	5.90	4.35	6.06	6.50	6.60
44-1P	6.00	3.64	6.01	5.50	6.10
44-6S	7.80	5.25	7.20	7.65	7.32
44-6P	6.55	5.30	7.20	7.65	7.16
48-3S	6.40	6.20	6.10	7.10	6.63
48-3P	6.40	6.20	6.10	7.10	6.63

SHELL	PRICE	SHELL	PRICE
3057-3	$.26	3057-12	.33
3057-4	.26	3057-16	.33
3057-6	.26	3057-20	.46
3057-8	.31	3057-24	.69
3057-10	.31		

Reliance Specials

CAPACITORS
POSTAGE STAMP MICAS

MMF	MMF	MMF	MMF	MMF	MFD	MFD
8.2	43	100	250	580	.0013	.0051
10	47	110	300	600	.00136	.006
15	50	120	330	620	.0015	.0062
20	51	125	350	680	.001625	.0065
22	56	130	360	750	.002	.0068
24	60	150	390	800	.0025	.007
25	62	160	400	820	.0026	.0075
30	75	175	430	910	.0027	.008
35	82	180	470	MFD	.003	.0082
39	85	200	500	.001	.0033	.01
40	90	220	510	.0011	.0047	
		240	560	.0012	.005	

Price Schedule

8.2 MMF to .0011 MFD..... 5¢
.0012 MFD to .002 MFD..... 7¢
.0023 MFD to .0082 MFD..... 12¢
.01 MFD..... 15¢

SILVER MICAS

MMF	MMF	MMF	MMF	MMF	MMF	MFD
10	51	120	270	470	815	.00282
18	60	125	325	488	820	.002826
22	62	130	330	500	875	.003
23	68	150	360	510	MFD	.0033
24	68	180	370	525	.001	.0039
30	75	200	390	560	.001625	.005
39	82	208	400	660	.0022	.0051
40	100	225	410	700	.0023	.0056
50	110	240	430	750	.0024	.006
	115	260	446		.0028	.0082

Price Schedule

10MMF to .001MFD..... 10¢
.001625MFD to .0024MFD..... 20¢
.00282MFD to .0082 MFD..... 50¢

OIL FILLED

MFD	V. D. C.	Price
.25	20,000	$15.75
.03	16,000	1.95
(.375@	16,000 and	.80
(.75 @	8,000	5.95
.1	7,500	1.55
.1-.1	7,000	1.55
.01	6,000	.95
.02-.02	9,000	1.25
.02-.02	7,000	1.25
1	6,000	5.25
2	5,000	3.95
2	4,000	2.50
2	3,000	2.15
.25	3,000	1.10
.2	750 AC	.49
8	2,000	3.95
4	2,000	3.65
2	2,500	1.95
1	2,000	.95
8	1,000	$1.35
4	1,000	1.15
3	1,000	.80
2	1,000	.65
1	800	.39
10	600	1.35
8	600	1.15
4	600	.79
2	600	.39

2 mfd 4,000 V.D.C. G.E. SPECIAL **$2.50**

JONES BARRIER STRIPS

Type	Price	Type	Price	Type	Price
2-140Y	$0.10	5-141¾W	.38	2-142	.17
3-140¾W	.15	5-141Y	.38	3-142Y	.23
5-140	.17	7-141	.29	5-142	.36
6-140	.20	7-141¾W	.41	5-142¾W	.37
9-140¾W	.48	7-141¾Y	.47	10-142¾W	.71
10-140¾W	.44	9-141¾W	.52	11-142Y	.78
2-141	.10	9-141Y	.52	2-150	.31
3-141¾W	.19	10-141Y	.58	2-150¾W	.38
3-141W	.19	12-141¾W	.74	3-150	.44
4-141W	.25	17-141Y	.96	4-150	.57
4-141¾W	.28				
5-141	.22				

METERS
Brand New—Guaranteed

0-1 Amp. RF.	2½"	$3.29
0-300 V.D.C.	2½"	3.50
0-60 Amp. D.C.	2½"	2.25
0-7.5 V. A. C.	3½"	3.46

VERNIER DRUM (From BC-221)
0-50 in 180°. Black with silver marks.....85¢

VERNIER DIAL (From BC-221)
2 ⅝" Dia. 0-100 in 360°. Black with silver marks. Has thumblock.....85¢

BLOWER & MOTOR
Blower 2½", motor 27½ V.D.C., 1/100 H.P., 8,500 R.P.M. Continuous duty. Has mounting brackets. Navy inspected.....$3.50

GEAR ASSORTMENT
100 small assorted gears. Most are stainless steel or brass. Experimentors dream!.....Only $6.50

WIRE WOUND PRECISION RESISTORS
1% OR BETTER

¼ WATT—25c

6.68Ω	12.32Ω	16.37Ω	125Ω	414.3Ω
10.45	13.02	62.54	147.5	705
10.84	13.52	79.81	220.5	2193
11.25	13.89	105.8	301.8	59,148
11.74	14.98	123.8	366.6	100,000

½ WATT—25c

.250Ω	1.53Ω	75Ω	260Ω	4,000Ω	8,500Ω
.334	2.04	90	270	4,451	14,825
.444	11.1	97.8	298.3	5,000	15,000
.502	13.15	100	400	5,900	15,750
.557	18.75	125	723.1	6,500	17,000
.627	46	180	2,500	7,000	30,000
.76	52	210	2,850	7,500	37,000
1.01	55.1	235	3,427	8,000	79,012
					100,000

1 WATT—30c

1.01Ω	5.21Ω	270Ω	9,000Ω	55,000Ω
2.58	10.1	3,300	18,000	65,000
3.39	10.9	7,000		

1 WATT—40c

100,000Ω	128,000Ω	320,000Ω	600,000Ω
120,000	130,000	522,000	700,000

1 Megohm—1 Watt 1%—65c; 5%—40c

Orders for 100 precision resistors—10% Discount



FILAMENT TRANSFORMERS
Pri. 115 V., 60 Cyc.—Sec. 5V., 115A. 6000 volt insulation.....$9.95 each

Pri., 115V., 60 Cyc.—Secondary: 6 V. @ 35 A. / 12 V. @ 18 A. / 24 V. @ 9 A. **$5.95**

PULSE TRANSFORMERS
X 124 T2. UTAH, marked 9262, 9340, small gray case. Ratio 1:1:1; hypersil core.....$2.75
D161310. 50 Kc to 4 Mc. 1⅛" dia. x 1⅝" high. 120 to 2350 ohms.....$1.50
382-7178—Spec. 10, 111 Chicago Trans. equivalent to 9262 (above).....$1.50
K58009. Ratio, 1:1:1, 2:1, Freq. range 300 to 520 C.P.S.....$3.50
D106173. W.E. Freq. resp. 10KC to 2 MC.....$9.80
800 KVA G.E. #2731. 38,000 Volt peak output: Bifar: one microsecond pulse width.....$28.50

PRECISION CONTROLS

6 WATT			4 WATT		
20,000Ω	Muter 314A	$1.70	500Ω	Centralab 48-501	$1.00
6,000	De jur 260	1.70	200Ω	GR 301	1.25
6,000	Muter 314A	1.70	20	De jur 292	1.00
5,000	Muter 314A	2.50	12	GR 301	1.10
2,000	De jur 260	1.70	12	De jur 292	1.00
	12 WATT		2]	GR 301	1.25
10,000Ω	De jur 271T	$2.00			
10,000	Muter 471A	2.00			
5,000	De jur 271T	2.00			

PRECISION CAPACITOR—W.E.
D-161270. 1 mfd @ 200 VDC; —40° to +65°C.....$3.50

SELENIUM RECTIFIERS
Full Wave—200 ma., 115 V.....$1.57
Half Wave—100 ma., 115 V..... .72

TIME DELAY RELAY

Raytheon CPX 24166 KS 10193-60 Sec. • 115 V., 60 Cycle • Adj. 50-70 Seconds • 2½ second recycling time—spring return • Micro-switch contact, 10A • Holds ON as long as power is applied • Fully cased • **ONLY**.....**$6.50**

SELSYNS
115 V., 60 Cyc.
#C78248
3½" dia. x 5⅝" long
$8.95 pair

Mounting Brackets — (Bakelite) for selsyns, and differentials shown above.....35¢ pair

DIFFERENTIAL
115 V., 60 Cyc.
#C78249
3½" dia. x 5⅝" long
$2.95 ea.

Used between two #C78248's as dampener. Can be converted to 3600 RPM Motor in 10 minutes. Conversion sheet supplied. (Converted).....$3.50

Get On Our Mailing List! Minimum Orders $3.....All orders f.o.b. PHILA, PA.

RELIANCE MERCHANDIZING CO.

Arch St. Cor. Croskey Phila. 3, Pa. *Telephone RIttenhouse 6-4927*

COAXIAL CABLES
GUARANTEED!! NEW!!

	Ohms	Price per 1,000 ft		Ohms	Price per 1,000 ft
RG-5/U	53.5	$70	RG-29/U*	53.5	$50
RG-6/U	70	150	RG-34/U	71	175
RG-7/U*	97.5	65	RG-35/U	71	450
RG-9/U*	51	135	RG-37/U	53	65
RG-10/U	52	125	RG-39/U	72.5	100
RG-13/U*	74	125	RG-41/U	67.5	550
RG-15/U	76	160	RG-54/U	58	65
RG-18/U	52	450	RG-54/AU	54	75
RG-21/U	53	100	RG-55/U	53.5	65
RG-22/U*	95	110	RG-57/U*	95	100
RG-24/U	125	240	RG-58/U*	53.5	55
RG-25/U	48	575	RG-74/U	52	250
RG-26/U	48	75	RG-77/U*	48	100
RG-27/U	48	290	RG-78/U	48	80
RG-28/U		160			

*No minimum order—others 250' minimum
Add 25% for orders less than 1,000 feet

COAXIAL CABLE CONNECTORS

Angle Adapter 15¢	Plug 40¢	Socket 35¢	Hood 5¢
M-359	PL-259A	SO-239	83-1H
83-1AP	83-1SPN	83-1R	

Adapter for PL-259 A for use on small coax, 12c each.....$10.00 per 100

83-1AC	$0.42	UG-19/U	.73	UG-85/U	.85
83-1F	1.12	UG-21/U	.67	UG-87/U	.79
83-1J	.80	UG-22/U	1.10	UG-103/U	.48
83-1SP	.45	UG-23/U	.85	UG-104/U	.85
83-1T	1.12	UG-24/U	.67	UG-107/U	2.00
83-22AP	1.10	UG-25/U	.60	UG-171/U	1.33
83-22F	1.48	UG-27/U	.68	UG-173/U	1.15
83-22R	.48	UG-29/U	.83	UG-176/U	.15
83-16S	.15	UG-30/U	1.20	UG-197/U	1.33
83-18S	.15	UG-33/U	14.80	UG-206/U	.45
UG-7/AP	2.14	UG-34/U	16.00	UG-255/U	1.22
UG-12/U	.63	UG-36/U	12.00	UG-264/U	1.74
UG-13/U	.63	UG-37/U	12.80	UG-281/U	.60
UG-18/U	.63	UG-58/U	.63		

SOUND POWERED HANDSET
Brand New!
Includes 6 ft. cord. No batteries or external power source used.
$6.62 ea.....$17.00 pr.

CERAMICONS

2 MMF	30 MMF
5.6	35
10	39
12	45
15	62
20	82
22	150
	200

$6.50 per hundred

500 VOLT CERAMIC CONDENSERS

MMF	MMF	MMF	MMF
2	18	56	150
3.44	22	62	180
4.7	27	68	200
8	30	82	220
12	33	91	270
15	40	100	300
16	47	140	1000

$5.50 per hundred

2J1G1 SELSYNS
BRAND NEW
400 Cycle
Can be used on 60 cycle
$1.85

3AG FUSES

AMP	Per 100	AMP	Per 100	AM P	Per 100
½	$4.00	1	$3.00	5	$3.00
¾	4.00	1½	3.00	10	3.00
⅞	4.00	2	3.00	15	3.00
¼	4.00	3	3.00	20	3.00

Fuse Holder—for 3AG Fuse. (Littlefuse or Buss)...25¢

4AG FUSES

AMP	Per 100	AMP	Per 100	AMP	Per 100
1/10	$4.00	2	$2.00	10	$2.50
1/4	3.50	3	2.00	15	2.50
1/2	3.50	3.2	2.00	20	2.50
1	2.00	5	2.00	25	2.50
				30	2.50

Fuse Holder—for 4AG Fuse. (Littlefuse or Buss)...18¢

Wrapped—BALL BEARINGS—New

Mfg	ID	OD	Width	Price
Fafnir 33K5	1/16"	1/2"	5/32"	$0.25
MRC .205R	63/64"	2 3/64"	19/32"	1.10
N.D 5202C13M	1"2"	1 3/8"	1/8"	1.00
Fafnir 7308W	1 37/64"	3 9/16"	5/16"	2.00
SKF4664430	6"	8"	1"	5.00
TIMKEN	4 5/16"	6 1/4"	29/32"	4.25

NEEDLE BEARINGS

B198 1/2" wide	5/8"	13/16"	38¢
GB34X 1/4" wide	3/16"	11/32"	25¢

ALLEN SET SCREWS

4-40 x 1/8	8-32 x 1/8	8-32 x 5/16
4-40 x 3/16		8-32 x 3/8
ALL SIZES		$1.50 per 100

HAYDON TIMING MOTOR
4 R.P.M., 115 V., 60 Cycle.....$1.79

DELAY NETWORK—ALL 1400Ω
T 113—Approx. 1.3 micro sec. delay.....85¢
T 114—Approx. 2.2 micro. sec. delay.....85¢
T 115—Similar to T 114 with tap brought out.....85¢

CHOKES
30 Hy., 8 ma.....$1.25
6 Hy., 8 ma.....75

1000 KC crystal BT cut	$3.95
3" scope shield	1.29
2 speed dial drive for ¼" shaft ratios 5:1 1 to 1	.39
ATC 100 mmfd air trimmer screwdriver shaft	.29
Sigma Sens. Relay 8000 ohms	1.98
Centralab 850 S 50MMF 5KV BUTTON COND.	.39
500 watt 12.5 ohm power rheostat	3.49

R·H·S
SPECIALS OF THE MONTH

50 mmfd 5 KV vacuum condenser	$1.49
6v, 12v vibrators any type	.98
Rotary switch Mycalex, 2 deck 5P2T	.39
1 mfd 5000v oil condenser	2.98
2 mfd 3000v oil condenser	3.25
3 mfd 4000v oil condenser	3.95
24 mfd 1500v DC 3KV flash. Excellent for speed lamp	3.95

TUBES!! BRAND NEW! STANDARD BRANDS! NO SECONDS! COMPARE! TUBES!!

0A3/VR75	$1.29	3C23	$ 9.98	204A	$49.50	809	$ 2.48	8012	$ 3.98	0A2		5Z4		6SN7GT		12SJ7	
0B3/VR90	1.29	3C24/24G	9.98	211	9.98	810	9.98	8013	2.98	0A4G		6A3		6SQ7		12SK7	
0C3/VR105	1.49	3C30	2.98	212E	49.50	811	2.98	8014	29.95	0B2		6A4LA		6SR7GT		12SL7	
0D3/VR150	1.29	3C45	3.49	215P	.19	812	2.98	8020	1.29	0C3		6A6		6SS7		12SN7	
1B22	3.45	3C45	12.75	217C	8.98	812H	6.90	8025	5.98	01A		6A7		6ST7		12SQ7	
1B23	12.90	3CP1	2.28	227A/5C27	5.95	813	6.95	9001	2.25	1A3		6A8		6SU7GTY		12SR7	
1B24	4.95	3CP1-81	2.98	240E	3.95	814	4.98	9002	1.49	1A4P		6AB7		6T7G		12Z3	
1B26	2.95	3DP1	4.98	250R	12.95	815	2.95	9003	1.49	1A5GT		6AC5GT		6T7G		14A4	
1B27	24.50	3DP1A	4.98	250TH	21.95	826	1.19	9004	1.49	1A6		6AC7		6T8		14A7	
1B29	2.75	3DP1-82A	6.98	250TL	21.50	828	.98	9005	2.26	1A7GT		6AG7G		6U5G		14B6	
1B32	6.98	3DP21A	6.98	274A	5.50	829	12.75	9006	.29	1A8G		6AK5G		6U6GT		14F7	
1B35	24.98	3EP29	14.98	274B	2.68	829B	13.95	C1A	9.95	1B3/8016		6AF6G		6U7G		14F8	
1B38	32.50	3EP1	9.98	276A	9.95	830B	14.95	C3A	9.95	1B4		6AG5		6V6		14H7	
1N21 Xtal	2.95	3FP1	3.98	276B	9.95	832	6.98	C6A	7.98	1B5/25S		6AG7		6V6GT		14J7	
1N21A Xtal	2.25	3GP1	4.75	294A	8.75	832	9.98	C6J	8.98	1B7GT		6AH6		8W4		14N7	
1N21B Xtal	3.25	3HP1	9.98	303B	9.98	832A	14.95	C8D	9.98	1C6GT		6AJ5		6W7G		14S7	
1N22 Xtal	1.35	4-65A	14.21	304TH	27.50	833A	37.50	CK502AX	2.98	1C6		6AK5		6X4		14R7	
1N23 Xtal	2.28	4-125A	26.95	304TL	23.95	836A	3.95	CK503AX	2.25	1C7G		6AK5GT		6X5GT		19	
1N23A Xtal	3.25	4-250A	39.95	305A	34.98	837	2.95	CK504AX	2.25	1D5GP		6AK6		6X8G		24A	
1N23B Xtal	4.95	4AP10	4.95	307A/RK75	5.95	838	2.98	CK505AX	2.25	1D7G		6AL5		6Y6G		25L6GT	
1N27	3.49	4B32/ELSB	6.95	310A	4.98	841	.98	CK506AX	2.25	1E5GP		6AQ5		6Z7G		25Z5	
1N34	1.08	4B24/EL3C	7.95	316A	.65	843	.39	CK512AX	2.25	1E5GT		6AR5		6ZY5G		25Z6GT	
1N34A	1.98	4B25/6CF	8.95	323A/B	24.50	845	4.98	CK513AX	2.25	1E7G		6AT6/3XL		6Z9		26	
1P25	3.98	4B26/2000	6.98	327A/5C27	4.95	849	29.50	CK1005	.89	1F4		6AU6		7A8		28D7	
1P24	1.79	4B28	2.98	328A	12.95	851	69.50	CK1006	.89	1F5G		6AV6		7A7		30	
1P26	2.98	4B27	9.98	331A	12.98	852	69.50	E1148	.25	1G4GT		6AW6		7A5		31	
1R21	6.95	4C27/		350A	8.98	860	6.98	EF50	.69	1G6GT		6B6G		7AQ7		32	
2AP1	6.95	CV92	49.50	350B	9.98	861	29.95	F123A	8.75	1H4G		6B7		7AU7		32L7GT	
2AP5	9.95	4C35	29.50	368AS	7.98	864	.39	F127A	29.50	1H5GT		6B8G		7B4		33	
2C21/RK31	4.98	4D22	11.45	371A	1.49	865	1.49	F128A	89.50	1H6GT		6BA6		7B5		34	
2C22/7193	.49	4D32	14.98	371B	.98	866A	1.39	F808	37.50	1J6GT		6BE6		7B6		35/51	
2C26A	.49	4E27/		388A	2.75	866JR	1.29	FG17	3.98	1L4		6BF6		7B7		35A5	
2C34/RK34	4.98	257B	17.95	393A	5.98	869B	38.50	FG27A	3.98	1L4A		6BG6G		7C4		35B5	
2C39	24.50	5AP1	2.89	394A	4.98	872A	2.49	FG32	7.98	1L6		6BH6		7C5		35C5	
2C40	4.98	5BP1	9.98	417A	12.50	874	1.49	FG57	14.95	1LA4		6BJ6		7C6		35L6GT	
2C43	14.95	5BP1	9.98	434A	4.95	876	.98	FG81A	3.98	1LC5		6C4		7C7		35W4	
2C44	7.50	5BP4	9.98	446A	4.98	878	2.98	FG105	8.95	1LC6		6C5		7E6		35Y4	
2C46	7.50	5CP1	4.98	446B	1.79	884	1.49	FG117	29.50	1LD5		6C6		7E8		35Z3	
2C51	9.75	5C22	49.65	450TH	44.50	885	1.49	FG146	8.95	1LE3		6C6G		7E7		35Z4	
2E22	1.98	5D21	24.50	527	12.75	905	2.98	FG154A	8.95	1LE5		6C8G		7F7		35Z5	
2E24	4.89	5D22	24.50	558	1.95	908	7.98	FG451	.89	1LH4		6D6		7F8		36	
2E26	3.89	5GP1	4.98	562	97.50	918	1.69	FG504	14.95	1LN5		6F5		7H7		37	
2E30	5.98	5JP1	14.98	575A	19.98	919	2.79	GL502	97.50	1N5GT		6F6		7J7		38	
2E31 A	9.98	5JP4	24.49	701A	8.95	922	.98	GL505	14.95	1P5GT		6F6G		7N7		39/44	
2J22	8.45	5JP7	24.49	703A	8.95	923	1.09	GL516	14.95	1R4		6F6GT		7Q7		41	
2J26	29.50	5J29	12.95	703A	7.98	927	1.95	HF100	19.95	1R5		6F8G		7S7		42	
2J27	29.50	5J30	49.50	704A	1.95	930	1.95	HY115	.79	1S4		6G6G		7V7		43	
2J30	39.50	5LP1	4.98	705A	9.98	931A	4.95	HY615	.79	1S5		6H6		7W7		45	
2J31	39.50	5LP1	13.95	706BY	39.50	954	.39	KC4	37.50	1T4		6H6GT		7X7		45Z3	
2J32	39.50	5RP1	6.98	706CY	39.50	955	.49	KU610	6.50	1T5GT		6J5		7Y4		45Z5	
2J33	39.50	6AS6	3.00	706EY	42.50	956	.45	ML101	6.50	1U4		6J5GT		7Z4		46	
2J34	39.50	6B4	2.98	706GY	42.50	957	.45	RK1.21	3.35	1U5		6J6		12A		47	
2J36	97.50	6J4	5.98	707B	17.98	958	.45	RK20	4.49	2A3		6J7		12A6		48	
2J37	12.75	6J4	5.98	708A	6.98	959	.45	RK23	4.49	2A5		6J7GT		12A7		50A5	
2J38	7.98	7BP7	12.75	709	4.98	991 (NE16	.25	RK34	2.49	2A7		6K5GT		12AH7GT		50B5	
2J39	39.50	9GP7	14.98	710A/8011	1.75	1603	3.25	RK38	.89	2A6		6K6GT		12AL5		50C5	
2J40	39.50	9JP7	14.95	715A	24.95	1613	2.25	RK48A	4.49	2A7		6K7		12AT6		50L6GT	
2J41	39.50	9LP1	19.95	714AY	9.95	1614	1.98	RK59	1.49	2B7		6K8		12AT7		50Y6	
2J48	29.50	9LP7	14.98	715A	.98	1616	.98	RK60/1641	.98	3V4G		6L5G		12AU6		53	
2J49	39.50	10BP4	16.98	715B	12.95	1619	.29	RK61	24.50	2X2		6L6		12AT6		56	
2J50	22.50	7DP4	17.98	715C	24.50	1622	1.98	RR72	.59	2X2A		6L6G		12AT7		57	
2J54B	39.50	7179	.49	717A	1.98	1623	1.98	RR73	.59	3A4		6L6GA		12AU6		58	
2J55	97.50	12DP7	16.98	721A	2.59	1625	.45	RX21A	2.95	3A5		6L7		12AU7		59	
2J61	49.50	12FP7	16.98	722A	4.98	1626	.45	RX120	2.95	3A8		6L7G		12AV6		70L7	
2J62	49.50	12HP7	16.98	723A	9.95	1629	.25	V70D	.95	3B7/1291		6N7		12BA6		71A	
2K25/		12P4	22.50	724B/B	14.95	1630	.25	VR75	.49	3D6/1299		6Q7		12BE6		75	
724AB	24.95	15E	1.19	724B	3.89	1631	1.29	VR91	1.49	3LF4		6R7		12BH7		76	
2K28	39.50	15R	.89	725A	7.95	1632	.79	VR92	.98	3Q4		6S7G		12F5GT		77	
2K30	264.50	15AP4	42.50	726A	6.49	1633	.79	VT127A	3.98	3Q5GT		6S8GT		12H6		78	
3AP1	9.95	16CP4	42.50	726B	29.50	1634	.75	VT158	14.95	3S4		6SA7		12J5GT		80	
3B22/		17E	1.29	730A	19.95	1635	2.25	VT501	2.95	3V4		6SC7		12J7GT		82	
ELIC	2.95	21D4	.45	750TL	79.50	1638	.65	VU111	1.49	5R4GY		6SH7GT		12K7GT		83	
3B22/		21MP7	.98	803	1.98	1644	.98	WL408	12.95	5T4		6SP5		12K8		83V	
3B28	4.85	30 Special	.89	804	1.98	1654	2.39	WL417	12.75	5U4G		6SP5GT		12Q7		84/6Z4	
3B24W	9.95	35TG	4.98	801A	.49	1665	1.45	WL531	12.75	5V4G		6SQ7		12SA7GT		85	
3B24W	7.98	35 Special	89Z		4.49	1851	1.98	WL532	2.95	5Y3		6S7		12SC7		87	
3B25	4.65	53A	8.95	805	4.49	1960	.79	WL579	14.95	5W4		6S7		12SF5		117L7/M7	
3B26	3.95	75TL	8.95	806	4.49	1961	4.98	WL578	14.95	5X4G		6SH7		12SP5		117N7	
3B27	3.95	100R	.89	805	4.49	2050	1.25	WL616	37.50	5Y3GT		6SJ7		12SP7		117P7	
3B28	8.98	100TH	9.98	806	29.50	2051	.65	WL617	18.95	5Y3GT		6SK7		12SQ7		117Z3	
3BP1	8.95	121A	2.98	807	1.98	8003	9.95	WL677	34.50	5Y4G		6SL7GT		12SH7		117Z6	
3C22	64.50	203A	8.95	808	4.49	8011	1.75	WL681	22.50	5Z3							

DUE TO CURRENT NATIONAL EMERGENCY AND THE CRITICAL RECEIVING TUBE SHORTAGE, TUBES WILL BE SHIPPED AT PREVAILING PRICES. WE WILL QUOTE ON LARGE OR SMALL QUANTITIES.

DUE TO CURRENT NATIONAL EMERGENCY AND THE CRITICAL RECEIVING TUBE SHORTAGE, TUBES WILL BE SHIPPED AT PREVAILING PRICES. WE WILL QUOTE ON LARGE OR SMALL QUANTITIES.

DUE TO CURRENT NATIONAL EMERGENCY AND THE CRITICAL RECEIVING TUBE SHORTAGE, TUBES WILL BE SHIPPED AT PREVAILING PRICES. WE WILL QUOTE ON LARGE OR SMALL QUANTITIES.

DUE TO CURRENT NATIONAL EMERGENCY AND THE CRITICAL RECEIVING TUBE SHORTAGE, TUBES WILL BE SHIPPED AT PREVAILING PRICES. WE WILL QUOTE ON LARGE OR SMALL QUANTITIES.

SELENIUM RECTIFIERS
FULL WAVE BRIDGE TYPE

Input 0-20V AC Type No.	Current	Output 0-14.5V DC Price
20D1	1.2 Amps.	$ 2.49
20E1	2.4 Amps.	3.49
20F1	6.4 Amps.	4.98
20K1	13.0 Amps.	7.98
20J1	17.5 Amps.	11.95
20K2	26.0 Amps.	17.95
20K3	39.0 Amps.	24.98
20K4	52.0 Amps.	29.98
20K5	65.0 Amps.	38.98

0-40v AC	Current	0-34v DC
40D1	.6 Amps.	$ 2.98
40E1	1.2 Amps.	3.98
40F1	3.3 Amps.	5.25
40K1	6.0 Amps.	9.98
40J1	9.0 Amps.	12.95
40K2	12.0 Amps.	18.98
40J2	18.0 Amps.	22.98
40K4	24.0 Amps.	32.50
40K5	30.0 Amps.	34.98
40J4	36.0 Amps.	39.50

0-120v AC	Current	0-100v DC
40D1A	.6 Amps.	$ 7.98
40E1A	1.2 Amps.	10.75
40F1A	3.3 Amps.	14.65
40K1A	6.0 Amps.	24.75
40J1A	9.0 Amps.	32.98

CENTER TAPPED RECTIFIERS
Single Phase Full Wave Bridge

50-0-10v AC	Current	0-8v DC
10D1	1.2 Amps.	$ 1.89
10E1	2.4 Amps.	2.25
10F1	6.4 Amps.	3.87
10K1	12.0 Amps.	4.98
10J1	16.0 Amps.	7.95
10K2	24.0 Amps.	10.75
10K3	36.0 Amps.	14.75
10K4	48.0 Amps.	17.75
10K5	60.0 Amps.	19.98
10K6	72.0 Amps.	22.98
10K7	84.0 Amps.	27.95
10J6	96.0 Amps.	32.50
10K8	120.0 Amps.	42.50

Let us bid on your special selenium rectifier wants in any quantity

TRANSFORMERS—115V 60 CY
HI-VOLTAGE INSULATION

2700v @ 2 MA; 6.3v @ .6A; 2.5v @ 1.75A	$ 4.45
2500v @ 15 MA	3.49
1600v @ 4 MA; 350-0-350v @ 150 MA; 6.3v @ 8A	4.45
1540v @ 5 MA; 340-0340v @ 300 MA	4.35
1120-0-1120v @ 500 MA; 12v CT @ 14A; 2.5v @ 10A; 17v @ 2.5A; 32v @ 23 MA; 115/230 Pri	16.95
925v @ 10 MA; 525-0-525v @ 60 MA; 2X5v @ 3A; 6.3v CT @ 3.6A; 6.3v @ 2A; 6.3v @ 1A	4.85
700-0-700v @ 300 MA	6.49
500-0-500v @ 175 MA	4.98
430-0-430v @ 340 MA; 6.3v CT @ 6.3A; 5v @ 6A	4.65
425-0-425v @ 75 MA; 6.3v @ 1.5A; 5v @ 3A	3.85
415-0-415v @ 60 MA; 5v CT @ 2A; 115/230 Dual Pri	4.25
405-0-405v @ 150 MA; 6.3v CT @ 2.5A; 5v @ 2A; 2.5v CT @ 7A	4.35
400-315-0-100-315v @ 200 MA; 2x6.3v @ 9A; 5v @ 3A; 2.5v @ 2A	5.35
500-38-0-385v @ 200 MA; 3x6.3v @ 6A; 5v @ 3A; 2.5v @ 2A	4.75
377-0-377 @ 175 MA, 5v @ 3A, 6.3v @ 5A, 7½ v @ 1A	3.79
323-0-125v @ 3/4 MA; 253-0-235v @ 240 MA	4.35
300-0-300v @ 65 MA; 6.3v @ 2.5A; 6.3v @ 1A; 2x3v @ 2A	3.28
80-0-80v @ 225 MA; 5v @ 2A; 5v @ 4A	2.87
0-17.4/21.6/25.8v @ 400 MA; 6.4v @ .5A; 2.6v CT @ 2.5A Pri 115/230	.98
13.5v CT @ 3.25A	3.95
12.6v CT @ 10A; 11v CT @ 6.5A	2.17
3x10.3v CT @ 7A; 5v @ 3A	6.38
6.5v @ 12A; 6.3v @ 2A; 115v @ 1A	.99
6.3v @ 8A; 6.3v @ 6A; 2.5v @ 4.75A	3.50
6.3v @ 1A; 2.5v @ 2A	4.17
6.3v CT @ 3.5A; 2.5v CT @ 3A	.97
5v CT @ 20A; 10 KV INS	2.97
.6v @ 15A RMS	8.95
	1.47

TRANSFORMERS—220v 60 Cyc

812.5-0-512.5 @ 427 MA	$ 9.38
385v @ 9A; 4v @ 25A	2.95
2x6.3v CT @ 3A; 6.3v CT @ 1.6A	2.95
10v CT @ 6.5A; 6.3v CT @ 2.5A; 6.3v CT @ 1.8A 220/440 Pri	2.95
Step Up Down 110/220, 500 watt	10.98
Step Up/Down 110/220, 220/440 600 watt	14.95

EQUIPMENT SPECIALS

ATR Inverter 12v DC in 110v AC Out 125 w Int. 100 w Cont.	New	$14.95
AN/CRW-2 UHF Receiver Less Tubes	New	9.98
BC433 Receiver	Good	24.94
BC456 Modulator	Good	1.98
BC434A Control Box/BC433	Used	1.95
BC459 Transmitter	Good	10.95
BC778 Gibson Girl	Good	2.95
BC950A-121 Xmitter 100-156 MC	New	99.50
BC1016 Tape Recorder	New	499.50
BC1206B Beacon Receiver, Less Tubes	Good	3.95
CF1 Navy Unit w/200KC Crystal	New	14.95
DM 19 Dynamotor 12v DC in 500v 200 MA Cont. Out	Good	6.95
MN26C Compass Receiver	Good	24.95
M110 Dynamic Chest Mike	New	2.95
PE94 Dynamotor/SCR522	Good	1.98
PE97A Vibrator Power Supply	New	6.95
PE103 Dynamotor	Like New	29.95
RS9/ARN5 Receiver Less Tubes, Covers	Good	14.95
SCR518 Altimeter Complete	New	97.50
T17 Carbon Mike	Used	1.98

FILTER CHOKES HI V INS

.025 HY @ 1.36A	$1.98	10 HY @ 250 MA	$3.15
.05 HY @ 15A	7.95	10/20 HY @ 85 MA	1.49
.065 HY @ 5A	2.49	12 HY @ 150 MA	1.95
.1 HY @ 15A	8.95	13 HY @ 250 MA	2.95
2 HY @ 175 MA	1.49	14/3.5 HY @ 40/ 400 MA	6.95
3 HY @ 50 MA	13.95	15 HY @ 25 MA	.99
5 HY @ 1A	7.95	15 HY @ 70 MA	1.15
5 HY @ 70 MA/2 HY 350 MA Dual	2.39	20.5 HY 125 MA	1.98
10 HY @ 700 MA	11.95	200 HY @ 10 MA	2.95
10 HY @ 55 MA	2.98	325 HY @ 2 MA	2.95
10 HY @ 100 MA	1.49	600 HY @ 1 MA	2.95

RADIO HAM SHACK Inc.
189 GREENWICH STREET . NEW YORK, N. Y.

PHONE DIGBY 9-0347
WRITE FOR QUANTITY PRICES
Prices subject to change without notice. F.O.B. NYC, minimum order $10.00, 20% deposit required. All merchandise guaranteed.

IMMEDIATE DELIVERY • LOW PRICES • FULLY GUARANTEED

BROWN TELEPLOTTER RECEIVER



Model 791X1R

115 volt 60 cycles

Contains a pen driven by two balancing motors which writes on rear of a translucent chart. Pen arm position is in terms of two coordinates supplied balancing motors thru two amplifiers. Originally intended for recording plotted or written data from central plotting board. Writes at one half scale on 18 in. chart. Discriminator input circuit designed to operate unit as function of two varying R.F. frequencies varying about mean of approx. 430 KC. Further data on request. (Shipping weight 435 lbs.)

Price $375.00

Aircraft Generator Eclipse NEA-3

Output 115 VAC; 10.4 amps 800 cycles at 2400 rpm. Also 30 VDC at 6 amps. Stock #SA-306. Price $39.50 each.

400 Cycle Generator

G. E. 5ASB31JJ3. 400 cycles out at 115 volts 7.2 amps. Ideal for lab. 6" lg. x 6" diam. 8000 rpm. Stock #SA-292. Price $79.50 ea.

A-5 Autopilot Indicator

Autosyn Type Pilot Indicator for A-5 Autopilot. 26 v. 400 cycles. Stock #SA-299. Price $12.50 each.

Pioneer Servo Motor

Type 10047-2A. 2 ϕ 400 cycle low inertia. 26 v fixed phase. 115 v. max. variable phase. Stock #SA-90. Price $12.50 each.

PRECISION AUTOSYN

Pioneer Type AY-180 Control Autosyn. Precision type. 26 v. 400 cycle. Stock #SA-297. Special low price $14.50 each.

SYNCHROS

Navy Types

1G, 1CT, 5G, 5CT, 5DG, 5HCT, 5SF, 5HSF, 5SDG, 6DG, 7G, etc.

Prices on Request

Prices F.O.B. Paterson
Phone ARmory 4-3366
WRITE FOR LISTING

Compass Indicator

I-82F Compass Indicator. 0-360°-5 in. dial. 26 v. 400 cy. 8-12 v. 60 cy. Ideal position indicator. Stock #SA-284. **Price $6.50 each**

SWEEP GENERATOR CAPACITOR

Hi-speed bearings. Split stator. Silver-plated coaxial type. 5-10 mmf.

Stock #SA-167 **Price $2.75 each**

ALSO IN STOCK

C-1 AUTOPILOT COMPONENTS
A-5 AUTOPILOT GYROS
GENERAL ELECTRIC D-C SELSYNS
AC and DC RATE GENERATORS

400 CYCLE AC BLOWERS

E. A. D. J-151—115 v. 400 cy. 22 c.f.m.
Westinghouse Type FL—115 v. 400 cy. 17 c.f.m.

DC MOTORS

Haydon-6006, ⅛ rpm. 29 v. d-c, 100 ma.
Deico 6009625—120 rpm. Gov. cont. 27 v.
General Electric 5BA50LJ66—⅓ hp. 27 v. field. Arm. v. 60. Amplidyne controlled.
Deico-A-7155—1/30 hp. 3600 rpm. Gov. cont.
W. E. KS-5603-LO2—1/100 hp. 4 lead shunt.
National Mineral—30600. 1 hp. Int. duty. Fan cooled.
Diehl FDE-53-5—3600 rpm. Gov. cont. 1/30 hp.
G. E. 5BA35MJ400—24 v. 7500 rpm. Cont. duty.
Airsearch—Actuator—25800-24. 2" travel.
Barber Colman—Actuator—YLc-2066-2. 200 in/lb. 125 degrees in 45 seconds.
Airsearch—**Actuator (Manual Flap) 25090.**
Airsearch—**Actuator**—**(Automatic Flap) 25040.**
Holtzer Cabot—**RBD-2220**—⅓ hp. 27 v. 3600 rpm.
Arma Latitude Meter — 8413-30 (Step motor)
Elinco B-64—1/165 hp. 3100 rpm. 27 v. f. 80 v. armature. (Thyratron control)
John Oster—**A-21E-12R**—Split field series reversible. 23 v. 0.4 amps. 3 watts output.
General Electric 5FS56HC18 — Split field series rev. 60 v. 1.4 A. 5500 rpm.

AC SERVO MOTORS

Kollsman—**776-01**—400 cy. 2 ϕ drag cup type.
Diehl FP-23-3—2 ϕ 60 cy. 20 v. 2.5 watts out.
Pioneer CK-2—2 ϕ 400 cy. 1.05 in/oz. stall.
Pioneer CK-17—2 ϕ 400 cy.
Minneapolis Honeywell G30SAT2CA4. Built in gear reduction. 3ϕ 400 cy.

AUTOSYNS (Pioneer)

B-9A—**Dual Oil Pressure Indicator (6007-4F-7A)**
B-8A—**Oil Pressure Transmitter, (4150-3B1)**
Pioneer Types—**AY-1, AY-14, AY-54, 2220,** etc.
C-14A—**Fuel Pressure Transmitter.**
Pioneer I-81A and I-82A Compass Indicators.

Subfractional Horsepower AC Motors

Eastern Air Devices-J-72B—115 v. 400 cy. 1/50 hp. Cont. duty. 4700 rpm.
E. A. D. J-40B—115 v. 400 cy. 1/250 hp.
E. A. D. J-35—115 v. 3ϕ 400 cy. Int. duty.
Diehl FBF-24-1—115 v. 400 cy. 1/100 hp.
Synchron-600—110 v. 60cy. 1 rpm.
Haydon 36723—115 v. 60 cy. 1 rpm.

MAGNESYNS

Pioneer Type CL-3, 6 power.
Pioneer 1000-1E-B1 Indicator. AN-5730-2.

INVERTERS



Wincharger PU-7/AP Input 28 VDC at 100 amps. Output 115 v. 400 cy. 1 ϕ at 2500 VA. Voltage and frequency regulated. Cont. duty. Stock #SA-164. Price $99.50 each.

G.E. 5AS1S1NJ8 (PE-115) Input 28 VDC at 100 amps. Output 115 v. 400 cy. 1 ϕ at 1500 VA. PF 0.8 W.E. Spec. KS-6401L1. Stock #SA-116. Price $79.50 ea.

PE-218B Inverters Russel Electric and Leland. Input 28 VDC at 92 amp. Output 115 v. 400 cycles at 1500 VA. PF 0.8. Stock #SA-113A. Price $49.50 each.

Pioneer 12130-4-B Input 28 VDC at 14 amps. Output 120 v. 400 cy. Single Phase at 1.15 amps. (140 VA.) Voltage and frequency regulated. Made 1949. Stock #SA-304. Price $39.50 each.

JACK AND HEINTZ STARTER



Dwg.6-950-E Aircraft engine starter. 28 VDC. Stock #SA-305. Price $19.50 each

DC SERVO MOTOR

Elinco Type B-64. 1/165 hp at 3100 rpm. Field volts 27.5 Max. armature voltage 80. Ideal for thyratron servo control. Stock #SA-211. Price $12.50 each.

MAGNETIC AMPLIFIER ASSEMBLY

Sperry 661824. Saturable reactor type output transformer. Designed to supply one phase of 400 cycle servo motor. Stock #SA-206. Price $6.75 each

FORD INS'T SERVO MOTOR

115 volt 60 cycle two phase low inertia motor. 15 watts output. BuOrd. 307937. Stock #SA-291. Price $49.50 each.

Servo-Tek products co.
4 Godwin Ave. Paterson, N. J.

SPECIALISTS IN FRACTIONAL HORSE POWER MOTOR SPEED CONTROL

MICROWAVE RECEIVERS

AN/APR-1 Receivers and tuning units TN-1 (38 to 95 MC) TN-2 (76-300 MC) TN-3 (300-1000 MC)
AN/APR-4 Receivers and tuning units TN-16 (38-95 MC) TN-17 (76-300 MC) TN-18 (300-1000MC)
AN/APR-5A Receivers. 1000 to 4000 MC Range.

U. S. NAVY SOUND POWERED BATTLE PHONES

Western Electric No. D173312, Type O. Combination headset and chest microphone. Brand new including 30 ft. of rubber covered cable.....$17.50

Automatic Elec. Co. No. GL843AO. Similar to above but including Throat microphone in addition to chest microphone. Brand new with 30 ft. rubber covered cable $13.50

U. S. Instrument Co. Navy Type M. Dr. No. A-260 ALT. 1. Complete with 20' cable and navy plug. Brand new $17.50

G. E. SERVO AMPLIFIER

Type 2CV1C1 Aircraft Amplidyne control amplifier, 115 volts—400 cycles. Dual channel. Employs 2-6SN7GT and 4-6V6GT tubes. Supplied less tubes. New $22.50

400 CYCLE TRANSFORMERS

AUTO. 400 cy. G.E. Cat No. 80G184 KVA .9459—.630P. Volts 460/345/330/115. New $4.95

FILAMENT. 400/2600 cy. Input: 0/75/90/85/105/115/125V. Output: 5V3A/5V3A/5V3A/5V2A/5V6A/5V6A/6.3V6A/6.35A. New $2.95

THYRATRON POWER. 400/1600 cy. Raytheon UX-5876. 400/1600 cy. Pri: 115. Sec: 50-0-50V at 0.8A, 6.3V at 1.2A. Test r.m.s. 1780. New....$2.75

PLATE WECO KS9540. 400/800 cy. Pri: 115V. Sec: 1350-0-1350 at .057A (3700 V Total). Electat shided. Wt. 2.3 lbs. New $2.95

SCOPE PL. & FIL. WECO 9556. 400/2400 cy. Pri: 115. M.V. Wdg. 1125V at .008A. Fil. Wdgs. 6.4V4A/2.5V1.75A/6.4V.6A. Electat shided. Wt. 1.4 lbs. New $2.75

FILAMENT. 400/2400 cps. WECO KS9553. Pri: 115V. Sec: 8.2V1.35A/6.35V1.5A Electat shided. Wt. 0.5 lbs. New $1.95

PLATE & FIL. 400/2600 cy. Pri: 0/80/115V. Sec #1=1200VDC at 1.5MA. Sec #2=400VDC at 120MA. Fil. Secs: 6.4V4.5A/6.35V0.8A. (ins. 1500V)/5V2A/5V2A. $4.95

RETARD. 400 cy. WECO KS9593. 6 Henry 100MA $1.75

60 CYCLE TRANSFORMERS

80KVA STEPDOWN. Standard Trans Corp. trans type MD. Pri: 460V111A. Sec: 117V457A. Navy type. Ambient temp. 50 Deg. C. $125.00

FILAMENT. Raytheon Hypersil Core. Pri: 115V. Sec: 6.3V22A/6.3V2.4A/6.3V2.25A/6.3V0.6A Ins. for 1700V $5.95

Plate. Thordarson #T46289. 1250 VA. Pri: 105-115V. 60 cy. 1 PH. Sec: 5600V. Center tapped. 7.5KV insulation. Brand new.....$49.50

High Resistance Trans. G. E. type Y-2502A.—60 cy.; Voltage 11200-135. Inductance H.V. Winding 135 Henries. Output Peak Voltage 22.5KV. Cat. #21D06501. New $89.50

PULSE TRANSFORMERS

PULSE. WECO KS-9563. Supplies voltage peaks of 2500V from 807 tube. Tested at 2000 Pulses/sec and 8000V peak. Wdg. 1-2=18 ohms. Wdg. 1-3=72 ohms. L of Wdg. 1-3= .075-.085H at 100 cps.....$5.50

PULSE. WECO KS-161310, 50 KC, to 4MC. 1⅝" Dia. x 1⅝" high. 120 to 2350 ohms. New.....$3.95

HIGH VOLTAGE CAPACITORS

.25 MFD., 20KV.....$17.75
.25 MFD., 15KV.....15.75
.5 MFD., 25KV.....$28.50
1 MFD., 15KV.....$18.50
1 MFD., 7.5KV.....$ 7.95

All brand new. Made by prominent manufacturers.

MODEL AN/APA-10 PANORAMIC ADAPTER



Provides 4 Types of Presentations:
(1) Panoramic (2) Aural
(3) Oscillographic (4) Oscilloscopic

Designed for use with receiving equipment AN/ARR-7, AN/ARR-5, AN/APR-4, SCR-587 or any receiver with I. F. of 455kc, 5.2mc, or 30mc.

SUMMARY OF CHARACTERISTICS:

SENSITIVITY: "A" channel, 400 microvolts or less per ¼" beam deflection. "B" channel, 400 microvolts or less per ¼" beam deflection. "C" channel, 1 volt or less per ¼" beam deflection.

RESOLUTION: 12 kilocycles at 3 db down from peak, sweep control at maximum, using CW signal.

PRESENTATION: Panoramic ("A" & "B" channels); Oscillographic, "C" channel.

SWEEP WIDTH: Channel A, ± 50kc (100 kc overall) Channel B, ± 500 kc (1 Mc overall) Channel C, ± 1 Mc (2 Mc overall)

CATHODE RAY SWEEP: Oscillatory or non-oscillatory (Servo) Variable Sawtooth Generator, 35 to 40,000 cycles per second.

AUDIO OUTPUT: 50 milliwatts into 600 or 8000 ohm load.

VERTICAL AMPLIFIER: Single stage, ± 2db from 30 cycles to 100 kc or higher. Amplifier cut position permits direct connection to one vertical plate through coupling capacitor.

HORIZONTAL AMPLIFIER: Single stage, ± 2db from 30 cycles to 100 kc. No provision for direct connection to deflection plates.

CATHODE RAY TUBE VOLTAGE: Cathode to accelerating anode; 1200V DC for 115V A.C. input.

SENSITIVITY OF CATHODE RAY OSCILLOSCOPE: Maximum through Amplifier. Horizontal: 10 volts peak to peak per inch. Vertical: 1.8 volts peak to peak per inch.

DIRECT TO VERTICAL PLATE: 150 volts peak to peak per inch.

NOISE: No disturbance in excess of 25,000 microvolts between 200kc to 200Mc generated by equipment.

Overall Dimensions: 19-9/16" x 10¼" x 7⅝"

Weight: 40 lbs.

Power Requirements: 115V. A.C. 60 cycles, 1 phase.

With 21 tubes including 3" scope tube, for operation on 115 V. 60 cycle source. **PRICE**.....$245.00

AN/APA-10 80 Page Tech Manual.....$2.75

LINEAR SAWTOOTH POTENTIOMETER

W.E. KS-15138

Has continuous resistance winding to which 24 volts D.C. is fed to two fixed taps 180° apart. Two rotating brushes 180° apart take off linear sawtooth wave voltage at output.

Brand New $5.50

LAVOIE FREQ. METER 375 to 725 MCS

Model TS-127/U is a compact, self-contained, precision (± 1 MC) frequency meter which provides quick, accurate readings. Requires a standard 1.5V "A" and 45V "B" battery. Has 0-15 minute time switch. Contains sturdily constructed Hi-"Q" resonator with average "Q" of 3000 working directly into detector tube. Uses 957, LS6 and 384 Tubes. Complete, new with inst, book, probe and spare kit of tubes. Less batteries. Write for descriptive circular.....$69.50

PLEASE NOTE OUR NEW ADDRESS

PARABOLOIDS

Spun Magnesium dishes 17⅛" dia., 4" deep. Mounting brackets for elevation and azimuth control on rear. 1⅝" x 1⅝" opening in center for dipole. Brand new per pair.....$8.75

SWEEP GENERATOR CAPACITOR

High speed ball bearings. Split stator silver plated coaxial type 5/16 mmfd. Brand new..... $2.50

RAYTHEON VOLTAGE REGULATOR

Adj. input taps 95-130V., 60 cy. 1 Ph Output: 115V., 60 Watts, ¼ of 1% Reg. Wt. 20 lbs. 6⅛" H x 8⅛" L x 4⅝" W. Overload protected. Sturdily constructed. Tropicalized. Special.....$14.75

Synchro Differential Generator

Ford Inst. Co. Type 5BDG. Brand New.....$22.50

MOTOR GENERATORS DYNAMOTORS, INVERTERS, ETC.

2.5 KVA MG SET. Diehl Elec. Co. 130V DC to 120V AC, 60 cy. 1 Ph. Complete with Magnetic Controller, 2 Field Rheos and Full Set of Spare Parts including Spare Armatures for Generator and Motor. Full specs. on request. New. $285.00

2 KVA MG SET. O'Keefe and Merritt. 115V DC to 120V AC, 60 cy. Idles at 3 Ph. synco motor on 208V, 60 cy. New. Export crated...$149.50

MG SET FOR NAVY TBS TRANSMITTER. Type CG-21302. 440V AC, 60 cy, 3 Ph, 1500 VA to 875V DC and 300V DC. New $68.50

DYNAMOTOR. Navy Type CAJO-211444. 100/130V-DC to 12V DC at 40A or 26V DC at 30A. Radio filtered. Complete with Line Switch. New. $69.50

DYNAMOTOR. Elecor. 32V DC to 118V AC, 60 cy, 1 Ph, 2.04 Amps. New.....$24.50 Also available for 64 volts input. Same price.

DYNAMOTOR. Elecor. 32V DC to 110V AC, 60 cy, 1 Ph, 0.43 Amps. New.....$17.50

AMPLIDYNE—G. E. Model 5AM31NJ9A. 530 Watts, 7500 R.P.M. Input: 27V DC, Output: 60V. DC. Weight 34½ lbs. New.....$16.50

AMPLIDYNE—G. E. Model 5AM31JJ7. 4000 R.P.M. Motor Compound wound. 150 Watts. Input: 27V. DC. Output: 60V. DC Sig. Corps. U. S. Army MG-27-B. New $26.50

AMPLIDYNE—Edison type 5AM31NJ18A. Input: 27 volts 44 Amps., 3300 RPM. Output: 60V DC at 8.8 amps. 530 Watts. New.....$22.50

INVERTER—Leland Elec. Co. Model PE304A. Input: 28V. DC, 35 Amps. Output: 80V., 900 cy, 485 VA. New $17.50

INVERTER—G. E. Model 5D-21NJ3A. Input: 24V DC, Output: 115V. 400 cy, 488 Va. New.....$24.50

PE 218 INVERTER—G. E. J81G9172. Input: 28V. DC, Output: 115V, 400 cycles at 1.5 KVA....$98.50

D. C. MOTOR—G. E. Model 5BA 86LJ3A 0.5 HP. Armature: 27V. at 8.8 Amps. Field: 60V. at 2.5 Amps. R.P.M. 400. New.....$16.75

DYNAMOTOR—Type PE94C. For use with SCR522 Transmitter-Receiver. Brand new in export crates. $9.50

Radar Antennas in stock. Types SO-1, SO-3, SO-13. Brand New.

All prices indicated are F O B Bronxville, New York. Shipments will be made via Railway Express unless other instructions issued.

ELECTRONICRAFT
INC.
27 MILBURN ST. BRONXVILLE 8, N. Y.
PHONE: BRONXVILLE 2-0044

All merchandise guaranteed. Immediate delivery, subject to prior sale.

All Prices Subject to Change Without Notice

TEST EQUIPMENT



X Band Spectrum Analyzer 8500-9600 Mc., calibrated linear below cut-off attenuator, calibrated frequency meter, tuned mixer, 4 I.f. stages. 3 video stages overall gain 125 db., regulated power supply.

S Band Spectrum Analyzer 2700-3900 Mc., similar to above.

X Band Test Load low power low power $20.00

X Band Below Cut-Off Wave Guide Attenuator, with calibrated dial, type N input connector, output connects to ½" x 1" wave guide.....$55.00

X Band Test Load, low power....$15.00

TS-62 X Band Echo Box with r.f. cable and pick-up antenna.

TS-33 X Band Frequency Meter, 8500-9600 Mcs. Crystal detector and 50 micro-amp. meter. Indicates Resonance. Connection for scope available.

TS-45A-APM-3 Signal Generator, 8700-9500 mc., 110 V. 60-800 cps.

TS-35/AP X Band Signal Generator, pulsed, calibrated power meter, frequency meter, 8700-9500 mc.

30 MC I.F. STRIP, VIDEO, and AUDIO AMPLIFIER AND 110 Volt 60-2600 cps POWER SUPPLY. Bandwidth 10 mc, new, part of SPR-2 Receiver.

AMPLIFIER STRIP AM-55A/SPR-2 contains I. F. amplifier, detector, video amplifier, pulse stretcher and audio amplifier and Rectifier Power Unit PP-155A/SPR-2 bandwidth 10 mc, center frequency 30 mc, sensitivity 50 microvolts for 10 milliwatts output. Power supply 80/115 V ac, 60-2800 cps 1.3 amps. .....$65.00 less tubes

X Band Test Load, 50 watts, average power ½" x 1" waveguide. Sand load TS 108.....$35.00

HI POWER X BAND TEST LOAD, dissipates 280 watts of average power for ⅝" x 1¼" waveguide, VSWR less than 1.15 between 7 and 10 KMC $150.00

S Band Signal Generator Cavity With Cut-Off Attenuator, 2300-2950 mc., 2C40 tube, with modulator chassis $30.00

High Pass Filter F-29/SPR-2, cuts off at 1000 mc. and below; used for receivers above 1000 mc.....$12.00

UPN-1 S Band Beacon Receiver-Transmitter $75.00

S Band Test Load TPS-55P/BT, 50 ohms $12.00

High Pass Filter F-29/SPR-2, cuts off at 1000 mc and below; used for receivers above 1000 mc.....$12.00

TS-125 CALIBRATED S BAND POWER METER with attenuator.

TS-155 S BAND SIGNAL GENERATOR and Power Meter.

S Band Mixer, tunable by means of slider, type N connector for the R. F. and local oscillator input. U.H.F. connector for the I.F. output, variable oscillator injection $30.00

TS-110 S Band Echo Box 2400-2700 mc. portable $110.00

HI POWER S BAND TEST LOAD, dissipates 1000 watts of average power, for 1½" x 3" waveguide. Range 2500 to 3700 MC.

X Band Thermistor Mounts, VSWR less than 1.4 8500-9600 MC Fixed triple tuned, ½"x1" waveguide.....$40.00
Fixed triple tuned ⅜"x1¼" waveguide $50.00

Frequency Meter, 8500-9600, variable, absorption type for either ½"x1" or ⅝" x1¼" waveguide, with calibration, ±4 MC, precision ground thread.$150.00

X Band Crystal Mount, ½"x1" waveguide $25.00

X Band Attenuator, double van type, VSWR less than 1.4, 8500-9600 MC 0-30db, calibrated for 1¼"x⅝" waveguide $80.00
½"x1" to ⅜"x1¼" adapter, UG80/U $5.00

TS-203/AP CALIBRATED SELSYN..$10.00

GENERAL RADIO PRECISION WAVEMETER TYPE 724A, range 16 kc to 50 mc. 0.25% accuracy. V.T.V.M. resonance indicator, complete with accessories and carrying case NEW....$175.00

HEWLETT-PACKARD-AUDIO SIGNAL GENERATOR 205A.....$230.00

RADIO RECEIVER BC-967T2, 18-160 mc. 3 bands FM/AM, 110 V, 60 cps. $200.00

RADIO RECEIVER BC-969-B, 15-150 kc. $150.00

RADAR RECEIVER BC-1068A, 150-210 mc., individual tuning for r.f. stages, bandwidth 4 mc., 115 v. 60 cy.....$30.00

MEASUREMENTS 78E. 50-75 mc, calibrated output.....$100.00

ESTERLINE Angus recording Milliameter 60 cycles, AC.....$150.00

FERRIS MODEL 10B SIGNAL GENERATOR, 85 kc to 25 mc, calibrated output, good working order.....$100.00

TS-184 Echo Box and Attenuator for APS-13.

TS-226 Peak Power Meter for APS-13.

TS-89 Voltage Divider for measuring high video pulses, ratios 1:10 and 1:100 transmission flat within 2 db 150 c.p.s. to 5 mc., with cable for attaching to syndroscope.

Waveguide Below Cut-off Attenuator L 101-A U.H.F. Connectors at each end calibration 30-100 db.....$10.00

FIXED ATTENUATOR PADS, 20 db+0-2 db DC-1200 mc, 50 ohms, VSWR 1.3 or less, 2 watts average power....$30.00

WAVEGUIDE BELOW CUT-OFF ATTENUATOR same as above except input is matched in range of 2200-3300 mc. VSWR less than 1.2.....$54.00

PULSE TRANSFORMER 132-AWP...$8.00

PULSE TRANSFORMER GE 69G, 828 G-1 $6.00

HYPERSIL CORE CHOKE, 1 Henry, Westinghouse L-422031 or L 422-32....$3.00

PULSE FORMING NETWORK, 20 kv., .92 micro-second, 50 ohms, 800 p.p.s. $40.00

PULSE INPUT TRANSFORMER, permalloy core, 50 to 4000 kc., WE-D161310, impedance ratio 120 to 2350 ohms..$3.00

TRANSFORMERS, 115 volts, 60 cps primaries:

1. 6250, 3250 and 200 volts, tapped primary voltage doubler, 12.5 kv. ins. $14.00
2. 6250 volts 80 ma. G.E. voltage doubler, 12.5 kv. ins.....$12.00
3. 2 secondaries at 500 volts 5 amps each, at 210 pounds.....$50.00

SD-3 SHIPBOARD RADAR. New and complete with test equipment....$1050.00

SQ RADAR, used but in good working order, complete with antenna, control unit $650.00

SN RADAR, used, good working order, complete $550.00

UG-27/U TYPE N RIGHT ANGLE ADAPTERS 10 for $5.00; 1000 for $250.00

U.H.F. RIGHT ANGLE ADAPTER 10 for $2.50; 1000 for $125.00

ELECTRO IMPULSE LABORATORY

P. O. Box 250 Eatontown 3-0007 Red Bank, N. J.

ARROW→"The Home of Values!"

BC 906—Frequency Meter

Range 150-225 MC with modifications possible for lower frequencies of TV, etc. Contains 0-500 DC microammeter and uses Battery pack of 1.5 V and 45 VDC.

Like New—Less Batteries $10.95

CONDENSERS

	Each
1 mfd 6000 VDC, OIL FILLED	$1.98
.00025 mfd. 25000 VDC OIL FILLED	2.95
1 mfd. 600 VDC, OIL FILLED	.34
	5 for 1.00
50 mmfd—5KV—5 Amp. Vacuum Cond.	1.19

AS-138/ARN—10 inch streamline loop as used with direction finding receivers. Fixed position, it is ideal for planes, boats, automobiles. New $1.95

IS-185 Weston Voltmeter Model 433—0 to 150 VAC 25 to 2400 cycles. New $24.95

TUBE SPECIALS!

211	$ .39
307A	5.50
703A	1.89
723A/B	12.95
724B	1.89
803	2.89
805	3.29
807	1.89
813	6.95
832	2.95
832A	7.95
837	1.19
841	.49
860	4.95
864	.24

DYNAMOTORS

DM 32A	PE 73
DY2/ARR2	PE 94
DA 1A	PE 86
DM 34	DM 28
DM 35	DM 33
DM 36	PE 206
DM 37	PE 101
DM 40	DM 53A
DY 12	PE 218
DY 17	MG 149
BD 77	

Many other types are also in stock. Your inquiry is invited. Prices upon request.

RADIO EQUIPMENT

RC 100 B

This equipment made by General Electric, was designed for ground use as an identification of friendly aircraft.

CABINET CH-118 is of the Standard 19 inch rack type structural steel frame with runner angles for each of the units. A full length access door with safety interlocks forms the rear of the cabinet..$34.95

TRANSMITTER BC-769 is designed to transmit RF pulsed signals at 470 megacycles with the use of the two type 15E Tubes operating in push-pull with resonant grid, plate and filament lines — Less tubes $19.95

KEYING UNIT BC-770 furnishes the pulse of the Transmitter—Less tubes $14.95

RECEIVER BC-768 was used to detect the 493.5 megacycle reply pulses from the interrogated station and to sufficiently amplify these signals for oscilloscope observation.....Less tubes $19.95

RECTIFIER RA-52 produces the high voltage. An 0-15 kilowatt DC Meter is connected across the output of the filter to measure the voltage fed to transmitter BC-769, while an 0-20 milliammeter is connected to ground return to measure the average current drawn—With tubes $74.50

AIR COMPRESSOR M-349 together with 12 feet of ¼ inch soft copper tubing and necessary hardware is used to fill and maintain transmission lines with dry air under pressure. Operation is direct from 110 V AC 60 cycles $42.50

OVEN M-348 is furnished for removal of moisture from the dehydrating cylinders of the compressor. It too operates from 110 V AC 60 cycles..... $29.50

FREQUENCY METER BC-771 is used for frequency checking and for tuning operations on Radio Transmitter BC-769 and Radio Receiver BC-768. It is a separate unit mechanically and has its own power supply, which requires a 110 to 120 Volt, 50 to 60 cycle source $49.50

TECHNICAL MANUAL TM11-1113B covering entire equipment $5.00

COMPLETE UNITS are available at amazing low price . . . WRITE TODAY!

BC-604 TRANSMITTER FM 20-28 MC

11 and 18 meters. Can be operated on 10 meters—10 channel push button crystal. With all tubes and meter but less dynamotor. Excellent Condition

$19.95

Crystals — Set of 10 **$19.95**

BC 603

Receiver—Good. Used. **$24.95**

Complete SCR-508 Installation available—price and information upon request.

MISCELLANEOUS SPECIALS!

	Used	New
ASB 7 Indicator Scope	$12.95	
MN 26 C	17.50	$24.95
RA 10 DA Receiver	17.50	$4.95
RT7/APN1 Transceiver	6.95	9.95
APN 1 Complete		$4.50
BC 347 Interphone Amplifier		2.95
I-70 Tuning Meter		.59
BC 461 Veeder Root Counter		.59
BC 443 Less Condenser	1.49	1.95
APS 13 UHF Antenna, Pair		.98
FL 8 Filter		2.95
I-97 Bias Meter	3.98	4.95
RM 29 Remote Telephone Control	7.95	9.95
RL 42 Antenna Gearbox Motor and Reel	4.95	7.50
TS 10—Sound powered phones	6.50	

BC 1066 B—150 to 225 MC Portable Receiver adaptable to many amateur uses. In Canvas Carrying Bag. Used $5.95

Tuning Units for BC 375 — Presently most numbers are available in excellent condition with cases at ..... $2.95 ea.

One Tube Interphone Amplifier—Small compact aluminum case fully enclosed. 2¼" x 3¾" x 5¾". Less Tube..... 79¢

90Q1 Complete Autotune assembly with motor and frame as used in ARC-1 Transmitter. New $35.00

BC 709 Battery operated lightweight interphone amplifier. Complete with tube and shock mount, but less battery....New $3.95

SCR 183 Complete..... New $49.50

230 MA Circuit Breaker..... New .59

Collins VFO Dial—5 calibrated ham bands from 3.2 Mc to 32 Mc; complete with pointer, gears, logging dial and flywheel. Scale 6" on 8" plate. New..... each .95

C-18—Antenna coil assembly slug tuned used in BC 603 receiver. Frequency range 20-27.9 Mc.—fully shielded .....New. 10 for $1.95

I 82 F—Five Inch 360 degree compass indicator and Selsyn receiver..... New $4.95

Indicator $2.45

A-61-3 Transmitter selsyn for 182 indicator $2.45

(Both 182F & Trans. Selsyn for $7.00)

MC 385A—Headset Adapter..... New 49¢

Information and Prices on Request

RTA 1B Transceiver

TA 2J24 Transmitter and MP 10G Power Pack

SCR 269 Compass Installation

R 5/ARN 7 Compass Installation

MN 26 Compass Installation

ASB7 Complete Radar Installation

ID6/APN4 Scope unit complete with 5CP1 cathode ray tube and shield and all parts except smaller tubes and crystal. Used ..... $9.95 ea.

BC 620

Receiver-Transmitter—2 crystal channels—20 to 27.8 MC FM—13 tubes. Metered, Plate and Filament ..... Used $9.95

PE-97 or PE 117 or PE 120 Power Supply for above 6-12 volt vibrator type.

Used less tubes, vib. & con..... $2.95

Used, complete $4.95

FT 250 Mount for both BC 620 and PE 97 New $1.50

BC 223

Brand new **Transmitter** with all three tuning units, two tuning unit cases, spare tube carrying case, shock mount and brace; but less tubes at new low price of **$29.95**

Set of 5 tubes..... $3.95

Tuning units are available separately at Ea. $2.50

PE 125—12-volt Vibrator Pack...New $12.95 Used 8.95

SURPRISE PACKAGE

20 lbs. Ass't radio parts. A $25.00 value for only..... $1.95

TEST EQUIPMENT

EV-16	Precision Vacuum Tube Test Set ..... used	$29.00
No. 772	Weston Multi Tester..... used	40.00
No. 492	Radio City Products. Volt-Ohm Meter ..... used	25.00
No. 471	Radio City Products Output Meter ..... used	18.00
No. 803	Radio City Products Tube Tester & Set Tester..... used	35.00
No. 777	Weston Tube Checker..... used	29.00
No. E 200	Precision Signal Generator ..... used	25.00
No. M-652	Jackson Audio Oscillator ..... used	30.00
No. 224 A	Dumont Oscilloscope.. used	80.00
No. 155 A	RCA Oscilloscope..... used	90.00
No. M-840	Triumph Oscilloscope.. used	75.00
BC-1267	Oscilloscope..... used	75.00
BC-221	Frequency Meter....Like New	90.00
	Others as Low as.....	49.50

PRICES UPON REQUEST

I-56-A	TS10A/APN
I-114 P/O RC-43	TS16/APN
I-135 P/O IE-17	TS19/APQ5
I-167 Weston Anal. #772	TS27/TSM-1
I-183 Freq. Meter	TS36/AP
I-185 Oscillator	TS47/AP
I-187 Synchroniser	TS59/APN-1
I-189 Calibrator	TS62/AP
IE-19	TS102A/AP
IS-185 Voltmeter	TS126/AP
TS8/AP	TS-751 Less Xtal

COMMAND (SCR 274 N) EQUIPMENT

	Used	New
BC-453	$12.95	
BC-454	5.95	
BC-455	7.95	$9.95
BC-456		2.95
BC-457	5.95	
BC-458	5.95	8.95
BC-696	14.95	24.95
BC-456—3 Receiver Remote Control	.89	1.95
BC-442		2.95
3 Receiver Rack	1.95	
2 Transmitter Rack	1.50	

Complete Command set as removed from aircraft—3 receivers—2 transmitters—Relay unit — control boxes — mounting racks — plugs — modulator and dynamotors—crated Set **$34.50**

R C—150 RADIO EQUIPMENT

BC 1161 A Receiver is a 14 tube superhet all ready for 110 V 60 cycle operation. Frequency coverage is from 157 to 187 MC, but may be trimmed to cover the two meter ham band. The IF transformers are stagger tuned to provide a 4 MC band pass, but they may be retuned to a sharp center frequency of 11MC with no wiring changes. All RF and IF tuning is done by observing a magic eye indicator tube from the front panel. **Brand New—Complete $34.95**

BC 1160 A Transmitter also covers a frequency of from 157 to 187 MC and is also ready for 110 V 60 cycle operation using a transtat for regulated control and a meter for indication. Output is pulsed, reaching a peak of one kilowatt. Tube complement as follows: 1-6SN7; 1-9002; 1-9006; 1-6J5; 1-807; 1-2X2; 3-530; 3-5V4G. **Brand New—Complete $34.95**

BC 1162 A Interconnector and wavemeter units. These are contained in one housing but may be separated without interfering with the separate circuit wiring. Primary purpose is to control operation of transmitter and receiver units for correlation with radar screen, and to provide means of measuring their frequencies by means of cavity resonator.

New, complete except tubes. $14.95

All shipments FOB warehouse. 20% Deposit required on all orders. Minimum order accepted—$5.00. Illinois residents, please add regular sales tax to your remittance.

ARROW SALES, Inc.

Dept. E

1712-14 S. Michigan Ave., Chicago 16, Ill.

PHONE HArrison 7-9374

Switches

FINEST QUALITY

Immediate Delivery from Our Huge Stock...
All New and Unconditionally Guaranteed!

FIG. A FIG. B FIG. C FIG. D FIG. G FIG. H FIG. P FIG. K FIG. L

WIDE SELECTION OF ELECTRONIC COMPONENTS AT

WELLS

Tubes • Resistors
Condensers
Wire and Cable
Volume Controls
Co-ax Connectors
Relays • Rectifiers
Transformers • Chokes
Micro Switches, Toggles
Antennas, Accessories
Electronic Assemblies
Dial Light Assemblies

TOGGLE SWITCHES

STOCK NUMBER	FIG.	CONTACT ARRANGEMENT	MANUFACTURER & NUMBER	PRICE EACH
PH-500	A	SPDT.	B18.	$0.35
PH-503	A	SPDT Center Off Mom Each Side.	B11.	.32
PH-505A	A	SPDT Momentary.	B21.	.30
PH-505	A	SPST.	AN-3022-2B.	.30
PH-506	A	SPDT Center Off.	AN-3022-1.	.35
PH-507	A	SPDT Center Off Mom Each Side.	AN-3022-7B.	.32
PH-513	A	SPDT Center Off.	Cutler Hammer AN-3022-1B.	.38
PH-514	A	SPST.	Cutler Hammer B-5A.	.35
PH-516	A	SPST.	B5.	.35
LT-104	A	SPDT One Side Momentary.	Cutler Hammer 8905K568.	.35
309-168	A	SPST.	168553.	.30
309-178	A	SPDT Momentary.	AN-3022-11B.	.35
309-181	A	SPST Momentary.	Cutler Hammer 8211K6.	.35
305-172	A Spcl.	SPST Momentary.	Cutler Hammer 8905K531.	.35
305-182	A Spcl.	SPST Momentary.	Cutler Hammer 8905K630.	.45
370-14	A	SPDT Center Off 1 Side Mom.	Cutler Hammer B-7A.	.30
370-4	A	SPDT Center Off.	Cutler Hammer B-9A.	.35
370-25	A	SPST Momentary.	Cutler Hammer B-6B.	.25
309-169	B	SPST Momentary.	Cutler Hammer B-19	.35
PH-509	C	DPST.	AN-3023-2B.	.45
PH-510	C	DPDT Momentary.	Cutler Hammer 8715K2.	.50
PH-511	C	DPDT Momentary.	Cutler Hammer 8715K3.	.50
PH-512	C	DPST Center Off.	Cutler Hammer 8720K1.	.55
303-65	C	DPST.	Cutler Hammer AN-3023-2.	.45
309-163	C	DPDT Center Off Momentary.	Cutler Hammer C-11.	.55
309-162	C	DPST.	Cutler Hammer C-1.	.45
309-164	C	DPST Momentary.	Cutler Hammer 8711K3.	.40
305-87	D	1 Side DPST Mom, 1 Side SPST.	AH & H	.95
LT-100	F	SPST.	Cutler Hammer.	.22
LT-101	F	SPST Momentary.	AH & H. W/Leads.	.20
301-51	G	4PDT Momentary.	Cutler Hammer 8905K12.	.75
305-140	H	DT No Make Each Side.	Open Frame.	.25
309-161	K	SPST.	Cutler Hammer 8781K3.	1.95
309-170	K	SPST.	Cutler Hammer 8905K656.	2.25
301-41	L	DPST.	AH & H	.75
305-76	L	DPST.	AH & H—Open Frame.	.75
319-50	L	SPST.	Allied Elec. Mfg. Corp.	.28
305-170	Spcl.	SPST.	Cutler Hammer Type B13.	.40



SWITCHETTES

STOCK NUMBER	MANUFACTURER'S TYPE NUMBER	CONTACTS	TERMINAL LOCATION	UNIT PRICE
303-20	CR1070C103-A3	N.C.	Side	$0.47
301-29	CR1070C103-B3	N.O.	End	.47
303-34	CR1070C103-C3	1-N.O. 1-N.C.	End	.47
303-18	CR1070C103-F3	1-N.O. 1-N.C.	Side	.47
303-19	CR1070C103-E3	N.O.	Side	.47
303-43	CR1070C123-B3	N.O.	End	.47
303-23	CR1070C123-C3	1-N.O. 1-N.C.	End	.47
305-83	CR1070C123-J2	SPDT	End	.47
303-22	CR1070C123-J4	SPDT	End	.47
303-17	CR1070C124-M4	SPDT	Side	.47
303-16	CR1070C128-C3	1-N.O. 1-N.C.	End	.47

LEAF SPRING SWITCHES

STOCK NUMBER	CONTACT ARRANGEMENT	SPEC. INFORMATION	BACK OF PANEL DIM.	PRICE EACH
302-96	4PDT One Side.	. . . . .	3¼x1¾x¾	$1.65
311-58	1A Momentary & 1A.	W/Escutcheon Plate	3¼x¾x¾	1.35
309-167	2C One Side.	. . . . .	3x⅝x1 1/16	1.25
305-183	3A Momentary & 3A Momentary.	. . . . .	3¼x1¼x¾	1.50
319-43	DPDT Center Off.	Mossman.	3⅞x2x1⅜	.85
319-42	4PDT Center Off Mom One Side.	Mossman.	3⅞x2x1⅜	.95
309-159	3B.	Mossman.	3⅞x2x1¼	.85
309-158	2D.	Mossman.	3⅞x2¼x1⅜	.85
309-165	1A.	Mossman.	3⅞x1 5/16x1¼	.75
311-96	4PDT.	Bakelite Actuator.	3 1/16x1⅛x⅞	.85
305-164	3A.	. . . . .	3¼x1 1/16x1 1/16	1.25
319-43A	DPDT Center Off Mom Each Side.	Mossman.	3⅞x1⅛x2	.95
305-165	3A & 3A.	Switchboard Type.	4¾x1¼x¾	.95

Many Other Types in Stock. Send Us Your Requirements.
Order From Your Parts Jobber or Directly From Wells.

WRITE FOR NEW WELLS CATALOG

World's Largest Display of Radio and Electronic Components. 9000 Square Feet of Display All on One Floor.

WELLS SALES, INC.

320 N. LA SALLE ST. DEPT. SL, CHICAGO 10, ILL.

RCA HI-VOLTAGE TRANSFORMER

Pri—115/230V, 60Cy
Sec—6000V—60 MA

$11.80

Insulated for Voltage Doubler Use

KOLLSMAN INSTRUMENT
LOW INERTIA SERVO MOTORS

Type 937-0240—85/68 Volts—100 Cycles 2 Phase—5 Watts—2650 RPM
Will Operate Satisfactorily at 60 Cycles
Original Price $34.50—Our Price—$8.22 ea.

$7.50 EACH—Lots of 10

COAXIAL CONNECTORS

83-1AC	.42	UG-12/U	.43
83-1AP	.15	UG-21 /U	.67
83-1JP	1.12	UG-22 /U	.86
83-1R	.10	UG-23 /U	.83
83-1J	.50	UG-24 /U	.67
83-1R	.40	UG-27 /U	.60
83-1SP	.45	UG-29 /U	.83
83-1SPN	.60	UG-30 /U	1.20
83-1T	1.12	UG-34 /U	12.50
83-22AP	1.10	UG-36 /U	12.50
83-22P	1.46	UG-37 /U	13.90
83-22R	.46	UG-88 /U	.65
83-22SP	.85	UG-88 /U	.88
UG-86/U	1.22
UG-87/U	.79
UG-171/U	1.30
UG-175/U	.15
UG-176/U	.15
UG-181A/U	7.85
UG-191/AP	.63
MX-195/U	.41
UG-197/U	1.22
UG-206/U	.63
UG-255/U	1.22
UG-264/U	1.78
UG-290/U	.88

FULL LINE OF JAN APPROVED COAXIAL CONNECTORS IN STOCK

WESTINGHOUSE HYPERSIL TRANSFORMER



PRI-115V. 60CY ¾ KVA
SEC #1 - 240V - 1.88A
SEC #2 - 240V - 1.88A
WT. 20 LBS.

$11.50 EACH

GENERATORS

- Eclipse-Pioneer type 716-3A (Navy Model NEA-3A) Output—AC 115V 18.4A 800 to 1400 cy. 1 ø; DC 30 Volts 60 Amps. Brand New — Original Packing $325.00
- Eclipse-Pioneer type 1235-1A. Output—30 Volts DC 15 Amps. Brand New—Original Packing....$9.50

STANDARD BRANDS ONLY

TUBE SPECIALS

BRAND NEW FIRST QUALITY

COMPLETE STOCK OF RECEIVING, TRANSMITTING, CATHODE RAY, THYRATRON, IGNITRON, MAGNETRON, KLYSTRON, PHOTOCELL, T-R & ATR TUBES. QUOTATIONS UPON REQUEST

PULSE TRANSFORMERS

UTAH 9242 and 9340	$2.75
UTAH 9278	2.75
G. E. 68G-627	4.75
AN/APN-9 (901756-501)	1.50
AN/APN-9 (901756-502)	1.50
AN/APN-4 Block, Osc	1.25
Philco 352-7149—Modulator to 50 ohm line. 115 KW peak power	$5.95
Philco 352-7150—50 ohm line to magnetron. 115 KW peak power	$9.95

SPRAGUE PULSE NETWORKS

7.5 E3-1-200-67P, 7.5 KV, "E" Circuit 1 microsec. 200 PPS, 67 ohms imped. 3 sections.....$4.50
7.5 E3-3-200-67P, 7.5 KV, "E" Circuit 3 microsec. 200 PPS, 67 ohms imped. 3 sections.....$6.75
7.5 E4-10-67P, 7.5 KV, "E" Circuit 4 sections, 10 microsec. 60 PPS, 67 ohms imped.....$8.25
15—E4-1.5-600-50P, 15 KV "E" Circuit 1.5 microsec. 600 PPS, 50 ohms imped. 4 sections..$12.00
15—E6-5-180-50P, 15 KV, "E" Circuit 5 microsec. 180 PPS, 50 ohms imped. 6 sections.....$25.00

MISCELLANEOUS EQUIPMENT

ID-6/APN-4 Indicator	$29.50
R-7/APR-9 Receiver	49.50
R-78/APS-15 Receiver	49.50
SCR-522 Transceiver	36.50
RT-7/APN-1 Transceiver—less tubes	8.95
FL-8 1820 cycle filter	1.97
RM-29 remote control unit	8.95
RM-14 remote control unit	8.95
RTA-1B 12/24 V dynamotor	30.00
BC-1206-CM2 Receiver	7.95
CY-230/MPB-1 Radar Console	575.00
G.E. Type IP-1 portable current transformer	32.50
ASB-4 Radar equip. Complete	89.75
AN/APS-13 less tubes	12.95
T-9/APQ-2 less tubes	18.50
BC-645A complete	18.95
RCA AVR-15 Beacon Recvr	15.50
TBY Trans-Recvr	29.95
T-47/ART-13 Transmitter	165.00
T-47A/ART-13 Transmitter	185.00
G.E. 2CV2A1 Servo Amplifier	6.95
Sperry A-3 Hydraulic Servos	3.95
ELMAC 35 TG Ionization Gauge	5.95
CP-11/APS-15 Range Unit less tubes	32.50
ATR Inverters 6VDC to 110 VAC 60 cy 75W—Orig. Cartons	19.95
Pioneer Type 600-1B Inverters—28VDC to 120V 800 cy 7 amp AC (used)	22.95
G.E. Inverter—28VDC to 120VAC 800 cy 750VA	59.50
1 ø (new)	59.50

SOUND POWERED TELEPHONES

- U. S. INSTRUMENT Type A-200
- WESTERN ELECTRIC Type D-173013
- AUTOMATIC ELECTRIC Type GL-632BAO

U. S. NAVY TYPE H HEAD AND CHEST SETS

These are high quality heavy-duty units not to be confused with cheaper units now available. Designed to withstand exacting shock, vibration, salt water corrosion, temperature and pressure tests. ANY TYPE .....$14.00 ea., $26.00 per pair.
TS-10 HANDSETS .....$8.50 each

METERS

500 Microamps. DC—2½" round—Sun	$4.50
1 ma. DC—3½" R. (4 KV scale)—Roller Smith	4.17
1 ma. DC Fan type—4" scale (rem. from equipt)	3.95
500 ma. DC 2½" R.—General Electric	2.95
3 amp. RF 3½" R.—Weston	4.50
2 amp. RF 2½" Sq.—Simpson	5.15
5 amp. AC 4½" R.—JBT	4.11
1 ma. DC 4½" R.—Marion	6.88
50 VAC 3½" R.—General Electric	4.11
50-62 Cycles (115 V.) 3½" R.—JBT	6.45
10 amp. RF 3½" R.—Simpson	4.98

MAGNETRONS

2J31A	$8.95	2J38	12.70	708C	16.98
2J32	8.95	2J41	132.50	709D	16.98
2J36	7.80	2J48	14.95	706AY	45.00
2J37	13.70	2J49	39.50	706BY	45.00
2J38	9.60	2J61	36.70	706CY	17.95
2J53	14.45	4J50	197.00	706FY	45.00
2J55	19.90	4J52	197.00	706GY	45.00
2J56	19.90	5J23	14.20	714AY	6.95
2J58	85.00	5J29	14.20	720A	8.95
2J37	13.70	700B	16.90	720A	10.95

KLYSTRONS

2K33	$23.95	2K33	295.00	707B	12.95
2K25	23.50	2K54	135.00	723A	4.95
2K26	75.00	2K55	135.00	723A/B	11.95
2K28	23.50	417A	10.45	726A	14.50
2K29	29.95	707A	6.95	726B	29.50

TYPE "J" POTENTIOMETERS
75¢ each

Resis.	Shaft	Resis.	Shaft	Resis.	Shaft
100	5/8"	10K	SS	100K	9/16"
200	SS*	15K	¼"	100K	¼"
500	¼"	15K	SS	100K	7/16"
650	¼"	20K	SS	100K	SS*
5000	¼"	25K	1¼"	150K	¼"
6500	SS*	25	SS	200K	SS
10K	¼"	30K	1¼"	250K	SS
10K	¼"	50K	SS	1 MEG	SS

Dual "JJ" Potentiometers.....$1.20 each
50-50 () SS 100-100 () SS 250-250 () SS
Triple "JJJ" Potentiometers—¼" shaft.....$1.67
All shaft lengths beyond bushing—SS (screw slot)

TEST EQUIPMENT

- A.W. Barker Labs. VM-2S VTVM.....* $80.00
- TS-10A/APN Delay Line Test Set.....$25.00
- TS-10/APR-5 Calibrator.....$75.00
- AT-48/UP "X" Band Horn.....$3.95
- REL W-1158 Frequency Meter 100-220 MC.....$32.95
- CWI-80AAG Range Calibrator for ASB, ASE, ASV and, ASVC Radars.....$39.95
- CRV-14AAS Phantom Antenna for Transmitters up to 400 MC.....$11.75
- TS-146/AP X-Band Test Set. Price on request.
- TS-184/AP Price on request.
- CPR-80AAJ and CPR-80AAK—1FF Test Sets, (pair) $16.95

AN/APA-23 Recorder.....$147.50
TR-1B/APR-1 Tuning Unit.....$80.00
- C-D Quintone Filter Type IF-16 110/220 V AC/DC 20 Amps.....* $9.00
- TS-127/U Freq. Meter w/spares.....$90.50
- TS-143/CPN Oscilloscope.....$95.00
- Dumont 175A Oscilloscope.....$225.00
- Telrad 18 A Frequency Std.....$25.00
- LM-20 Frequency Meter.....* 40.50
- Gen. Radio 757-P1 Power Supply.....* $27.00
- Gen. Radio 670-F Decade.....* $38.50
- I-130 A Signal Generator.....* $70.00
- TS-6/AP Frequency Meter.....* $42.50
- L. & N KS-8670 Null Volt Test Set.....* $60.00
- Measurements 79B Pulse Generator.....$250.00
- MIT TTX-10RH 3 cm FM Test Set.....$325.00

All Items New Except Where Noted * (Exc. Used Condition)

SYNCHROS

General Electric 21IG1	pair	$2.95
Caps for connecting to above	pair	1.00
G. E. 2JIFI Generators	ea.	2.85
C-78248 Transmitters—110V 60 cy	pair	8.95
C-78411 Transmitter—60V 50 cy	pair	8.75
C-78248 Differentials—110V 60 cy	ea.	6.75
C-78410 Repeaters—110V 60 cy	ea.	6.75
C-78415 Repeaters—110V 60 cy	ea.	6.75
C-89406-1 Repeaters—110V 60 cy	ea.	12.00

Many additional types in stock including:
Types B, M, N, X, FIE 45-1
Sizes 5CT, 5D, 5DG, 5F, 5G, 5SF, 6G, 7DG

CONSTANT VOLT. TRANSFORMERS

Federal Constant Voltage Transformer Input 98-135V 60cy Output 115V 210W.....$34.00
Sola Constant Voltage Transformer Input 98-125V 60cy-Output 115V 288VA.....$24.70
Sola Constant Voltage Transformer Input 105-125V 60cy-Output 115V 90VA.....$15.95

SELENIUM RECTIFIER STACKS
FULL WAVE BRIDGE

MAXIMUM RATINGS		MAXIMUM RATINGS	
AC VOLTS INPUT - 18		AC VOLTS INPUT - 68	
DC VOLTS OUT - 14.5		DC VOLTS OUT - - 54	
1.2 Amps	$2.64	0.6 Amps	$3.90
2.4	3.67	1.2	5.44
3.6	4.99	2.2	5.15
13.9	7.67	6.0	9.32
17.5	8.69	9.0	10.05
24	15.33	12	18.64
39	22.98	18	27.96
52	30.67	24	35.94
65	38.33	36	41.24

W. E. MERCURY CONTACT RELAYS

Glass sealed mercury wetted SPDT contact assemblies. Magnetically operated. Used in Western Electric D-168479 high speed plug in relays. Supply your own coil .....$2.00 each

PIONEER SERVO SYSTEM UNITS

- Type 12073-1A Torque Amplifier, Input 115 V 400 cy. Complete with Tubes.....$14.95
- Magnetic Amplifier Assy. Saturable Reactor Type to supply one phase of 400 cycle Servo Motor.....$5.95

OIL FILLED CONDENSERS

MFD	VDC	Price	MFD	VDC	Price
.2	600	$ .45	.2	2000	$2.70
4	600	.95	4	2000	3.95
4	600	(R'dit) .95	1	2500	.49
4	600	(R'd) 1.85	1-1	2500	3.85
8	600	(R'd) 1.39	.2	2500	12.50
10	600	1.95	1	2500	4.85
16	600	(R'd) 2.95	.01-.03	3000	1.65
.5-.5	600	1.49	.1	7000	1.79
1	1000	.62	.2	12000	23.95
2	1000	.845	.5	16K	4.78
3.5-.5	1000	1.39	.05	16K	4.95
1	1500	.59	.075	16K	6.95
1	1500	2.95	.02	220VAC	3.95
.1-.5	2000	.67	.09	220VAC	4.75
.5	2000	.95	7	660VAC	3.35
1	2000	1.50			

ANTENNAS

AT-38A/APT (70 to 400MC)	$13.70
AT-49/APR-4 (300 to 3300MC)	13.70
AT-48/UP 3 cm horn antenna	4.95
DZ-2 Loop antenna with pedestal	14.50
AN-74B (125 to 150MC)	1.95
AN-48A (P/O SCR-521)	.95
AN-48A (P/O SCR-521)	1.15
AIA—3CM conical horn	125.00
ASB Yagi—5 element 450 to 500MC	7.90
ASB Yagi—Double stacked 5 element	12.70
ASA Yagi—Double stacked 570 to 630MC	29.40

COMPONENT SPECIALS

FUSES 4AG 10 Amp. $3.00/c
4AG 20 Amp. $3.00/c

MOLDED PAPER CONDENSERS—

.02 MFD	200 VDC	.04¼ Ea.	$3.00 per 100
.05	200	.04¼	3.00
.1	200	.04¼	3.00
.25	200	.04¼	3.00
.1	400	.09	6.00
.005	600	.04¼	3.00
.01	600	.04¼	3.00
.05	600	.05	3.50

CRYSTAL DIODES—

1N21	.79	1N23	1.19
1N21A	1.19	1N23A	1.85
1N21B	2.75	1N27	1.09
1N22	.89	1N34	.79
1N48			.94
1N82			1.65
1N83			1.59

PHASE SHIFT CAPACITOR—Type D—1207J4—4 stator single rotor.....$2.69

All material brand new and fully guaranteed. Terms 20% cash with order, balance C. O. D. unless rated. All prices F.O.B. our warehouse, Phila., Penna., subject to change without notice.

LECTRONIC RESEARCH LABORATORIES
1021-A CALLOWHILL ST. PHILA. 23, PA.
Telephones - MARKET 7-6590 and 6591

SELENIUM RECTIFIERS and ASSOCIATED COMPONENTS

SINGLE PHASE

Full Wave Bridge

Input: 0-18 VAC	Output: 0-12 VDC	
Type No.	Current	Price
B1-250	250 Ma.	$ .98
B1-1	1.0 Amp.	2.49
B1-1X5	1.5 Amp.	2.95
B1-3X5	3.5 Amp.	4.50
B1-5	5.0 Amp.	5.95
B1-10	10.0 Amp.	9.95
B1-20	20.0 Amp.	15.95
B1-30	30.0 Amp.	24.95
B1-40	40.0 Amp.	27.95
B1-50	50.0 Amp.	32.95

Input: 0-36 VAC	Output: 0-26 VDC	
Type No.	Current	Price
B2-150	150 Ma.	$ .98
B2-250	250 Ma.	1.25
B2-300	300 Ma.	1.50
B2-2	2.0 Amp.	4.95
B2-3X5	3.5 Amp.	6.95
B2-5	5.0 Amp.	9.95
B2-10	10.0 Amp.	15.95
B2-20	20.0 Amp.	27.95
B2-30	30.0 Amp.	36.95
B2-40	40.0 Amp.	44.95

Input: 0-115 VAC	Output: 0-90 VDC	
Type No.	Current	Price
B6-250	250 Ma.	$2.95
B6-600	600 Ma.	5.95
B6-750	750 Ma.	6.95
B6-1X5	1.5 Amp.	10.95
B6-3X5	3.5 Amp.	18.95
B6-5	5.0 Amp.	24.95
B6-10	10.0 Amp.	36.95
B6-15	15.0 Amp.	44.95

Full Wave Center Tap

Input: 18-0-18 VAC	Output: 0-8 VDC	
Type No.	Current	Price
C1-10	10.0 Amp.	$6.95
C1-20	20.0 Amp.	10.95
C1-30	30.0 Amp.	14.95
C1-40	40.0 Amp.	17.95
C1-50	50.0 Amp.	20.95

THREE PHASE

Full Wave Bridge

Input: 0-234 VAC	Output: 0-250 VDC	
Type No.	Current	Price
3B12-1	1.0 Amp.	$22.00
3B13-2	2.0 Amp.	32.00
3B13-4	4.0 Amp.	56.00
3B13-6	6.0 Amp.	81.50
3B13-10	10.0 Amp.	105.00
3B13-15	15.0 Amp.	120.00

RECTIFIER MOUNTING BRACKETS

For Types B1 through B6, and Type C1 $.35 per set
For Types 3B.....1.05 per set

D-C PANEL METERS

Attractive, rugged, and reasonably priced. Moving vane solenoid type with accuracy within 5%. Square case.
0- 5 Amperes DC
0-12 Amperes DC
0-15 Volts DC
} Any range $2.49 each

ATTENTION MANUFACTURERS!

We are now in a position to furnish Selenium Rectifiers, in quantity, to specifications. Excellent delivery, prompt quotations.

Minimum Order $5.

All prices FOB our NYC warehouse. Send check or money order. We will ship transportation charges collect. Rated concerns send P.O., Terms Net 10 days.

POWER SUPPLIES



GENERAL PURPOSE Low voltage DC power supplies, with variable outputs. Rugged—Dependable—precision control.

Features

- √ Long life Full Wave Selenium Rectifiers
- √ Output Voltage Continuously Adjustable from Zero to Maximum
- √ 3" Voltmeter and Ammeter 2% acc'y.
- √ Stepless Control
- √ Instant Power—No Warm-Up Period
- √ Assembled and Ready to Operate
- √ For 115 VAC 60 Cycles
- √ Dimensions 8½" x 16¾" x 8"

Write for descriptive bulletin GPA

Model	Voltage	Current	Price
GPA810	0-8 VDC	10 Amps.	$69.50
GPA1210	0-12 VDC	10 Amps.	75.00
GPA2810	0-28 VDC	10 Amps.	85.00

RECTIFIER CAPACITORS

CF-1	1000 MFD	15 VDC	$ .98
CF-20	2500 MFD	15 VDC	1.95
CF-6	4000 MFD	30 VDC	3.25
CF-19	500 MFD	50 VDC	1.95
CF-16	2000 MFD	50 VDC	3.25
CF-21	1200 MFD	90 VDC	3.25
CF-2	200 MFD	150 VDC	1.69
CF-10	500 MFD	200 VDC	3.25

Mounting clamps for above capacitors.....15c ea.

RECTIFIER TRANSFORMERS

All Primaries 115 VAC 50 60 Cycles

Type No.	Volts	Amps	Shpg. wt.	Price
XF15-12	15	12	7 lbs.	$ 3.95
TXF36-2	36	2	6 lbs.	4.95
TXF36-5	36	5	8 lbs.	6.50
TXF36-10	36	10	12 lbs.	9.95
TXF36-15	36	15	20 lbs.	11.95
TXF36-20	36	20	25 lbs.	17.95
XFC18-14	18 VCT	14	10 lbs.	6.95

All TXF Types are Tapped to Deliver 32, 34, 36 volts. XFC Type is Tapped to Deliver 16, 17, 18 Volts Center-tapped.

RECTIFIER CHOKES

Type No.	Hy.	Amps	DC Res	Price
HY5A	.028	5	.20	$5.25
HY10A	.014	10	.04	9.95
HY20A	.007	20	.02	13.95

Quad-Green COMPANY
71-2 Warren St. New York 7 N. Y.
Phone: BEekman 3-7385-6

DEPENDABILITY IN ELECTRONICS

WE ARE NATIONAL DISTRIBUTORS OF PARTS, TUBES AND EQUIPMENT. WE SOLICIT INQUIRIES FROM ORGANIZATIONS WHO APPRECIATE INTELLIGENT SERVICE AND HONEST PRICES, PARTICULARLY AT THESE CRITICAL TIMES.

NORMAN RADIO DISTRIBUTORS INC.
94-29 MERRICK BOULEVARD JAMAICA, N.Y. - REpublic 9-4651

CALLING ALL ENGINEERS!



TELEVISION CAMERA

3350 line resolution. Easily converted to present RMA standards. Circuits available with camera. Complete, like new.

WE HAVE

APS-4 RADAR
APS-6 RADAR

MARK-16 RADAR COMPLETE

MARINE RADIO UNIT FT 102 (167BY Transmitter) 200 W. 4 bands covering range of 2-24 mc. NEW.

BC-1100-A TRANSMITTER with remote control. 125 W. 115 VDC or AC.

BC-452 TRANSMITTER
300 W. 1.5-7.0 mc. Point-to-point and air warning. A1, A2 and A3 emission. 115 and 230 V.

RC-184 IFF EQUIPMENT
Brand new. Complete.

COMPLETE LINE OF TEST EQUIPMENT SUCH AS:

TS-36/AP TS-117 WAVE METER
TS-35/AP TS-102A/AP
TS-108 TS-12/AP (Units 1 & 2)
1—177 HICKOK TUBE CHECKER
TS-184A/AP

WE ARE LOOKING FOR: ALL TYPES OF RADAR, GROUND and AIRCRAFT RADIO EQUIP.

We Want: BC-348, ARC-1, MN 62, BC-1000, ART-13, RTA-1B, R5A/ARN7

TELL US: WHAT YOU HAVE.

COLUMBIA ELECTRONICS LTD.
524 S. SAN PEDRO ST.
LOS ANGELES 13, CALIF.
Cable Address: COELECT

D.C. MICROAMMETERS

0-200 ua 2" sq. G.E. DO 50.....$ 8.00
0-100 ua 3" sq. G.E. DO 50..... 10.00
0-50 ua 3" sq. G.E. DO 50..... 12.00

R.F. MILLIAMMETERS

0-115 Ma 3½" Weston 425.....$12.00
0-100 Ma 3½" Weston 425..... 12.00

PRECISION PORTABLE INSTRUMENTS
Single or multi-range
D.C. Microammeters, from 5 ua full scale. Thermo-couple Milliammeters, from 1.5 Ma. Thermo-couple voltmeters.

Precision Electrical Instrument Co.
146 Grand Street New York 13, N. Y.

MAIL ORDER ADDRESS
1060-2 N. ALLEN AVE.
PASADENA 7, CALIF.
SYCAMORE 4-7156
RYAN 1-8271

PHOTOCON SALES

JANUARY SPECIALS

Write for Our Latest Sales Bulletins

RETAIL SALES STORE
1240 EAST COLORADO ST.
PASADENA 1, CALIF.
SYCAMORE 6-7217

TEST EQUIPMENT

Hickock Oscilloscope Model 195.....NEW $160.00
BC-1060 Oscillograph—Same as Dumont #224 LIKE NEW 175.00
TS-34/AP Oscilloscope—Like New—with case. 350.00
TS-100/AP Oscilloscope .....EXCELLENT 75.00
TS-224 Dumont Oscillograph....GOOD USED 170.00
Leeds and Northrup Wheatstone Bridge, Type S .....LIKE NEW 75.50
Hickock Audio Oscillator #198, 20-20,000 C.P.S. .....EXCELLENT 40.00
Megger—50 megs—500 volts.....EXCELLENT 75.00
Insulation Tester—Superior Model 610B, 200 megohms, Complete .....NEW 49.00
I-100A Test Set for ARN7 and 269 Compass LIKE NEW 595.00
BCA Voltohmyst .....LIKE NEW 89.00
BCA Voltohmyst Jr. .....EXCELLENT 38.00
IE-19A Test Set for SCR522—Complete with manual, original factory packing.....NEW 325.00
LM Frequency Meter with calibration books, crystal, tubes .....EXCELLENT 79.50
BC-221 Frequency Meters, Complete with calibration books, crystal, tubes..EXCELLENT 99.50
I-222 Signal Generator .....EXCELLENT 75.00
TS-16/APN Test Set.....GOOD CONDITION 47.50
TS-89/AP Voltage Divider.GOOD CONDITION 29.50
RF Standard Signal Oscillator, 9.5K.C. to 50MC. Similar to G.R. 605B—Less power supply .....EXCELLENT 295.00
Brown Instrument Co. Circular Chart Recorder —0-500°F. Iron C.....NEW 150.00
TS-323/UR Frequency Meter—Calibrated and complete .....NEW 400.00
Standard Signal Generator—Measurements Corporation—Model 78-E, 50-75MC LIKE NEW 75.00
Model 78-B, 15-25MC., 190-230MC. LIKE NEW 100.00
Frequency Meter, Type CRB 60028, 236-256MC., P.O. YL Equip. Cavity tuner .....EXCELLENT 29.50
Tube Checker—General Electric Type TC-3. .....EXCELLENT 39.00
I-155A Test Unit for BC-958 Transmitter .....EXCELLENT 9.95
McMurdo-Silver Model 904 Capacitance Resistance Bridge with manual.....NEW 29.50
Tube Checker—Model CGI-60067—115V., 60 cycle .....EXCELLENT 49.50
Calibrator—I-200—115V. 60 cycle.LIKE NEW 29.50
BC-1255A Heterodyne Monitor 75-150MC..... 9.95
I-196 Signal Generator 8-15MC.....NEW 39.50
TS-159/TPX—Test Set 150-200MC .....EXCELLENT 49.50
Sweep Generator—Model M for AN/APG13. Made by M.I.T. Radiation Laboratory .....EXCELLENT 79.50
TS-110/AP Test Set..... 29.50
Navy Test Receiver—Type CPR 60AAB for use with ABD and ABK equipment..... 27.00
General Electric Contact Making Voltmeter Type T8H-20 ..... 39.50
General Electric Ammeter with shunt DB-12, 0-3000 amps D.C..... 49.50
Westinghouse Ammeter Type EX with shunt 0-1200 amps D.C..... 29.50
Weston Model 506 Voltmeter 0-20,000 Volts with 4 Model 505 multipliers.....NEW 39.50
I-236 Test Set.....NEW 2.95
I-149 Test Set.....EXCELLENT 29.50
Radar Converter & Range Plan Position Indicator Type CPIM-53ACW Range 0-16,000 yds and 0-48,000 yds..... 79.50
LU-1Radar Test Set.....NEW 79.50
ABD Scopes—Contains 5FP7....EXCELLENT 2.95
Insulation Tester—Interstate Mfg. Co. Model 1000 .....EXCELLENT 80.00
BC-906 Frequency Meter .....EXCELLENT 17.50
Output Meter CWI 60ABJ, 115V. 60 cycles, F.O. ABB Radar with manual...LIKE NEW 49.50
I-99 Test Set.....EXCELLENT 9.95
I-130A Signal Generator for SCR522 .....EXCELLENT 49.50
TS-80/U Test Meter 0-1 ma. for ARC-1..... 12.95
Engine Cylinder Thermometer Tester—Mark II, Wheelco Inst. Co., Iron-Constantan, Copper-Constantan 0-350°C. .....EXCELLENT 75.00
Engine Cylinder Thermometer Tester—Wheelco Inst. Co., Iron-Constantan, Copper Constantan, Chromel-Alumel 0-1400°C EXCELLENT 95.00
TS-24A/ARR2 Test Oscillator...EXCELLENT 29.50
I-196B Signal Generator 14.50

Weston Tachometer Generator Model 734 Type C .....GOOD USED 12.95
Weston Electrical Tachometer Model 545 for use with 724 Generator 0-2000 RPM Radio 2:1 .....NEW 14.50

I-104A Test Unit..... 14.50
TS-184/AP Signal Generator.....USED 60.00
NEW 95.00
Thermistor Bridge—Calibrated.....NEW 49.50
Output Meter CWI-60AAF with cables and case .....NEW 47.00
BC-438 Frequency Meter 194-216MC. GOOD CONDITION 25.00

TRANSMITTERS-RECEIVERS

BC-348—24V. D.C. Aircraft Receiver .....EXCELLENT 125.00
ARC-1 10 channel transmitter-receiver V.H.F. Complete with tubes, mountings, remote .....EXCELLENT 595.00
ART-13 Transmitter complete installations with dynamotor, loading units, remote, etc. 350.00
ATC Transmitter (Navy ART-13) complete installations with dynamotor, loading units, remotes, etc. 250.00
SCR-522 Transmitter-Receiver Sets—Complete with PE-94 dynamotor, BC-602 Control Box, BC-631 Jack Box, AN-104A Antenna, plugs, racks and mounts. New Accessories. .....EXCELLENT 70.00

Mine Detector SCR625 for locating metal, underground pipes, prospecting, etc. With Manuals .....GOOD USED 39.50
NEW 69.50

BC-375 Transmitters Complete with tuning units, plugs, dynamotors, mountings, microphones. Export packed.....LIKE NEW 89.50
ATD Transmitter 540-9050KC. 50 watt CW and phone. Complete with tubes, coils, dynamotor .....NEW 95.00
BC-222 Walkie-Talkie—Frequency 28-52MC. with crystal; less tubes, battery, and antenna. .....NEW 14.50
FT-167BY Federal Transmitter, operating shelf, tubes, crystals. Frequency range 2-24MC. .....NEW 195.00
R5/ARN7 Compass—Complete installation .....EXCELLENT 95.00
BC-464 Target Receiver—5 channel remote, sensitive relays, battery case, antenna—68-73MC. .....BRAND NEW 14.95

ONAN MOTOR GENERATOR SET
M 3 075-G-1
Generates: 115 V. AC 5.3 amps 26 V. DC 100 watts 480 cyc 3.8 amps.
Motor: 115-230 V. 60 cycle, single phase, 3450 RPM-10.5 amps. NEW.....$170.00

APR5AX Receiver .....LIKE NEW 325.00
RME45 Receiver with speaker....EXCELLENT 125.00
Hallicrafters S-36 Receiver 27.8-143MC. AM-FM .....EXCELLENT 200.00
Hallicrafters S-51 Marine Receiver.....NEW 125.00
ARB-5 Receiver 27.8-143MC. AM-FM .....EXCELLENT 95.00
RU-19 Receivers—Complete.....NEW 27.50
BC-611 Handie Talkie....NEW & LIKE NEW 65.00
RA-10 Bendix Compass Receivers..LIKE NEW 24.50
BC-610D Transmitter—500 watt—tubes & speech amp. .....GOOD CONDITION 675.00
BC-640 Transmitter—50 watt rack type—Same Frequency as SCR522...GOOD CONDITION 695.00

PLUGS
PLQ-171, PL-172, PLQ-60, PLQ-63, PL-147, PL-148, PL-151, PL-152, PL-153, PL-154, PL-156, PLQ-162, Plugs for ARC-1, ARC-3, ARC-5, BC-375, SCR-522, BC-348, GF-8, GF-7, LM Frequency Meters, and many others.

I-KVA Sola Constant Voltage Transformer—115V. 60 cycles..... 79.50
APN-1 Altimeter Indicator, basic movement 0-1ma., 5ma. shunt, 270° dial. An excellent basic movement for constructing meters. General Electric .....NEW 1.95
Crystal and Coil Sets for Handy-Talkie—3885, 4280, 4840, 5337.5, 5437.5, 5500K.C.—3 crystals and 2 coils per set.....SET 1.95

HS-33 Hi Imp Headset with ear cushions
NEW 2.45

Sound powered head and chest sets—manufactured by U. S. Instrument Co. Excellent used .....4.95 per set
per pair 8.50
Pair used .....2.95 per set
per pair 5.00
T-24 Hand Mike—Can be used with BC-222 Walkie-Talkie .....NEW 1.95
.....EXCELLENT USED 1.50
Speaker Special—6" P.M. Compartment type, waterproof, 25W. 8.50

CD-605 Cords—6 ft. tinsel rubber covered.NEW .15
Matching Transformer for HS-30 Headset. NEW .40
T-30 Throat microphone..... NEW .30
RM-29A Remote Control Units for telephones, etc. .....NEW 8.00

Teletype Paper—8½" wide x 3⅛" dia. rolls —White—single .....roll .50

Hand Keys for transmitting, code..... .80
Bassett Aircraft Radio Transmitter-Receiver, 1½ watt, tubes, crystal, battery case, antenna (MC-6) .....NEW 31.50
Bassett Aircraft Beacon Receiver—range, weather, tower frequencies .....NEW $3.50
FL-8 Range Filters.....NEW 1.95
Line Filter for ARC-5—FS/AB.....NEW 1.95
BC-709 Interphone Amplifier, tubes, battery operated .....NEW 4.50
MR-9F Bendix Remote Control Unit for RA-10 Receiver 9.00

Selsyn Transmitter—Pioneer Inst.—AY-14 Excellent for indicator applications .....EXCELLENT 3.50
Low Inertia Motor Type No. 10047-2A 24 volt—Pioneer Inst. Precision type..... 2.50

PE-94 Dynamotor Power Supply for SCR-522 .....USED 2.50
.....NEW 4.50
PE-206 Inverter 800 cycle—Will power APN4 and APN9 24V. D.C. Input.....USED 3.75
.....NEW 5.95
RA-62 Rectifier Power Supply for SCR-522—115V. A.C. .....LIKE NEW 120.00
PE-73 Dynamotor Power Supply for BC-375—1000V. D.C. Output .....EXCELLENT 4.95
Welding Type Transformer—105/110/115V. 60 cycle Input 190 amperes—5V. output—Amertran .....EXCELLENT 18.50
Transformer—6200V. @ 325ma. easily C.T. for 3100-0-3100 @ 650MA.—Primary 105/110/115V. 60 cycle—Amertran.....NEW 39.50

HIGH VOLTAGE OIL CAPACITORS—BRAND NEW
1. mfd 15,000 WVDC.....$14.95
25 mfd. 2000 volt Photoflash..... 10.00
.65 mfd. 12,500 VDVC..... 12.95
.02 mfd. 20,000 WVDC..... 4.95
.5 mfd. 25,000 WVDC..... 14.50
1. mfd. 6000 WVDC..... 5.95
We have hundreds of new oil and high voltage mica capacitors. Send us your requirements.

Glide Path Transmitter CDE-52220—P.O. TC-1 Equipment .....EXCELLENT 375.00
Delco Motor—27 volts 2.4 amps—5600 RPM Constant Speed Model A-7155 Governor Type —Shunt .....NEW 8.95
HS-38 Headset with plug.....NEW 1.75
GSAP—6mm Camera—Excellent Condition with lense 16MM. Standard 50 ft. magaine type Unconverted 20.00
Converted with viewfinder, exposure guide, handle, battery case, etc..... 39.50

TUBES IN STOCK
CLEAN BULK BOXED

We Have Thousands of Unlisted Tubes.....Send Us Your Requirements.

3BP1	$1.95	6H8G	$.90	726A	$5.00
3EP1	1.95	6C4	.90	801A	.75
3FP7	1.00	6E5	.90	803	2.95
5AP1	1.95	6SL7	1.95	849	24.00
5BP1	1.95	6SN7GT	2.00	851	12.50
5BP4	2.50	6SN7W	2.20	860	4.95
5FP7	1.00	6SQ7	.70	872	.50
5SP1	2.50	6U5	.90	872A	1.00
7BP7	2.95	6V6	.95	6H6GT	.90
2C26	.20	6V6	1.25	6J5	.75
2C34	1.00	6V6GT	1.20	6J6	1.50
2E22	1.00	12A6	.35	6L6	1.50
2J21	5.00	12H6	.75	6L6G	1.25
2J21A	5.00	12K8	.60	6L6GT	1.25
2J22	5.00	12SH7	.50	6L7	.75
2J26	5.00	12SJ7	.50	6SA7	.75
2J27	5.00	12SR7	.50	6SF7	.75
2J30	50.00	GL446B	2.95	6SG7	.90
2J32	7.50	12X2	.20	6SH7	.70
2X2	.75	23D4	.40	6SJ7	.70
2X2A	1.10	RK34	1.00	866	1.95
3D6	.25	RKR72	.45	876	.25
3Q5GT	.55	RKR73	.45	891	75.00
5T4	1.20	VR150	1.00	954	.10
5U4G	1.00	VT4C	.30	955	.20
5Y3GT	1.00	VT99BR	19.50	957	.25
5Y3G	1.00	VT158	9.50	958	.20
5Z3	.90	WL530	15.00	1616	.30
6A8	.85	WL532	1.50	1625	.25
6AB7	.75	211	.30	1626	.25
6AC7	2.00	307A	3.95	1629	.25
6AJ5	1.25	316A	.35	7193	.20
6AG5	1.30	371B	.25	8012	.50
6AG7	1.60	717A	.40	9004	.25
				9006	.30

TERMS: Prices f.o.b. Pasadena. 25% on all C.O.D. orders. Californians add 3% Sales Tax.

NEW YORK'S RADIO TUBE EXCHANGE

TYPE	PRICE	TYPE	PRICE	TYPE	PRICE
OA2	$3.00	2V3G	$2.10	274B	$3.00
OA3	1.50	3A5	1.25	304TH	9.00
OA4G	1.25	3B24	3.50	307A	4.95
OB2	3.00	3B24W	5.50	310A	7.95
OC3	1.00	EL3C	2.95	311A	2.95
OD3	1.00	3C22	49.50	312A	3.95
1A3	1.00	3C23	5.95	327A	2.95
C1A	4.95	3C24	2.50	331A	3.95
C1B	4.95	3C45	11.45	350A	3.95
1B21A	2.75	3DP1/A	2.95	350B	2.95
1B22	3.95	3E29	12.50	357A	37.50
1B23	7.95	5N4	5.50	368AS	2.95
1B24	7.95	4A1	1.75	371B	.95
1B26	1.95	4C27	10.80	385A	4.95
1B27	7.95	4J25	99.00	386A	2.95
1B32	1.10	4J26	99.00	393A	5.95
1B38	33.00	4J30	220.00	394A	5.95
1B42	5.95	4J31	99.00	MX4695U	.75
1B56	49.95	4J37	99.00	417A	7.95
1B60	4.95	4J38	89.00	434A	4.95
1N21	1.35	4J39	99.00	446A	1.95
1N21A	1.75	4J41	99.00	446B	2.95
1N22	1.75	4J57	99.00	450TL	35.00
1N23	2.00	4J62	99.00	464A	6.95
1N23A	2.75	C8B	2.95	471A	2.75
1N23B	5.00	5BP4	3.95	527	35.00
1N26	5.00	5CP1	2.95	WL530	12.50
1N27	5.00	5D21	15.00	WL531	3.50
1N48	1.00	5J23	45.00	701A	3.50
1S21	3.95	5J29	9.95	703A	2.95
2AP1	3.95	5JP1	27.50	705A	2.95
2B26	1.75	5JP2	7.50	706AY	18.00
2C34	.35	5JP4	12.50	706CY	18.00
2C40	5.75	5LP1	15.00	707A	7.95
2C43	21.00	6C21	39.50	714AY	5.95
2C44	.99	C6A	3.95	715A	7.95
2C51	5.95	7DP7	5.95	715B	9.95
2D21	1.75	7DP4	10.00	715C	25.00
2E22	3.75	12AP4	85.00	717A	.75
2E30	2.25	15E	1.95	718AY/EY	18.00
2F21	10.00	15R	.95	720A/B, C/D/Y	95.00
2G21A	9.95	NE16	.45	721A	2.95
2G22	9.95	FG17	3.95	722A	1.95
2J26	7.75	RK21	2.95	723A/B	14.95
2J27	12.50	RK39	2.95	724A	2.95
2J31	19.95	RK60	1.95	724B	3.95
2J32	19.95	RK72	1.95	725A	6.95
2J36	105.00	RK73	1.95	726A	6.95
2J38	7.95	FG95	10.00	726B	26.00
2J42	150.00	100TH	9.00	726C	69.00
2J49	69.00	FG105	19.00	728AY	27.00
2J50	39.50	F123	8.95		
2J61	45.00	FG172	27.50		
2J62	45.00	203A	5.95		
2K25	27.50	211	.75		
2K26	27.50	217C	18.00		
2K29	27.50	242C	10.00		
2K39	97.50	249C	4.95		
2K45	299.50	250TL	19.95		

TYPE	PRICE	TYPE	PRICE
720A	$8.95	876	$ .90
800	1.00	878	1.95
801A	1.00	884	1.95
802	3.60	885	1.75
803	2.95	889R	99.50
804	6.95	913	9.95
805	2.95	914	75.00
806	12.00	931A	7.95
807	1.60	954	.15
808	.95	955	.55
809	2.45	956	.69
810	11.00	957	.19
812	2.95	958A	.49
813	7.95	959	.69
814	3.95	975A	12.95
815	3.25	991	.45
827R	27.50	1288	1.95
829	6.95	1611	1.95
829A	8.95	1613	1.08
829B	11.95	1616	1.98
832	8.95	1619	.35
832A	9.95	1620	4.95
833A	39.95	1622	2.75
834	7.95	1624	1.00
836	1.95	1625	.48
837	1.95	1851	1.95
838	2.95	8012	1.25
845	5.95	8013	6.95
849	22.50	8014A	24.95
851	29.50	8020	1.50
860	2.95	8025	6.95
861	29.50	9001	1.75
866A	1.79	9002	1.50
869B	29.50	9003	1.75
872A	2.95	9005	.75
874	1.50	9006	1.00
		9006	.35

350A is a long life WE807

350B is a long life WE6L6G

WE 701A can be used for a Super 813

$10 Minimum Order

TEST EQUIPMENT

Microwave K Band 2400 MC.

TSK1-SE Spectrum Analyzer
K Band Flap Attenuator

X Band

TSX-4SE Spectrum Analyzer
TS 12 Unit 1 VSWR Measuring Amplifier, 2 channel
TS 12 Unit 2 Plumbing for above TS13
TS16AA VSWR Measuring Amplifier Navy type TS 12 Unit 1
TAA-11BL VSWR Measuring Amplifier, Browning
TS 33 X Band Power and Frequency Meter
TS 35 X Band Pulsed Signal Generator
TS 36 X Band Power Meter
TS 45 X Band Signal Generator
TS 148 X Band Signal Generator
TS 263 Navy Version of TS 148
TS 108
X Band Magic T Plumbing
X Band Tunable Crystal Mounts

S Band

TS3A/AP S Band Power and Frequency Meter
RF 4 Electrically Tuned S Band Echo Box
BC 1277/60ASQ S Band Pulsed Signal Generator
PE 102 High Power S Band Signal Generator

L Band

Hazeltine 1030 Signal Generator 145 to 235 Megacycles
Measurements Corp. type 84 Standard Signal Generator
TS 47, 40 to 400 MC Signal Generator

Broadcast Wave Bands

162C Rider Chanalyst
Short Wave Adapter for 162C
Ferris 22A, Signal Generator
TS 174 Signal

Oscilloscopes

BC 1287A used in LZ sets
TS 34 Oscilliscopes WE
Supreme 564

Audio Frequencies

RCA Audio Chanalyst
Hewlett Packard

Other test Equipment and Meters

TS 15/A Magnet Flux Meter
General Radio V T Voltmeter 728A
Calibrator WE 1-147
UHF Radio Noise & Field Strength Meter Measurements Corp type 58
General Radio 1000 cycles type 213
Limit Bridges
Boonton Standard Inductances
Weston Meters types 430, 429, 741
Model 40 Pyrometer
Rawson, meters 0-10 Microampere 0-2 Millivolt

RADAR Sets & Parts

APS 3—APS 4—SCR 284
R-111/APR5A Receivers

LIBERTY ELECTRONICS, INC.

PHONE WORTH 4-8262 — 135 LIBERTY ST., NEW YORK 6, N.Y.

THE BEST IN ELECTRONIC SURPLUS!

250 W. & 500 W. PUBLIC ADDRESS SYSTEMS FOR CIVILIAN DEFENSE

For Fixed or Portable-Mobile installations, where giant power requirements must be met. Both types, HLAS (500W.) and BEACHMASTER (250W.), are rugged Western Electric design and manufacture. Available with spares, if desired. New equipment, complete ready for service. WRITE FOR PRICES AND DESCRIPTIVE SHEETS.

MISCELLANEOUS BARGAINS!

"SNOOPERSCOPE" TUBE

Infra-Red Image Converter Tube (British) to make "Snooperscopes," "Sniperscopes," and other devices that see in the dark. Has many useful industrial applications. Operates with invisible infra-red rays, without scanning or amplifiers. Supplied with technical data and diagrams. Every tube guaranteed
EACH $4.95
6 for $25.00

BAUSCH & LOMB Front-End Lens Assembly, for best images, F2.1, 3.5 in. E.F. EACH $10.00
MOUNTED LENS UNIT, also for front-end, results as good as B & L unit. Speed F1.9 f. 1, 91.44mm, outside dia. at one end 60 mm. length of mount 64 mm. PRICE, EACH $7.00

General Electric Amplidyne M.G. Set, generator type #V-5875677, motor type #73AB58, Navy #CQ-21ABU, 115/230 V., 60 cycles, motor rated at ¾ HP, generator output 250 V. DC at 375 watts. NEW. PRICE, EACH $60.00

AVAILABLE FOR IMMEDIATE DELIVERY

BC-610 Transmitters, w/BC-614 Speech Amplifiers, 1.5 to 30 mc, 300 Watts Phone, 400 Watts CW.

TCS (Collins) Transmitter-Receivers, 1.5 to 14.0 mc, 20 watts phone and 40 watts CW. Operation 12/24 V. DC. COMPLETE with all accessories, excellent condition equipment.

SHIP TRANSMITTERS, RMCA MODELS 8010 & 8019, Intermediate and High Frequency units. 200 Watts output. Also, emergency transmitters, gate-alarms, antenna strain insulators, stand-offs, deck-entrance, etc. Large Savings to shipyards, steamship lines, and service organizations.

SHIP RADAR. Write for our listing.

Telephone: LOngacre 4-4490

TELEMARINE COMMUNICATIONS COMPANY
540 W. 27TH STREET, NEW YORK 1, N. Y.

Cable Address: TELEMARINE

10 MFD . . . . . 400 VOLTS . . . . . 57 CENTS

Although rated at 400V against an operating temperature of 72°C, these nationally famous 8+8 MFD capacitors will meet all commercial specifications and operate at 600V provided that the operating temperature does not exceed 40°C. Measuring 3 5/16 x 2 x 5 25/32 and packed 24 to a carton, weighing 42 pounds this item fills the need for an excellent filter and power correction device. Long lasting, extremely low in dielectric leakage and available in sufficient quantity for a large manufacturer. Small quantities—$.87. Carton quantities—$.45. Samples upon request.

WESTON LABORATORIES — Weston 93, Massachusetts

SHEET METAL MACHINERY

NEW and Used—Brakes—Shears
Forming Rolls — Folders — Punches — Di-Acro, Pexto, Niagara & Whitney Equipment.

B. D. BROOKS CO., INC.
HAncock 6-8200
381 Atlantic Ave., Boston 10, Mass.

2C40 TUBES New and unused manufacturer's surplus stock.

Individually boxed, tested and guaranteed. In lots 25 or more—$2.35 each postpaid.

RADIO MART 19749 Riverview Ave. Rocky River, Ohio

WESTINGHOUSE HIPERSIL CORES

OVER 20,000 UNITS IN SEVERAL DIMENSIONS. AVAILABLE FOR IMMEDIATE DELIVERY. SEND FOR LIST WITH COMPLETE DESCRIPTIONS.

RAYTHEON MFG. CO.
Surplus Sales Dept. Waltham, Mass.
Tel. Waltham 5-5860—Ext. 2

CHECK THESE MONEY-SAVING SURPLUS "BUYS"!

TRANSFORMER VALUES

All 115 V, 60 Cy. unless otherwise listed.

Compare These Prices!

STANCOR P-4088 FILAMENT TRANSFORMER Secondary 5 Volts C.T. 14 amps. Cased Heavy duty. 10 KV. Insulation $4.95

THERMADOR I-29 FILAMENT TRANSFORMER Secondary 5 Volts C.T. 20 amps. 10KV insulation. Cases. Heavy duty $5.39

UTC LS-183 POWER TRANSFORMER, 3500-300 CT at 450 MA. 110 or 220 Primary $24.50

UTC LS-184 POWER TRANSFORMER, 7000-6000-5000, CT at 500 MA 110 or 220 Primary $69.50

UTC LS-191 POWER TRANSFORMER, 650-500 at 125 MA. 3 filament windings, tapped primary. $5.95

UTC LS-73 POWER TRANSFORMER 1000-800 CT at 500 MA. 140 CT at 50 MA. 5 filament windings. Tapped primary $12.95

THORDARSON T21F20 FILAMENT TRANSFORMER. Primary 115 V., 60 cycles. Secondary 5 V. center tapped. 15 amps. 10,000 V. insulation $3.95

SCOPE TRANSFORMERS

THORARDSON T17R32	HERCULES 115 V. 60
Primary 115 v., 60 cycles. Secondary 2300 v., 2½ v., 2½ v., Shielded $3.95	cycles primary 1800 V., Secondary 6.3, 2.5, 2.5. Shielded $5.95

THERMADOR SPECIAL TRANSFORMERS

Built for Government Laboratory use. All hermetically sealed with glass terminals. CS5727, 900, CS5729, 800 V., CS5730, 1000 V 700 V CT at 150 650 CT at 100 850 V ct at 250 MA. 3 filament ma. 3 filament windings. 6.3-windings. 6.3-6A, 3A, 3-3A, 5 6.3-A. 6.3-1.5A, 6.3-2A, 6.3-4A, 2-2.5 A. Shp. Wt. 20 lbs. Shp. Wt. 14 Lbs. Shp. Wt. 25 lbs. $3.50 $3.95 $4.50

SPECIAL VALUE!

- STANCOR ISOLATION & STEP-DOWN TRANSFORMER No. P-5065, Primary 220-230 volts, 50-60 cycle. Secondary 110-125 volts, 250-300 watts.
- THORARDSON T18V22 LINE VOLTAGE REGULATOR 95, 105, 125V to 115 V 60 cycle. Complete with cord and plug. 250 VA.
- THERMADOR CS 10535 ISOLATION TRANSFORMER 105, 115, 125 v to 115 v 60 cycles. Complete with cord and plug. 250 va.

YOUR CHOICE **$6.69 Ea.** BRAND NEW

NOISE FILTERS BARGAIN PRICED

made especially for industrial use

Miller 7841, 5-amps $4.95
Miller 7842, 10-amps $5.95
Miller 7843, 20-amps $6.95

Max. 220 v. Write for complete information.

OHMITE Power Tap CERAMIC SWITCHES

Non-shorting type ceramic tap switches for high current use. Available in 5, 6, 7, 8, 9, 10, and 11 contacts.

Your Choice **98c Ea.**

Brand New! AMPHENOL AN CONNECTORS 75% OFF LIST! Write for complete listing

MIDGET VARIABLE CONDENSERS

MC-20-MX 20 MMF. Double Spaced ..... 79¢
MC-50-SC 50 MMF Double Spaced ..... 79¢
MCD-50-M 50 MMF Split Stator $1.40
SSD-50, 50-50 Split Stator $1.40

TS323/U FREQUENCY METER CASES

These are all brand new and a wonderful bargain at this low price. See Oct. 1950 issue of QST for construction article.

First Time Offered! **$3.95** Ea.

THORDARSON SWINGING CHOKE

T-19-C-38 5-20H, 500 ma. All brand new. In original wooden boxes. **$8.95**

JUST ARRIVED! A Real Value Scoop! WESTON AIRCRAFT METERS

A real precision 1-mil movement, zero center aircraft instrument. Orig. gov't cost $32.50. Wonderful for field strength meters, grid-dip meters, tuning meters, beam antenna indicators, vacuum tube volt meter. 2" bakelite case. Brand New. While they last!

$1.95 ea. Postpaid in U.S.A.

Check This List! Part of Our Complete TEST EQUIPMENT

All available direct from stock and ready for immediate shipment. Write, wire or telephone your orders and request for prices and information!

TS-18/AP
TS-14/AP
TS-16/AP
TS-23/AP
TS-33/AP
TS-33/APCY24
TS-36/AP
TS-41/CRN-1
TS-45/APM-3
TS-47/APR
TS-58/APM
TS-61/AP
TS-62/AP
TS-74/UPM
TS-89
TS-92/AP
TS-100/AP
TS-110/AP
TS-126/AP
TS-131/AP
TS-143/CPN-1
TS-164/AR
TS-170/ARN-5
TS-175
TS-189
TS-192/CPM-4
TS-204
TS-233/TPN-2
TS-278/AP
IE-19 Test Set
IE-46B
I-72-J Signal Generator
78-D Signal Generator
I-63-F Test Set Dynamotor
I-64-A Test Set Dynamotor
I-65-B
I-65-A
I-100
I-104-A
I-122-B Signal Generator
I-126 Signal Generator
I-148 Signal Generator
I-151A Signal Generator
I-196 Test Oscillators
I-222 Signal Generators
5" Oscilloscopes—General Electric
AN/CRM-3 Test Set or BC-733D
BC-376 Marker Beacon Trans.
BC-221 Freq. Meters
Bc-67
Bc-783 Course Director Test Set
Bc-784 Course Director Test Set
224 Dumont Scopes
Plus many, many others, not listed

ORDER DIRECT FROM THIS AD

Prompt shipment of all orders. Cash with order. Minimum order $3.00. 25% deposit on all C.O.D. orders. Shipments by truck or RR Express collect. California buyers please add state sales tax. All prices subject to change. All merchandise subject to prior sale.

ALVARADIO SUPPLY CO.

Dept. L-9, 341 S. Vermont Ave., Los Angeles 5, Calif., DUnkirk 8-2211

TRANSCONDUCTANCE TUBE TESTER

A proportional mutual conductance tester which is ideally suited for production, research and similar testing where versatility and a Gm test is essential.

The Weston 788 unit is composed of 3 separate & removable components:

SOCKET and PLUG PANEL consisting of 9 standard sockets: 4 pin, 5 pin, 6 pin, combination large & small 7 pin, 8 pin loktal, 8 pin octal, miniature, acorn and a socket for testing Western Electric 215A peanut tubes. All pins are wired and numbered with leads terminating at a numbered plug board. Additional sockets, plugs, etc. can be added and connected to the standard pin wiring as required.

TUBE TESTING SECTION consisting of a multiramge A.C. Heater, Voltage meter, and Element Voltmeter and a Percentage Mutual Conductance Indicating meter. Completely wired with appropriate automatic switches separate controlled heater voltage transformer, electrode transformer, controls, short indicator, etc. and a numbered plug board section with patch cords to connect to the tube socket panel. Operates on 115 volt 60 cycle.

U. S. NAVY MODEL OQ

WESTON MODEL 788

ROLL TYPE TUBE CHART showing tube, data, values, etc. with sufficient room to add information on new tubes or special data on research projects, etc.

This unit is particularly suited to special applications as THE THREE COMPONENTS ARE COMPLETELY INDEPENDENT OF EACH OTHER thus enabling the test section to be readily adaptable & interchangeable to operate with any or all tube bases and socket combinations desired.

Complete in oak carrying case, with manual showing theory, design diagrams, operating instructions, tube data, tube base connections & parts list. Dimensions approx. 13"W 24"L 8"H, weight approx. 35 lbs.

THESE UNITS ARE USED—GUARANTEED

ONLY $89.50

They are in excellent condition and appearance. They have all been thoroughly inspected, tested & refinished & are fully guaranteed to be in perfect operating condition and to give complete satisfaction. They are, of course, subject to your inspection & approval & may be returned for full credit if returned to us prepaid within 10 days of receipt.

U S N C V 49598 ADAPTER KIT

for

OD and OQ Test Sets

This adapter Kit consists of 4 special adapters and clip lead to enable the model OD and OQ Transconductance Tube Testers to accommodate radar tubes type 316A, 703A, 707A & B, 713A, 446 and similar tubes. Complete in portable oak chest (approx. 7" 4" 3") with instruction sheet and test data. Weston Model 9999. BRAND NEW ONLY $9.50

GASOLINE HEATER MOTOROLA

MODEL GN-3-2

An internal combustion type heater which will give 15,000 B.T.U. of heat per hour. Ideally suited for use with equipment, farms, boats, bungalows, cabins, trailers, work sheds, darkrooms, mobile equipment, transmitter stations, etc., and any place where a quick heat is required in volume.

Very economical in operation—tank holds one gallon of gasoline which is sufficient for 8 hours operation. Uses any grade gasoline.

This unit is designed primarily for aircraft installation, 24-28 volts D.C. but it can be readily adapted for a 115 or 230 volt 60 cycle power supply by use of a transformer and rectifier. Simple circuit diagram for adaption to 115 or 230 volts 60 cycle use supplied with each unit. Can be used on 32 volt farm or boat systems as is without the installation of additional transformers, etc. Power consumption approximately 75 to 100 watts.

Approximately 12" long x 8½" wide. Complete with technical manual and parts list. Made by Galvin (Motorola Mfg. Co.) YOUR COST ONLY $27.50

We specialize in electrical Instruments. Over 75,000 meters in stock. Send for our latest circular showing our complete line of Surplus-Now-Guaranteed meters.

MARITIME SWITCHBOARD

338 Canal St., N. Y. 13, N. Y.
Worth 4-8217

Orders accepted from rated concerns, public institutions and agencies on open account, others please send 25% deposit, balance C.O.D. or check with order. All prices FOB our warehouse, N.Y.C.

AVAILABLE FROM STOCK

HUGE INVENTORIES

AT LIFE ELECTRONICS SALES

½—1—2 WATT RESISTORS
5—10—20 WATT POWER RESISTORS
25 AND 50 WATT RHEOSTATS
POTENTIOMETERS

UG CONNECTORS AN CONNECTORS
UHF CONNECTORS COAXIAL CABLE

★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★

LIFE
ELECTRONIC SALES

345 Broadway New York 13, N. Y.
Digby 9-4154

★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★

RECEIVING AND TRANSMITTING TUBES
CRYSTAL DIODES
SOCKETS

REGULAR AND SILVERED
MICA CAPACITORS
TRANSMITTING MICA CAPACITORS
OIL CAPACITORS—ALL TYPES

3AG—4AG—8AG FUSES—FUSE HOLDERS

CONDENSERS

Ceramicons, micas, bathtubs, oils. Large quantities on hand for immediate shipment.

See our ads in October, November, December Electronics.

Inquiries solicited and promptly answered

MONMOUTH RADIO LABORATORIES
BOX 159 OAKHURST, N. J.

MIRROR — front surface aluminized on optical glass 1 3/16" diameter 9/32" thick .....$.50

PRECISION LEVEL — interior ground tube level with 4 adjusting screws. Overall length 1⅝", diam. 15/32". One end with shoulder ⅛" diam. $.85

DELCO BLOWER — sirocco type D.C. Flange diameter 3⅛" blade 3-3/16" RPM @ 12 volts 3400 RPM @ 6 volts 1600 .....$3.95

SELENIUM RECTIFIERS — G.E. model 6RS 5FB3 maximum. A.C. volts 56 D.C. amps. 0.150.....$1.35

SILVERPLATED REFLECTOR—Overall Dimensions 4⅝", Reflecting Surface 4¼", Depth 1⅜", Individually boxed 25¢ ea. $20.00 per 100.

Miniature lamp T1¾. 3 volt .19 amp. Airplane Indicator, Amb. Ctd.
10 for ..... .85
100 for $7.50

Lamp Assembly C208 Genl. 1 Made by Eastman Kodak with Iris Diaphragm 12 volt lamp .....each $1.95

TELECHRON B-3-4 watt Synchronous Motors 5/6 RPM on 50 cycles, 1 RPM on 60 cycles .....$3.50 ea.

SEND FOR FREE BULLETIN

Telephone Digby 9-2160-9

A. Cottone Company — Electronic Mechanical & Optical Components
236-240 Cable St., New York 2, N.Y.

ALL PRICES F.O.B. N. Y. CITY

"STANDARD" BRAND NEW SPECIALS

AMERTRAM TRANSTAT VOLTAGE REGULATOR: 2KVA; Pri: 90 to 130V. 50/60 CPS; Output: 115V @ 17.4A Maximum. Type RH.....$24.95 ea.

POWER TRANSFORMER, STANCOR: Pri: 115V 50/60 CPS Sec: 700V CT @ 100 MA; 5V. CT @ 3A; 6.3V @ 2.5A. Hermetically sealed rectangular can: 4¼" W x 4¾"D x 6"H.....Special $2.45 ea.

AUTO TRANSFORMER, RAYTHEON: Pri: 230V. 60 CPS: 1780V. RMS test. Sec: 115V, 26A. 7"W x 10"D x 10"H. Open frame construction .....$19.95 ea.

IN23A SYLVANIA SILICON CRYSTAL DIODE: 10,000 MC converter, Navy inspected, individually boxed.....98¢ each
10 for $9.00

250 MM PRECISION VERNIER CALIPERS: Inside and outside; Reads to 1/50 MM; Jaw depth 62 MM; highest quality construction; supplied with leatherette plush lined case; American Measuring Instruments Corp. Model 20.....$14.95 ea.

MICROAMMETER, TYPE RX35 WESTINGHOUSE; 0-500 ua; 3" rectangular bakelite case; 0-25 watt scale; Special $4.95 ea.

All items brand new, fully guaranteed, F.O.B. our plant N. Y. C.

Send for latest catalog, listing one of the largest surplus stocks, hundreds of hard to get items at lowest prices. Meters, fuses, fuse holders, switches, condensers, jacks, plugs, connectors, cables, etc., etc.

STANDARD RADIO-ELECTRICAL PRODUCTS

2260 WASHINGTON AVENUE
NEW YORK 57, NEW YORK
JUDSON 6-3764

Desirable

Select Surplus ELECTRONIC EQUIPMENT

	Price
• BC-375-E Aircraft transmitters complete, new, with all turning units, 24 volt dynamotor, tubes, plugs, etc.	$125.00
• BC-191 same as above for 12 volt operation	$125.00
• TDE Navy model radio transmitters with 230 volts, D.C. power supply, complete with tubes, ready for operation. New	$875.00
• SCR-522 Aircraft radio transmitters-receivers complete with dynamotor, control box, plugs, jackbox, microphone adapter, microphone, headset, extension cord. Newly overhauled, inspected and tested	$130.00
• SF Ships' radar units complete with all components	$500.00
•TCS, Collins type Navy and mobile type transmitters-receivers complete with remote control, antenna coil, cables, key, microphone, for 110 volt A.C. operation including set of parts. New in original cases	$1,275.00
• TCS Collins type, transmitters-receivers, same as above but without spare parts. Refinished, checked-out and guaranteed for operation on 12 or 24 volts D.C.	$575.00
• ET-8023-D1 Radiomarine Corporation telegraph transmitters	$375.00
• BC-348 Receivers, unconverted 24 volt operation	$150.00
• MN-26 Bendix radio compass receivers	$450.00
• BC-221 A.K. Frequency meters with modulation	$125.00
• BC-221 Frequency meters without modulation	$100.00
• LM-15 Frequency meters (Navy version of BC-221 A.K.) with modulation and A.C. power supply	$150.00
• I-100A Test sets for SCR-269	$750.00
• IE-19A Test set for SCR-522	$350.00
• ARP-5 high-frequency oscillators	Price on Application
• JWG-458 Gasoline-engine driven electric generating plants, 5000 watts, Onan, 100-120 or 220-240 volts, rebuilt-factory reconditioned	$580.00
• Telephone or power line insulators, glass Hemingray No. 42, heavy duty	.10
• W-110 B Army field telephone wire	$7.50
• RC-50-B Army Tape Facsimile transmitters-receivers	$250.00
• Link radio transmitters-receivers 1498 including remote control and antenna reconditioned.	Price on Application
• Link-50 UFS receivers, transmitters including remote control and antenna. New	Price on Application

ALL ITEMS ARE OFFERED F.O.B. OUR WAREHOUSE. AND ARE SUBJECT TO PRIOR SALE. ALL ITEMS ARE NEW, UNUSED SURPLUS UNLESS OTHERWISE INDICATED.

FRENCH-VAN BREEMS, Inc.

405 Lexington Avenue New York 17, N. Y.

BRAND NEW U.S. GOV'T. SURPLUS GUARANTEED

POWER RHEOSTATS

Ohms	watts	ea.	Ohms	watts	ea.
.5	25	.98	150	50	2.10
1	80	2.34	150	25	.98
.5	150	4.45	200	25	.98
2	80	2.34	200	100	3.29
2	100	3.51	225	50	2.10
2	225	9.60	250	25	1.86
3	200	6.32	300	50	2.11
3	100	3.51	300	100	3.29
3	225	9.60	350	25	.98
4	225	9.60	350	100	3.28
5	25	.98	370	25	.98
5	100	3.51	375	150	4.95
6	25	1.86	400	25	.98
6	80	2.10	400	75	4.89
6	75	4.80	400	75	.98
7	25	.98	500	75	4.80
8	50	1.24	500	100	3.29
10	25	1.86	525	150	5.51
10	100	3.28	750	25	1.86
12	25	1.86	750	150	4.45
15	25	.98	1000	25	.98
15	75	4.80	1000	150	4.45
15	100	3.29	1200	225	9.60
22	80	2.10	1250	50	2.22
25	25	1.86	1250	150	4.45
32	300	6.42	1500	50	2.22
50	25	.98	1800	150	4.68
50	50	2.10	2000	25	2.10
60	750	21.30	2000	50	1.24
60	25	.98	2500	50	2.22
75	25	.98	2500	100	3.51
75	75	4.80	3000	25	.98
75	150	4.21	3000	100	3.51
80	50	2.10	5000	25	2.22
80	500	9.13	5000	50	2.34
100	25	.98	7500	50	2.34
100	50	1.24	7500	100	3.98
100	100	3.29	10000	50	2.34
100	225	9.60	10000	100	4.21
125	25	1.86	15000	25	2.67
125	500	9.13	20000	150	6.32

Specify whether shaft required is for knob or screwdriver adjust.

SELECTOR SWITCHES

Pole	Pos.	Deck	Type	Each
1	11	1	Bak-n shtg	.69
1	21	3	bak-n shtg	.89
2	2	1	cer-shtg	.59
2	6	2	bak-n shtg	.69
2	11	2	bak-shtg	.75
3	4	1	cer-n/shtg	.53
6	3	2	Cer-n/shtg	.98
6	11	6	bak-n/shtg	1.95
10	5	5	cer-shtg	2.25
10	2	4	bak-n/shtg	1.35

(many other types in stock) e-7

"AN" CONNECTORS



LARGE VARIETY AVAILABLE AT GREAT SAVINGS

Send your specs and let us quote

BIRTCHER TUBE CLAMPS

#926-A #926-B #926-B1 #926-B2 #926-B7

25c.

#926-B22 #926-C #926-C1 #926-C5 #926-C10 #926-C24

MICROSWITCHES



A B C

A-#YZ-RS13 SPST 10a/125vac type "S" plunger, metal housing normally open..... .49

B-#B-RS10 SPDT 10a/125vac type "S" plunger, 2-circuits: one open and one closed..... .49

#WZ-RL8 (not illus.) SPST 10a 125 vac, leaf actuator, norm. closed..... .49

#R-RL2T (not illus.) SPST 10a 125 vac roller plunger, norm. closed..... .49

C-G.E. SWITCHETTE 10a/115voltsAC

#CR1070-C103A3 SPST closed... .49

#CR1070-C103E3 SPST open.... .49

#CR1070-C103R3 SPST closed... .49

#CR1070-C123C3 DPST op/cl.... .49

(Many other types in stock)

OIL CONDENSERS

Mfd	VDCW	Each
.1	3000	.98
.1	6000	1.89
.1	20,000	19.95
.25	3000	1.49
.5	1500	.59
1	600	.49
1	3000	1.95
2	400	.49
2	800	.59
2	1000	1.75
4	600	1.39
4	600	1.35
6	600	1.49
10	600	2.49
14	600	2.49
16	600	2.79
15	1000	4.95
2 x .1	7000	4.95
2 x .5	9000	16.95

BATHTUBS

mfd	vdcw	each
.033	400	.19
.05	200	.19
.05	400	.22
.05	600	.24
.1	400	.24
.1	600	.27
.1	1000	.35
.15	600	.27
.25	200	.22
.25	600	.28
.35	400	.28
.5	400	.28
.5	600	.38
.5	1000	.39
1	200	.35
1	600	.40
2	400	.46
2	600	.69
4	50	.25
6	500	.59
25	50	.31
25	75	.33
40	25	.44
50	25	.31
200	12	.49
500	6	.49
.05-.05	600	.33
.05-.05	1500	.55
.1-.05	200	.25
.1-.1	400	.32
.1-.1	600	.34
.16-.16	600	.34
.2-.2	600	.34
.25-.25	600	.34
.5-.5	600	.39
1.0-.1	300	.38
200-200	9	.55
3 x .05	600	.37
3 x .1	600	.42
3 x .1	600	.47
3 x .25	600	.50
3 x 1.0	100	.49

"UG" Connectors

UG-12/U	$1.10
UG-13/U	.85
UG-18/U	1.15
UG-19/U	1.15
UG-21/U	.98
UG-22/U	1.05
UG-24/U	1.10
UG-25/U	1.15
UG-27/U	1.75
UG-57/U	.89
UG-58/U	.63
UG-125/U	.49

SHOCKMOUNTS

100P-1	1 lb.	.10
100P2	2 lb.	.10
100PR-2	2 lb.	.10
100P-3	3 lb.	.10
100P-4	4 lb.	.12
100P-6	6 lb.	.15
150P-4	4 lb.	.15
150PH-8	8 lb.	.25
150PH-15	15 lb.	.25
156P-6	6 lb.	.20
200PD-15	15 lb.	.27
200PHN-35	35 lb.	.49
204P-112	112 lb.	.50

TERMINAL BOARDS

5 terminal	.59
8 terminal	.98
12 terminal	1.49

TYPE "J" POTENTIOMETERS

TYPE "J" $1.25 TYPE "JJ" $2.25

ohms	ohms	ohms	ohms	ohms
50*	2500*	100 K*	250-500*†	100 K-100 K*
65*†	3000*	100 K†	500-500*†	125 K-125 K*
200*	4000*†	125 K*	500-1500†	150 K-150 K*
300*	5000*	200 K*	1000-2000*†	250 K-250 K*
400*†	10 K*†	250 K*	2000-50 K*	350 K-25 K*†
500*	15 K*†	250 K†	2200-24 K*	350 K-350 K*
600*†	20 K*†	500k*	20 K-2000†	700 K-700 K*
750*	25 K*†	1meg*	25 K-10 K†	800 K-75 K*
1000*†	30 K*†	1meg†	35 K-5000†	1meg-1meg†
1500*†	50 K*†	2meg*	30 K-50 K*†	2meg-2meg*†
2000*†	80 K†	2meg†		5meg-5meg†

TYPE "JJ" $3.25

ohms	ohms
20K-20K-20K†	750K-750K-750K†
45K-27K-250*†	500K-500K-500K†
700K-700K-700K†	1meg-1meg-1meg†

* ¼" screwdriver slotted shaft.
† Knob type shaft.

TRANSMITTING MICAS

Type 9

Type 4

mfd	vdcw	type	ea.	mfd	vdcw	type	ea.
.00001	600	4	.18	.00162	600	4	.18
.00003	600	4	.18	.002	600	4	.20
.000365	600	4	.18	.002	1200	4	.48
.00065	2500	8	.31	.0022	2500	9	.78
.0009	600	4	.18	.0028	600	4	.23
.0001	2500	9	.31	.003	600	4	.25
.000152	600	4	.18	.0029	600	4	.25
.0002	600	4	.18	.005	600	4	.25
.00025	600	4	.18	.005	1200	9	.40
.0005	600	4	.18	.005	2500	9	1.18
.0051	2500	4	.43	.0062	600	4	.30
.0007	600	4	.18	.01	600	4	.40
.0008	600	4	.18	.01	600	9	.49
.0009	600	4	.18	.01	1200	9	.98
.001	600	4	.18	.0142	600	4	.45
.001	1200	4	.31	.02	600	4	.55
.001	1200	9	.31	.02	1250	9	1.36
.0013	600	4	.18	.027	600	4	.66
.0015	600	4	.18	.043	600	4	.99

(Many other types in stock)

"UHF" CONNECTORS

83-1AP 83-1SPN

Cat. No.	Army No.	Each	Per C
83-1AC		.42	.39
83-1AP	M-359	.28	.28
83-1D	PL-271	1.25	1.00
83-1F	PL-274	1.10	.90
83-1R	HO-239	.49	
83-1SPN	PL-259A	.49	.35
83-22R	SO-264	.50	.40

Connectors

S-304-CCT	.23
P-306-AB	.10
P-306-CCT-L	.33
S-306-FHT	.24
S-309-AB	.21
P-312-AB	.24
P-312-CCT-L	.42
P-315-FHT	.40
P-315-EB	.30
P-315-CCE	.40
S-315-AB	.36
S-318-AB	.43
P-324-FHT	.74
P-324-EB	.50
S-330-AB	.84
S-404-AB	.33
P-406-AB	.33
S-408-CCT	.55
S-408-CCT	.83
S-2408-SB	.53
P-2412-SB	.61
P-502-CE	1.10
S-502-DB	.57
P-506-CE	2.56
P-510-CE	3.04
S-510-SB	2.64
P-512-CE	3.52

BARRIER STRIPS

2-140-Y	.12
3-140-Y	.28
6-140-Y	.33
8-140	.34
10-140-Y	.53
10-140-3/4W	.53
10-240	.38
12-140	.48
4-141-W	.30
4-141-3/4W	.30
9-141	.26
11-141-Y	.48
11-141-Y	.76
12-141	.36
12-141-Y	.52
13-141	.62
13-141-Y	.89
15-141-Y	1.02
2-142-Y	.20
4-142-Y	.36
8-142	.46
10-142-3/4W	.85
11-142	.66
3-150	.53
4-150-Y	.85
4-151	1.30
5-151	1.60
4-152	1.89

Many other types in stock

MALLORY PUSH SWITCH

#2001	S.P. make cont., non-L	33¢
#2003	S.P.D.T., non-lock	35¢
#2003L	S.P.D.T., lock	35¢
#2004	D.P., make 2 non-L	49¢
#2004L	D.P., make 2 lock	46¢
#2006	D.P.D.T., non-lock	49¢

Open a/c to Rated Concerns. Prices net FOB our whse NYC and subject to change without notice.

SEND FOR BARGAINGRAM #583

ALEXANDER MOGULL CO., INC.

161 Washington St. N Y 6 N Y WOrth 4-0865

SURPLUS EQUIPMENT

INVERTER UNIT PE 218



Output: 115 VAC; Single phase; PF .90; 380/500 cycle; 1500 V.A. Input: 25-28 VDC; 92 amps; 8000 rpm; Exc. volts 27.5; Leland Electric mfg.

BRAND NEW **$29.95**

ONAN MOTOR GENERATOR SET MG 075-G-1

Generator 115 VAC; 480 cycle; 5.3 Amps; .6KW; PF 1.0; Also 25 VDC; 100 watt; 3.8 Amps; Driven by 115-230 VAC - 2hp motor; 60 cycle; single phase; 3450 rpm; 10.5 amps.

BRAND NEW

$195.00

BLACK LIGHT KITS

Ultra-Violet Fluorescence

Now . . . build your own black light lab equipment at a new low cost with these easy - to - assemble components. Kit contains: Ultra-Violet tube brackets, ballast, starter, wire, plug and wiring diagram.

4-Watt Kit—(5½" tube) **$3.00**
8-Watt Kit—(12" tube) **$4.00**

POWER RHEOSTATS

Standard Brands 5 ohms, 100 watt, 4.48 amps

BRAND NEW .. **$1.95 ea.**

Specially Priced ... **$20.00/dozen**

RESISTORS, Precision; Glass Covered, Hermetically Sealed

12 Megohms, 10 watt ..... **$2.50 ea.**

2000 Ohms, 35 watt; wire-wound; Grade 1, Class, Style D. Removed from new equipment **$1.00 ea.**

GEMFLEX PHENOLIC TAPE

Approximately 90 ft. roll; ¾" x .020"; Tests approx. 14,000 Volts.

75c per roll
$7.50 per doz.

CAMBRIC VARNISHED TAPE

¾" x 36 yards.....

$6.00 per doz.

Write For Your Requirements on Cannon Amphenol Plugs

ALL EQUIPMENT F.O.B. PASADENA • PLEASE SEND FULL AMT. WITH ORDER

C and H Sales Company

BOX 356-E EAST PASADENA STATION • PASADENA 8, CALIFORNIA

CAN'T KINK

8 cond. 5/16" dia. Tough rubber cov. cable. For remote or Ant. Control-Foot switch etc. Cut to your order Min. 50 ft..... **3½¢ ft.**
550 ft. Metal reels Express Collect.... **$15.00**

RCA 100A

Free Floating Cone Type-Magnetic-Load Speaker. Removed from rooms of a large N. Y. Hotel. Original cost $22.00..... **$1.95**
3 for $5.00

W.E. 24 & 12 volt Telephone lamp..... doz. **$1.50**
C/B 4 pole 35 ampere 115v. AC relay..... **$4.90**
3 ampere G.E. Mercury Switch ¼" glass tube..... 2 for **$2.50**

GRAIN OF WHEAT LAMPS

Used for illuminating meters, compass, dials, airplane instruments, etc. Soldering iron removes lamp from base to use in models, doll houses, miniature trains, Xmas trees, etc.
Mazda G.E. 323 Mazda G.E. 328
6V..19.A 6V..2A
Either type, doz. **$1.80**

MARKTIME 5 HOUR SWITCH

A 10 amp. timing device. Pointer moves back to zero after time elapses. Ideal for shutting off radios and TV sets when you go to bed. Limited supply at this special PRICE..... **$3.90**

Also available in 15 min.-30 min.-1 hr. at $5.90

ISOLATION TRANSFORMER $1.95

Nat. known Mfgrs. 50 watt 2 windings, 118 V. to 115 V. 60 cy. Ideal to prevent shocks from small radios and medical and electronic devices. Shipping Weight 5 lbs.

Other sizes and 230-115 in stock.

Kilowatt Demand Meter Totalizer containing heavy duty TELECHRON B-7, 1 RPM motor and hundreds of watch size gears, clutches, springs, etc. Shipping weight 2 lbs.
5 for $10.00 **$2.50**

RADAR MAGNETS ..... $5.00 to $17.50
DPDT 6 volt Battery D.C. 10 ampere Relay ..... 2 for **$1.95**
DPDT H&H Toggle Switches 10 for **$4.50**

NEW HOLTZER-CABOT TOTALLY ENCLOSED MOTORS



1/50 H.P. Reversible Single Phase Capacitor-Run type. 115 Volts AC 60 cycle 0.5 Amp. Torque 100 oz. inches. 4¾" shaft ¾" dia.

$17.50 each

GONIOMETERS CFT-47288 CFT-47372 in stock

We are Authorized Wholesalers for Micro Switch Corp. and carry the largest stock of Allen-Bradley Solenoids. Potter & Broomfield Relays. Guardian Electric Co. Solenoids and Relays and Hayden Clock Motors in all speeds. Electric Counters.

EST. 1923 **BLAN** EST. 1923

Experimenters and Inventors Supplies

64 Dey St., New York 7, N. Y.

RADAR

SCR 545A Search and Track. Complete trailer, power supply and spare parts. Nearly new. Write for description and price.

PORTABLE PUMP ASSEMBLY

Leland, 110 v. 60 c. 1 ph., 1/3 H.P. motor and D. Roper #3 hydraulic pump. 300 lbs PSI max., 125 lbs. PSI continuous @ 3.25 gallons per min..... **$52.00**

SEARCH LIGHT

Signaling, 12" Curtis Lighting, Inc. 115 v. a-c or d-c, 1000 watt. Complete w/bulb. Comes w/mounting assembly that gives 360° horizontal rotation and 180° vertical rotation..... **$27.50**

AUTO-DRYAIRE

Model 220. 115 v. 60 cy. for pressurizing high altitude electronic equipment **$160.00**

MOTORS

General Electric geared 27 v. d-c @ 0.7 a., 115 RPM, 1 oz/ft torque.. **$3.50**
Electric 1/15 H.P., 115 v. 60 cy. 1 ph. 1800 RPM **$4.75**

GENERATOR

Bendix model NEA3. Output 115 v. a-c 10.4 amps, 800 cy. SP, and 28.5 v. d-c, 60 amps @ 2400 RPM. Self excited, splined drive. New. Orig. packing.. **$27.50**

RECTIFIER

Dry Disc, 6.5 v. a-c FWCT, 2.3 v. d-c @ 3 amps.....75¢
4 for **$2.00**

Westinghouse Transformer 18,400-0-18,400 v. @ 9 KVA continuous. Westinghouse Filament Transformer, 11.5 v. @ 40 amps. Both transformers have 115 v. 60 cy. 1 ph. primaries. Westinghouse Choke, 50 h. @ 575 ma., insulated for 17,500 v. continuous. (2) WL-531 rectifier tubes, 50,000v. peak inverse. Complete **$160.00**

NEW!

- low prices
- values
- equipment
- components

Note: All merchandise not designated as new is guaranteed to be in excellent to new condition.

EPCO

1527 E. 7th St.
Los Angeles 21, Calif.

POWER SUPPLY COMPONENTS

TRANSFORMERS

Plate, American Transformer Co. Spec. 29108. Pri. 115 v. 60 cy. 10.4 KVA. Sec. 17,000 v., 530 amps., 35 KVA test..**$45.00**
Plate, American Transformer Co. Spec. 29106. Same as above but center-tapped to handle 1 amp @ 8000 v..... **$75.00**
Filament, American Transformer Co. Spec. 29106, Type WS, .050 KVA, 50/60 cy. SP., 35 KVA test, 12 KV d-c operating. Pri. 115 v., Sec. 5 v., 10 amps. w/integral stand-off insulator and socket for #371, 872, etc. rectifier tubes..... **$12.50**
2 for $22.50—4 for **$40.00**

Line, General Electric, Cat. #60G607, 230/460, 115/230 v. indoor 60 cy. SP., 37.5 KVA. Approx. wt. 900 lbs...**$210.00**

CAPACITORS

9.12 mfd., 1265 v. 60 c. a-c or 4000 v. d-c power factor correction 5.0 KV. A.R. Cat. #2528908, ... **$17.50**
.25-.25, 6000 v. d-c or .125 @ 12,000 v. d-c., Fast Cat. #A7548, oil..... **$3.75**
1.25/1.25 mfd., 7500 v. Cat. #28F380 ..... **$12.50**

1.0 mfd., 25,000 v. d-c., Cat. #14F59 ..... **$36.00**

2x.15 mfd., @ 8000 v. or .075 mfd. @ 16,000 v. Vitamin Q..... **$2.50**

RESISTORS

Fixed, w.w. 180,000 ohm, 200 w. ferrule ends **$1.00**
Fixed, w.w. 5,000 ohm, 200 w. ferrule ends **$1.00**

METERS

Volt Meter, 2" Weston Model 301, 1 ma f.s. calibrated 0-20 KV d-c w/Weston 20 meg. precision meter multiplier, stand-off insulators and clips..... **$18.00**
Meter only, less multiplier..... **$ 4.95**
Ammeter, a-c 2" Westinghouse NA-35 or Weston Model 476, 3 amps, f.s. deflection; scale calibrated 0-120, includes doughnut type current transformer w/200-5 ratio at 25-125 cy. **$8.50**
Volt Meter 2" Weston Model 301, 7 KV d-c. 1 ma. f.s. calibrated 0-4 KV w/4 meg. Weston precision multipliers...**$7.50**

RELAY

Magnetic overload, Allen-Bradley #810, 6.3-18.1 amps. 600 v. max..... **$7.95**

CONTACTOR

Allen-Bradley & Westinghouse, 115 v. 60 cy. coil, DPST, 15 amps. **$4.95**

HIGH VOLTAGE RECTIFIER POWER SUPPLY

Variable output 0-15,000 v. d-c @ 500 mils. Input 115 v. 60 cy. SP. Army type RA-38. Size 63¾" x 53¾" x 54¾". Wt. 2040 lbs. Units are new, complete with spare tubes and remote control. Write for detailed information.

RECEIVER-TRANSMITTER COMBINATIONS

SCR-608/628 FM at 35 Watts output: 20.0-27.9 Mcs., complete with receiver and transmitter, dynamotors, control boxes, crystals, antennas.
SCR-608/628 as above, except for frequency of 27.0-38.9 Mcs.
TCS Mfged by Collins 40/20 W. Phone & CW for 12 V. DC. 1.5 to 12.0 Mcs. with all accessories.
AVT/R/A Mfged by RCA. 6-10 Watts phone and CW 2300 to 6700 Kcs. Small compact for 6 & 12 V.D.C. NEW & COMPLETE with power supply, mike, key & antenna.

RADIOTELEPHONES

5 WATT, Model JT-52 by Jefferson-Travis, 3 channel, crystal controlled recvr-transmitter, built-in speaker, hand microphone, 6 Volt DC power supply. Freq: 3000-3000 KCS, in compact steel cabinet, complete less xtals. New in original cartons. In dealer quantities.

WALKIE-TALKIES HANDY TALKIES
PORTABLE RADAR LORAN
MOBILE EQUIPMENT

COMMUNICATION DEVICES CO.

2331 Twelfth Ave. N. Y. 27, N. Y.
Cable: COMMUNIDEV Tel: AD-4-6174, 5

RADAR EQUIPMENT

Search Radars

APS-2; APS-3; APS-4; APS-15;
SCR-717B; SCR-720; APQ-13;
APR-1 Receiver & Tuning Units
APR-4 Receiver & Tuning Units
APR-5 Receivers
TPX-1 IFF Transmitters—Receivers
R-69/APN-9 Loran Receivers
CPN-6 3cm Radar Beacon
AN/APG-13 Complete New
SO-9 10cm Search Radar

TEST EQUIPMENT

TS-3/AP; TS-13A/P; TS-14/AP
TS-15/AP; TS-16/APN
TS-19/APQ; TS-23/APN;
TS-24/APR-Z
TS-26/TSM; TS-27/TSM; TS-33/AP
TS-35/AP; TS-36/AP; TS-45
TS-47/APR; TS-59
TS-61/AP; TS-62/AP; TS-74/VPM
TS-76/APM-3; TS-91; TS-98
TS-100/AP; TS-102; TS-111/CP
TS-118/AP; TS-125/AP; TS-126/AP
TS-127/V; TS-131/AP;
TS-159/TPX-1
TS-146; TS-155/VP; TS-218/AP
TS-203A/P; TS-206/AP; TS-226/AP
TS-268/VB; BC-376H
BC-905; BC-906; BC-978
BC-1277; BC-1236A; APA-11
LS-1 Frequency Meter
LM-15 Frequency Meter
804 Measurement Corpor.
Signal Generator
Test Equipment and Signal Generators for 10 and 3 cm
1-208 FM Signal Generator
All types of Magnetrons

Write for listing

LERU LABORATORIES, INC.
360 BLEECKER ST.
NEW YORK 14, N. Y.
Oregon 5-3525

ACORN

Attention: SCHOOLS—LABS—INDUSTRIALS—
Same Day Service!

BATTERY CHARGER $5.95

Pri. 115v. AC delivers 6v. DC @ 3 amps. Can be used as trickle charger for auto batteries. Portable strobe units and a 6v. DC supply

BC-375E AIRCRAFT TRANSMITTER

Designed to operate from 200 KC to 12 meg. (less BC band). Complete with dynamotor. Brand New... $59.50

Tuning Units for Above:
TU 6B, 7B, 8B, 9B, 10B, 30B .....ea. $2.95

5" OSCILLOSCOPE

High Gain—Wide Band
Made by Famous Manufacturer
A Complete Instrument—Not a Kit



Features:
1: Vertical Bandwidth 10 Cy to 2 Mc., 3 db down
2: Vertical Sensitivity .06 RMS volts/inch
3: Decade Type Frequency Compensated Attenuators
4: Horizontal Bandwidth 2 Cy to 900 KC 6 bd down
5: Horizontal Sensitivity .15 RMS volts/inch
6: Push Pull Deflection Amplifiers
7: Direct Connection to Deflection Plates Available
8: Internal Synchronization of Either Polarity
9: Axis Input (Intensity Modulation)
#10: Calibrated 60 Cy Test Signal
Tube Complement:
2-6AG7, 3-6SN7, 1-6AC7, 1-5Y3, 1-2X2, 1-884, 1-5CP1
BRAND NEW—QUANTITY LIMITED. OUR VERY LOW PRICE $129.50

HANSEN SYNCHRONOUS MOTOR
115v. 60 cy. Model 600, 1 RPM .....ea. $2.95

T17B SHURE CARBON MIKE
Shopworn condition; tested—perfect .....ea. $1.39

RAYTHEON PULSE TRANSFORMER
UX 7350 .....ea. $2.95

FLYBACK TRANSFORMERS—RCA Type

R211 T-1 for 10" CR tubes ea. $1.98
211 T-5 for 10" —19" CR tubes, 13½-14 KV voltage doubler .....ea. 3.98
211 T-2 for projection TV 27 KV uses 3 1B3s and 2 6BG6s for 5TP4.....ea. 6.95

FOCUS COIL

470 ohms for 10" or 19" CR tubes. Ea. $2.49

WHEELOCK RELAY
Mfg. by Signal. Type BI Q-34. Model BI-X44. 110 v. 60 cy. adjustable tension DPST .5 amp contacts. Ea. $2.95

ALLIED LATCHING RELAY
Type AHLX-1. DPDT-115 v. 60 cy. AC. .....Ea. $1.95

LEACH RELAY

Type 1054-BN. DPST 12 v. DC, coil 67 ohms. Heavy duty, contacts Ea. $2.49

ALLIED RELAY
Type BJ. DPDT 26v. DC.....Ea. $1.69

ALLIED PLATE RELAY
Type FX10. 7000 ohm coil SPST. Ea. $1.29

PRICE ELECTRIC RELAY
Type 133. Extra heavy duty. 110 v. 60 cy. DPST .....Ea. $3.95

ISOLATION TRANSFORMER
Pri. 115 v. 60 cy. Sec. #1: 125 v. @ 90 mils; #2: 135 v. @ 90 mils; #3: 6.3 v. @ 1.5 amps. Upright mt. .....Ea. $1.95

ISOLATION TRANSFORMER
Pri. 115 v. 60 cy. Sec. #1: 120 v. @ 250 mils; #2: 6.3 v. @ 9.3 amps; #3: 6.3 v. @ 1.2 amps. Half shell mt. .....Ea. $2.95

LOW VOLTAGE TRANSFORMER



Pri. 115 v. 50-60 cy. Sec. 15 v. 12 amps. 180 v.a. Open frame mt...Ea. $3.95

UTC LOW VOLTAGE TRANSFORMER
Pri. 115 v. 60 cy. Sec. 13 v. @ 8 amps. Upright mt. .....Ea. $3.49

UTC LOW VOLTAGE TRANSFORMER
Pri. 115 v. 60 cy. Sec. 10 v. @ 5 amps. Channel mt. .....Ea. $2.79

6V6 OUTPUT TRANSFORMER

Hermetically sealed. 5000 ohms plate impedance. 250 ohms primary D. C. resistance. Single 6V6 to 4, 8 and 16 ohm voice coil. 6 w. output. .....Ea. 69¢

STANCOR OUTPUT TRANSFORMER

6L6 PP. 6000 ohm primary to universal v. c. 4, 8, 15, 250 and 500 ohms .....Ea. $2.69

POWER TRANSFORMER
Utah Y 240 Pri. 115 v. 60 cy. Sec. #1: 600 v. c.t. @ 40 mils; #2: 5 v. @ 2 amps; #3: 2.5 v. @ 4.5 amps. Upright mt. Ea. $1.49

RCA High Fidelity OUTPUT TRANSFORMER
PP 6L6s. 25 w. Frequency range 50—15000 CPS. 15 ohm v. c. .....Ea. $4.95

ERIE CERAMIC TRIMMERS

Type 554: 5-25 MMFD
5-50 MMFD 15¢ ea.
$12.50 per C

Phone WOrth 4-3270

ACORN ELECTRONICS CORP.
76 Vesey St. Dept. E-1 N. Y. 7, N. Y.

Terms: 30% cash with order, balance C.O.D. If rated, terms 2% net 10 days. All prices F.O.B. our warehouse in N.Y.C. Minimum order $5. NOTE: Due to conditions beyond our control, prices are subject to change.

"TAB"
That's a Buy!

Precision Resistors—
Over 2½ Million in Stock

No	Mfrs. Choice—Wo	Ship Types in Stock			
0.116	209 4	700	1919	6140	23400 147000
0.42	216	711	1922	6200	23500 150000
0.428	220	725	1924	6300	24000 155000
0.487	220.4	750	1926	6495	24500 160000
0.7	225	750	1940	6500	25000 165000
1.03	230	800	1950	6840	25200 166750
1.3	235	800	2000	7000	25800 167000
1.75	240	850	2045	7000	25833 169200
2.5	248	854	2050	7320	26000 175000
3	245.4	899	2095	7500	26500 180000
3.83	260	900	2141	7750	26750 180000
4.35	260	910	2142	7717	27000 185000
5	271	917	2145	7900	27500 186000
5.025	275	946	2150	7950	28000 190000
6.25	280	975	2160	7950	28430 190000
6.5	284 1000		2180	8000	28500 200000
7	289 1030		2187	8064	29000 210000
7.5	299 1056		2195	8250	29500 220000
7.9	300 1059		2200	8500	29990 210000
8	310 1062		2250	8700	30000 215000
10.35	311.5 1090		2300	8750	31000 220000
11.25	320 1110		2400	9000	31500 225000
12	325 1150		2450	9100	32000 229000
13.52	330 1160		2465	9400	33000 230000
14.2	340 1162		2485	9500	35000 235500
14.25	350 1200		2490	9710	37000 238000
14.5	360 1225		2500	9800	38160 240000
15	366.6 1250		2525	9900	38500 245000
16	370 1260		2600	9982	39000 250000
17	375 1300		2625	10000	39500 265000
18	380 1350		2635	10430	40000 265000
19.2	389 1355		2700	10500	42000 270000
20	390 1400		2750	10600	43000 275000
22	400 1450		2800	10800	45000 290000
23	410 1495		2860	10936	47000 300000
24	414.3 1500		2870	11000	47500 307500
25	418.5 1515		3000	11400	48000 311000
26	425 1518		3000	11500	48660 314000
28	426.9 1600		3100	11690	49000 316000
30	427 1640		3150	12000	50000 325000
31.5	440 1646		3259	12500	52000 330000
32	450 1650		3290	12600	55000 330000
48	452 1670		3333	13000	56000 333500
49	460 1688		3354	13190	57865 350000
50	470 1710		3500	13500	58333 353500
51.78	475 1712		3549	13550	60000 375000
55	478 1740		3700	13600	61434 380000
56.7	480 1770		3730	14000	62000 400000
60	487 1800		3760	14250	64000 402000
62	500 1818		4000	14400	65000 420000
68	520 1830		4030	14500	66660 422000
74	525 1865		4200	14550	66650 425000
75	540 1892		4220	14600	67500 450000
80	550 1894		4250	15000	68000 455000
81.4	575 1895		4300	16000	70000 478000
88	580 1896		4316	16500	72000 500000
89.8	585 1897		4440	16800	73585 520000
95	600 1898		4444	17000	75000 521000
100	612 1899		4500	17500	80000 525000
101	625 1900		4620	17777	82500 545000
105	635 1901		4750	18000	84000 550000
105.7	640 1902		4850	18300	85000 570000
107	641 1903		4885	18350	85750 575000
120	645 1904		4900	18500	88000 600000
121.2	649 1905		5000	18800	90000 620000
125	650 1906		5100	19000	91000 650000
130	657 1907		5210	19500	93500 650000
135	665 1908		5235	20000	95000 660000
147.5	668 1909		5270	20441	100000 690000
150	670 1910		5360	20500	103000 700000
160	673 1911		5500	21000	115000 750000
165	675 1912		5600	21500	116667 761300
170	680 1913		5730	22000	120000 800000
175	681 1916		5775	22500	130000 815000
179	684 1915		5910	22990	135000 850000
182	689 1916		6000	23000	140000 900000
182.6	697 1917		6100	23150	144000 930000
200	699 1918		6125	23325	145000 950000

Any Size Above, Each 35c; Ten for $3.29

Megs-1.	1.8	2.11	3	4.25	7
1.1	1.57	2.2	3.3	4.5	7.5
1.2	1.579	2.25	3.5	5	7.62
1.28	1.65	2.5	3.673	5.5	7.74
1.3	1.75	2.7	3.75	6	8
1.38	1.8	2.78	3.9	6.5	8.02
1.39	1.9	2.8	4	6.6	8.5
1.4	2	2.855	4.23	6.7	9.05

Any Size Above , Each 70c; Ten for $6.49

IN STOCK . . .

9,000 Antennas	2,500 Headsets
4,000 Batteries	2,300 Line Filters
300,000 Capacitors	27,000 Pilot Lights
20,000 Chokes & Coils	2,000 Selsyns
15,000 Circuit Breakers	1,000 Blowers
1,000 Clock Motors	1,100 Tach Generators
40,000 Connectors	2,500 Rectifiers
12,000 Piezo Xtals	20,000 Relays
1,200 Dynamotors	250,000 MM Resistors
15,000 Ft. Fuse	2,500,000 Precision Resistors
1,250,000 Fuses & Holders	65,000 Potentiometers
10,000 Ft. Spaghetti	21,300 Rheostats
45,000 Insulators	6,000 Tech Manuals
5,500 Meters	50,000 Tube Sockets
25,000 Rotary Switches	500,000 pcs Telephone Equip (jacks, plugs, lamps, etc.)
20,000 Toggle Switches	
15,000 Microswitches	
100,000 Ft. Wire & Cable	40,000 Transformers
5,000,000 pcs Hardware, Lugs	250,000 Tubes
	Millions of Odds N Ends

Government Contractors, Quantity Users—Write for Your Needs On Your Company Letterhead

"TAB" That's a Buy!
Dept. 1E, 6 Church St.
Corner Church & Liberty Sts.
New York 6, N. Y.
WOrth 2-7230

ALL MERCHANDISE GUARANTEED

PHONE and CW TRANSMITTERS

from 25 watts to 1 kilowatt including many navy and ground units:

TBL	TCS	ET4332
TBK	TAJ	BC447
TBM	TAQ	ET8010
TDE		ET8023

RADAR and SONAR MARINE and AIRBORNE

SA	SJ	YJ	APS 2, 3 and 4
SO	SF	YG	ASB
SN	SL	SD	CPN-6
SQ	SK	etc.	CPN-8

QCO, QBE-WEA, NAA, etc.

TELEPHONE SWITCHBOARDS BD-71 and BD-72

Also: Dynamotors, Converters, Invertors; Magnetrons; Klystrons, Special Purpose Tubes; ½-million insulators, all types; Microwave and test equipment.

COMPASS
COMMUNICATIONS CO.
393 Greenwich Street, N. Y. C.
Phone: BEekman 3-6510
Cable Address: COMPRADIO, N. Y.

A MULTI-PURPOSE RADAR SEARCH RECEIVER ARD-2

Will measure RF signals from 80 to 3000 MCS and pulse rates from 50 to 8000 cycles. It can also locate transmitted signal sources by visual and aural indicators.

EQUIPMENT: Consists of thhe following: 1 ANTENNA-DETECTOR (CMD-66AFH) has variable length antennas (2), diode detector and silver plated tuning stub with calibrated scale; 1 AMPLIFIER (CMD-50ADC) has three stage pulse amplifier, a trigger circuit, a pulse rate counter circuit and audio amplifier, a visual signal indicator and a rectifier power supply which is operative on 115 Volts AC, single phase, at 60 to 2400 cycle current, regulated; 1 TEST OSCILLATOR (CMD-50ABG) has cavity frequency of 400 cycles with selection of four pulse repetition rates. With the above are included all cables with fittings, accessories, and shock mounted rack, and 2 technical manuals.

BRAND NEW! COMPLETE!
Price, each.....$175.00

WALKIE-TALKIES HANDY TALKIES
PORTABLE RADAR LORAN
MOBILE EQUIPMENT

COMMUNICATION DEVICES CO.
2331 Twelfth Ave. N. Y. 27, N. Y.
Cable: COMMUNIDEV Tel: AD-4-6174, 5

"AN" "K"

"AN"	"K"
3108	WK
3106	GK
3102	SK
3100	NK

Connectors
FOR IMMEDIATE DELIVERY

What Types Do You REQUIRE?

WRITE—WIRE—PHONE

WILGREEN
74 Cortlandt St. N. Y. 7, N. Y.
BA-7-4862

GLASS BLOWING IN ALL ITS BRANCHES

Special tubes, Lamps, Vacuum, Rare Gases etc. Developed or made to Specification. Kovar, Tungsten, Copper seals. Vacuum Pumps, Glass or Metal.

IN STOCK AT VERY LOW PRICES

Tungsten, Molly, Tantalum, Kovar, etc. in Wire, Ribbon, Strips, Mesh, Tubes, etc., also other materials and equipment used in the Vacuum, Radio Tubes, Lamps, in Industry and Laboratories.

F. ALEXANDER
115 W. 23d St. New York 11, N. Y.

FM Carrier Current Communication Equipment

BRAND NEW G.E. STOCK
FREQ. RANGE 70 KC TO 200 KC
MOBILE and FIXED STATION UNITS

Mobile Receivers 5.7-volt input.....$50.00 ea.
Mobile Transmitters 5.7-volt input power output 25 watts.....$100.00 ea.
Fixed Sta. Receivers 110V/60/1 ...$125.00 ea.
Fixed Sta. Transmitters 110V 50 Watts Out $175.00 ea.
Fixed Sta. Console Controls with 5" Speaker (can be used for any type installation) $20.00 ea.
W. E. F-3 Handsets W/Retrax Cord. $8.00 ea.
Eicor Dynamotors 5.7-v at 22 amp input—450v @ .150 amp output.....$15.00
Eicor Dynamotors 5.7-v at 25 amp input—600-v @ .150 amp output.....$18.00
Antenna base w/coupler $20.00
Control Heads $12.00

Above Material All Brand New. Delivery from Stock. Subject to Prior Sale.
Subject to Prior Sale

AIRCRAFT RADIO INDUSTRIES, INC.
274 Madison Ave., New York City
780 State St., New Haven, Conn.

Have available for quick sale:
Compound (Pitch) Melting Tank
25 gal. capacity, electric operated
Glassine Paper: .001, .015, .002 & .0007 thickness. In rolls, 2500 lbs. total.
Electronic Transformer Co., Inc.
207 West 25th St. New York 1, New York

BRAND NEW STANDARD BRAND TUBES

OA3/VR75	$1.39	2J48	$24.50	6C24	$27.50	231A	$14.95	803	$2.95	865	$ .75	1616	$ .95	8025A	$5.95
OC3/VR105	.99	2K25	24.95	6D4	1.75	353A	6.95	804	9.95	865	1.39	1619	2.49	9003	1.75
OD3/VR150	.85	2X2	.50	6F4	1.75	371B	.95	805	3.49	866A	1.15	1622	2.79	9004	.49
1B22	3.95	2X2A	1.45	6J4	5.25	417A	8.95	807	1.49	872A	1.25	1624	1.25	9005	1.98
1B23	3.95	2Y3G	.99	10	.75	450TH	39.50	810	16.95	874	.99	1625	.45	9006	.35
1B24	6.95	3A4	.55	10Y	.75	450TL	44.50	811	2.75	878	.99	1626	.45	C6J	6.45
1B26	2.75	3A8	1.15	24G	2.39	530	12.50	812	2.95	879	1.45	1629	.38	CRP72	1.98
1B27	19.95	3B7	.38	100TH	8.95	531	3.59	813	7.95	931A	6.50	1636	3.25	E1148	.75
1B29	4.75	3D6	.25	152TH	19.95	599	3.95	814	3.95	954	.35	1641	1.95	FG104	19.95
1B36	23.75	3B31	3.25	205B	9.95	631P1	4.95	815	2.25	955	.45	1642	.98	HY65	2.50
1B40	47.50	3CP1/8S1	2.25	211	.75	703A	2.95	836B	3.95	956	.49	1645	1.25	HY114B	.79
1D8	1.25	3L24	2.39	215A	.29	705A	2.95	832B	8.95	957	.35	1851	1.49	HY615	.45
1L4	.79	3C28	4.95	217C	18.00	715B	8.95	836	1.95	958A	.49	7193	.35	RK25	3.95
2C25	.75	3D21A	1.98	250R	18.95	715C	24.50	837	1.95	989	.49	8011	1.75	RK60	1.98
2C26	.39	3D23	4.95	254TH	19.95	721A	2.25	838	2.95	991	.49	8013A	6.49	RK61	19.98
2C34	.39	4A1	1.75	255A	8.95	723A/B	12.95	843	.75	1291	.28	8014A	24.95	7CA	.29
2C40	5.49	4AP10	4.95	286A	14.95	724B	3.95	845W	5.95	1299	.25	8016	2.50	7E5	.39
2C44	1.49	4B28	4.55	304TH	18.95	725A	6.45	851	49.50	1608	4.95	8020	1.50	7E6	.49
2J22	8.95	4E27/257B	17.50	310A	7.95	801A	.50	860	5.95	1649	4.95	8021	2.95		
2J26	6.95	5D21	24.50	316A	1.95	802	3.95	861	24.50	1613	.99				
2J39	24.95	6AJ5	2.25	329A	8.95										

MARITIME INTERNATIONAL COMPANY

11 State Street, New York 4, N. Y. **Cable Address "Foxcroft"** **Phones: Digby 4-3192-3**

WAR EQUIPMENT MAIL SALE!

SAVE up to 70% on Electronic, Radio, Mechanical Equipment!

For home experimenters, laboratories, schools, etc. New fully guaranteed. Fraction of original cost. 100s of items including:

- 2500-w, 60-c, 110-v Plants..... $289.20
- 1300-w, 400-c 110-v (A-C Plant).. 129.60
- 1000-w, 800-c, 115-v generator... 18.96
- General Electric Wall Heater, 3000 watt, 110-220-volt 26.80
- General Electric Selsyns (pair).... 3.39
- Raytheon 110-v Electric Timer.... 8.94
- Meg-A-Lite Continuity Tester.... 1.99
- Resistor, Capacitor Asst. 4 lb..... 1.89
- City Desk Telephones..... 5.98
- Photo Cell Light Control Kit..... 4.87
- Other bargains—Compressors, Paint Spray Guns, Engines, Pumps, Tools, etc.

18 yrs. in business in Lincoln. Satisfaction Guar. We prepay all shipments.

Card brings catalog, 1000s bargains.

FREE SHIPPING BARGAINS

BURDEN SALES COMPANY

842 "O" St. Lincoln, Nebr.

LARGE QUANTITIES of *RADIO TUBES*

TYPE	TYPE	TYPE	TYPE	TYPE	TYPE	TYPE
5U4G	6AG5	6D6	6K6GT	6SH7	42	813
5V4G	6AL5	6H6	6K7GT	6SN7GT	803	866A
6AB7	6C4	6J7	6N7GT	12SG7	805	1622
6AC7	6C5GT	6J5GT	6SG7	12SK7	807	9005

Packed in Original Cartons. Prices on request.

SUBSTANTIAL DISCOUNTS ON LARGE ORDERS

All tubes are brand new standard brands. This offer subject to change without notice and prior sale. Terms: 25% deposit with order balance C.O.D. $25.00 dollars minimum order.

MANUFACTURERS:
WANT MORE EXPORT SALES? CONTACT: MICHEL LEVIT

METROPOLITAN OVERSEAS SUPPLY CORPORATION

Manufacturers and Distributors of Electronic Products

1133 BROADWAY Phone Chelsea 3-1105 **NEW YORK 10, N. Y.**

COMMUNICATION TRANSMITTERS

2000 to 20,000 KCS
350 Watts C.W.
250 Watts Radiotelephone

Model MI-8167 Manufactured by R.C.A.

The MI-8167 was made for US Army point-to-point ground communications use. Extremely compact (size: 60 in. High, 17 in. Wide, 27 in. Deep), and shock mounted. High speed keying and High Level Class "B" modulation incorporated. Input 190 to 250 Volts AC 50/60 cycles. No external coils needed—built in band switching and antenna tuning included. Complete with tubes, built-in shielded oscillator unit (choice of crystal or M.O. units), with or without Speech Amplifier. Fully metered with instantaneous switching. Net weight 670 pounds. Quantities available.

BRAND NEW! ORIGINAL PACKING! COMPLETE!

RADIO BROADCAST TRANSMITTERS

PORTABLE—"TWT PB-50A"

Here is a complete portable broadcasting station made for the US Army. Operates from either 110 or 220 V. AC 50/60 cycle source. Has exceptionally high fidelity, extreme compactness and incorporates modern circuit design. Power output is 50 Watts in frequency range of 1100 to 1500 Kcs, crystal or MO controlled. 100% modulation. Complete.

All the above in five trunks for portability. Now.

WALKIE-TALKIES HANDY TALKIES
PORTABLE RADAR LORAN
MOBILE EQUIPMENT

COMMUNICATION DEVICES CO.

2331 Twelfth Ave. N. Y. 27, N. Y.

Cable: COMMUNIDEV Tel: AD-4-8174, 5



The
"KELLOGG DEHYDRATOR"

An all purpose self-reactivating dehydrating unit. To be used for removing moisture from gases. Numerous applications in the fields of Physics, Electronics and Chemistry. Dual insulated tanks with thermostatically controlled heating elements. Complete with 20 lbs. of Silica gel., heating elements, shut-off and safety valves.

$62.50
F.O.B., N. Y.

INTERSTATE Appliance Co., Inc.

Dept. KD, 600 Broadway, NEW YORK 12, N. Y.

TENNEY
High Altitude Chamber

Temperature Control 70° F to 125° F.
Humidity control up to 95%.
Altitude control sea level to 53,000 ft.
Used little, like new

KINGS COUNTY MACHINERY EXCHANGE
488 Atlantic Avenue, Brooklyn 17, N. Y., Dept. "E"

SURPLUS COMPONENTS FOR SALE

Bathtubs, oils, micas, xformers, chokes, relays, trimmers, sockets, odd items, etc.

Surplus lots purchased.

EMPIRE ELECTRONICS
Box 41, Midwood Stat., Brooklyn 30, N. Y.
Phone BRyant 9-1229

WE PAY $ $ $
TOP DOLLAR for Your SURPLUS TUBES
Receiving • Transmitting • Industrial
NEW or REMOVED FROM EQUIPMENT
Make Your BIG PROFIT Now when Prices are Highest! Immediate Payment!

We Buy, Trade and Sell Tubes & Surplus Equipment.
Send Us Your Lists and Prices.

WANTED IMMEDIATELY . . .

1B3/860	5C22	6J6	9D22	24A	810, 811
2E29	6C21	12AU7	250TH/R	450TH/R	1614
4C35	6J6	12BH7	304TH/R	826/27	9001/5/13

"TAB" That's A Buy!

Dept. E, 6 Church St
New York 6, N. Y.
WOrth 2-7230

TAB — THAT'S A BUY

TUBES

TESTED—GUARANTEED

Prices Subject to Change

*Critical Type—Write for Price

OA2	1.69	2A3	1.29	5C22	59.95	6F6GT*	.85	7C23	72.00	RK18	.90
OA3/VR75	1.28	2A4G	1.20	5C39/C3B	9.95	6F7	1.39	7E8/1201		19	.90
OA4G	1.33	2A5	.89	5D21	24.30	6F8G*	1.49	7E8	1.10	19	.69
OB2	1.58	2A6	.89	5J28	13.45	6G6G	.90	7E7	1.10	19BG6G*	6.00
OB3/VR90	1.39	2A7	.89	5J30	13.45	6H6GT	1.15	7F7	1.45	19J6*	3.20
OC3/VR105	1.58	2B4	2.98	5J32	99.00	6C4	4.68	7F8*	1.45	19T8*	2.90
OD3/VR150	.85	2B7	.98	5R4GY	1.50	6J4*	6.95	7G7/1232	1.33	20	1.17
OY4	2.53	2B22/		5T4*	1.72	6JGT*	1.50	7H7*	2.00	RK20A	1.50
OZ4G	.86	GL859	1.38	5U4G*	1.45	6J6*	1.75	7J7	1.33	RX21	2.50
C1A	4.90	2C21/1642	.36	5V4G*	2.40	6J7*	1.50	7K7	1.33	FJ22/CE1C	1.49
O1A	.48	2C22/7193	.89	5W4	.83	6J8G	1.39	7L7	1.33	22	.79
1A3	1.05	2C24	1.98	5X4G	.98	6K6GT	1.16	7N7*	1.33	24	.89
1A4P	.98	2C34/RK34	.30	5Y3GT*	1.25	6K6GT*	1.45	7Q7*	.95	24A	1.10
1A5GT	.88	2C39	28.98	5Y4G	.75	6K7	.75	7R7*	1.15	24G	1.49
1A6	1.05	2C40	8.90	6A3	1.98	6K8	1.49	7S7	1.45	24GT	1.49
1A7GT	1.06	2C43	28.50	6A4	1.18	6L6G	.95	7T7	1.03	25W4GT*	2.00
1A24	1.89	2C45/464A	16.95	6A6	7.48	6L6*	2.26	7V7	1.33	25Y5	1.45
1B3/8016*	2.48	2C46	1.20	6A8	1.05	6L6G*	1.25	7W7*	2.60	27	.79
1B4P	.98	2C51	3.69	6A8G	1.50	6L6GA*	1.90	7X7/		27	.75
1B5/25S	.98	2C51	3.69	6A6	1.33	6L7	.98	XXFM	1.33	28	.79
1B7GT	.98	2C52	3.06	6A7	1.05	6N4	2.39	7Y4*	.90	27	.75
1B21/471A	2.85	2D21	1.19	6AB4GT	1.00	6N7GT	1.00	8A7	1.33	FG27A	8.70
1B22	3.49	2E5	1.16	6AB4*	2.00	6N7GT	1.26	10Y	.29	RK28A	3.85
1B23	6.25	2E22	1.12	6AB5/6N5	1.33	6P5GT*	1.26	12A	.39	28D7	.39
1B24	4.50	2E24	2.98	6AB7/1853	1.20	6Q7	1.39	12A5	.89	30*	.89
1B26	3.69	2E25/HY65	4.20	6AC8GT	1.29	6R7	.98	12A6*	.98	HY31Z	2.75
1B27	23.85	2E26	3.35	6AC7*	2.90	6R8	1.39	12A7	1.49	31	.59
1B29	.98	2E30	2.25	6AC7W*	3.54	6S4*	1.89	12AH7GT	1.33	32L7GT	1.49
1B32/532A	1.71	2E36	10.49	6AD7	1.00	6S7	1.29	12AH7GT	1.33	FG32	5.98
1B34	10.60	2J21A	10.69	6AE8	.99	6S8GT*	2.65	12AL5*	2.00	32L7GT	1.49
1B37	18.00	2J22	9.45	6AE6G	.79	6SA7GT*	2.00	12AT6*	1.50	FG33	8.90
1B38	34.50	2J26	6.90	6AF4GT	.89	6SB7Y*	1.25	12AT7*	1.33	34	.79
1B40	4.95	2J27	13.90	6AF6G	1.33	6SC7	1.39	12AU6*	2.00	34	.90
1B41	49.95	2J30	39.50	6AG5*	2.65	6SD7GT	1.29	12AU7*	1.00	35/51	1.00
1B42	7.50	2J31	8.90	6AG7*	2.85	6SF5	.98	12AV6*	1.00	35A5	1.00
1B46	3.69	2J32	12.80	6AH6G	1.49	6SF7	.98	12AV7*	1.20	35B5*	1.00
1B53	49.95	2J33	18.45	6AH6*	3.90	6SG7*	2.00	12AW6*	2.65	35C5*	1.00
1B54	79.95	2J34	19.50	6AJ5	1.49	6SH7GT*	2.00	12AX7*	1.00	35L6GT*	1.00
1B56	49.95	2J38	9.95	6AK5*	3.90	6SJ7*	1.65	12BA6*	1.00	35L6GT*	1.00
1B59	12.95	2J37	12.80	6AK6*	2.00	6SK7GT*	1.50	12BA7*	2.40	35W4*	1.25
1B60	64.95	2J38	9.95	6AL5	2.00	6SL7GT*	1.25	12BD6*	2.00	35X4	.90
1B62	1.39	2J39	19.95	6AL5W*	1.50	6SN7GT*	1.25	12BE6*	2.00	35Z3	.90
1C6	.89	2J40	24.50	6AL7GT*	2.65	6SN7WGT*	2.00	12BF6	1.85	35Z4GT	.90
1C7G	.98	2J45	15.70	6AN5*	6.00	6SQ7GT*	1.50	12BH7*	2.40	35Z5GT*	1.50
1C8G	.98	2J48	18.50	6AQ5*	2.00	6SR7*	1.50	12C8	2.80	REL36/434	.90
1D7G	.98	2J50	27.50	6AQ6	.89	6SS7	.98	12F5	.90	36	.69
1D8GT	.98	2J55	89.25	6AQ7GT	1.25	6ST7	1.33	12H6G	1.50	37	.69
1E5GP	.98	2J56	349.50	6AR5*	3.50	6SU7GTY	2.37	12J5GT*	1.50	38	.69
1E7G	.98	2J62	49.45	6AR8	1.98	6SV7	1.45	12J7GT	1.00	39/44	.69
1F4	.79	2K25	24.95	6AS5*	2.00	6SZ7	1.05	12K7GT	.98	CRC40	.54
1F5G	.98	2K28/mtd	36.98	6AS6	1.00	6T7G	1.50	12K8	1.90	41	.79
1F6	.98	2K29	45.75	6AT6*	1.75	6T8	1.39	12Q7GT	.98	42	.69
1F7G	.98	2K39	89.50	6AT6*	1.50	6U4GT*	1.25	12S8GT	.98	43	.85
1G4GT	.98	2V3G	1.29	6AU5GT*	2.65	6U5/6G8*	1.05	12SA7GT*	1.05	45S/VT52	.22
1G5GT	.98	2W4GT	.98	6AU6*	2.65	6U6GT*	1.95	12SC7GT	.98	45Z5	.90
1G6GT	1.19	2X2	.89	6AV5GT*	2.65	6U7G	.98	12SF5GT	.79	45Z5	.90
1H4G	.98	2X2A	1.49	6AV6*	1.50	6V6GT*	2.25	12SF7GT	.79	46	.99
1H5G	.87	3A4	1.49	6AW6*	2.65	6V6GTY*	2.45	12SG7	.98	47	.69
1H6G	.98	3A5	1.25	6AX5GT*	1.35	6V6GTY*	2.45	12SH7	1.10	RK48A	14.85
1J5G	1.20	3A8GT	1.90	6B4G	1.84	6V7G	1.15	12SJ7GT	.89	48	3.90
1J6G	.98	3B4	2.69	6B6G	.98	6W4GT*	1.00	12SK7*	.98	49	.99
1L4	.98	3B5	.89	6B8	1.39	6W4WGT*	2.50	12SL7GT	1.07	50	1.95
1LA4	1.33	3B7/1291	.99	6B8G	1.39	6W5GT	.98	12SN7GT*	2.20	EF50	.69
1LA6	1.33	3B22	2.45	6BA4	1.98	6W6*	2.00	12SQ7GT*	1.50	50A5	1.35
1LB4	1.33	3B24	2.45	6BA6	1.98	6W7G	1.50	12SR7*	1.50	50B5*	1.00
1LC5	1.33	3B28	4.50	6BA6*	1.80	6X4*	1.50	12X2	.98	50C5	1.00
1LC6	1.33	3B27	1.95	6BA7*	1.20	6X5GT*	1.50	12Z3	.98	50C5*	1.00
1LD5	1.33	3B28	2.45	6BC5*	1.85	6X8*	1.29	14A7/12DT	1.48	50L6GT*	1.00
1LD8	1.33	3C4 XXB	1.60	6BD6*	2.00	6Y6G*	1.25	14A7/12DT	1.48	50X6	1.10
1LG5	1.41	3C23	5.85	6BE6*	2.00	6Y7G	.98	14AV7		50Y6GT	.99
1LH4	1.33	3C31/C1B	3.45	6BF6*	1.49	6Z5/12Z5	1.18	XXD	1.18	50Y7GT	.99
1LN5	.98	3C45	12.65	6BG6G*	2.25	6Z7G	.98	14B6	1.08	52	.79
1N5GT	.98	3D6/1299	.69	6BH6*	2.00	6Z7SG	.98	14B8	1.10	53	.79
1N6G*	.98	3D21A	1.98	6BJ6*	2.00	7A4 XXL*	.98	14C8	1.10	53	1.33
1P5GT	.98	3E29	12.50	6BK7*	2.30	7A5*	1.10	14C7	1.29	55	.89
1P24	2.39	3LF4	1.33	6C4*	1.45	7A6*	.90	14E6	1.10	57	.89
1Q5GT	.98	3Q5	.98	6C5GT	.83	7A7*	1.42	14E7	1.33	58	.89
1S4	69.50	3Q5GT	1.19	6C6	1.26	7AD7*	2.39	14F5*	1.33	RK65	24.95
1R4/1294	.98	3S4	.99	6C7	1.26	7AD7*	2.39	14F8*	1.33	70A	2.75
1R5	1.06	3V4	.99	6C8G	.98	7AF7*	.98	14H7*	1.20	HY69	2.75
1S4	1.20	4B27	.99	6CB6*	24.70	7AG7*	1.15	14J7	1.33	70A3	1.49
1S5	1.06	4C33	89.00	6CD6*	2.00	7AH7*	1.16	14N7	1.33	70L7GT	1.95
1S21/S1A	8.95	4C35	34.90	6CD4G*	6.00	7B4*	1.80	14Q7	1.10	71	1.00
1T4	1.05	4C36	15.98	6D6	.89	7B5*	1.80	14R7	1.33	72	.98
1T5GT	1.06	4D21A	1.98	6D8G	.98	7B6*	1.80	14S7	1.33	RK72	1.97
1U4/5910	.98	4E27/267	12.45	6D8	.98	7B7	.90	14W7	1.33	73	1.67
1U5	.98	4J31	95.00	6E5	1.10	7B8	.98	14X7	1.33	NR74	.29
1V	.98	4J32/700	1.98	6E6	1.10	7C5/1248A	1.49	14Y4	1.20	75	.83
1V2	.70	4J47	260.00	6E7	1.39	7C5*	.89	15	.98	76	.83
1X2*	2.45	4J52	280.00	6F5	.83	7C6*	1.42	15E	1.17	77	.83
1Z3*	3.98	4T4/3	5.95	6F6*	1.04	7C7	.98	FG17	2.75	78	.83

RK18	.90	7F7	.89	722A/707A	2.75	5670	5.98	1B9048GE	3.49
15	.90	7F8	1.19	723A	4.95	5686	4.33	8B9483	3.98
19	.69	8I	1.95	723A/B	14.98	5687		Ballast	
19BG6G*	6.00	FG81A	3.75	724A/B	2.89	5691	2.99	1P1	.49
19J6*	3.20	8Q	1.29	725A	6.39	UX6453	1.49	PM3	.98
19T8*	2.90	8V	1.39	726A	7.98	6012	1.25	PM4	.98
20	1.17	8X	1.29	726C	99.98	6013	8.75	4A1	1.39
RK20A	1.50	8Y	1.39	730A	9.89	6080	1.25	PM5	.98
RX21	2.50	84/6Z4	.98	801A	2.9	9001	1.98	6-11	.49
FJ22/CE1C	1.49	85	1.10	802	4.39	9002	1.48	PM6	.98
22	.79	89	.98	803	6.39	9003	1.79	PM7	.98
24	.89	VR92	.25	804	8.45	9004	1.79	PM8	.98
24A	1.10	100TH	8.49	805	3.59	9005/KC4B	1.98	9-3	.49
24G	1.49	FG105	17.50	807	2.25	9006	.27	10-4	.49
24GT	1.49	FG108	8.50	808	2.49			20-4	.49
25A6	1.29	VU111	.45	809	2.45	Sub-Miniature		20-A	.49
25A7	1.27	HY114B	.79	810	11.94	2E35	1.39	K48A	.98
25AC8GT	1.33	HY118/148	.75	811	2.98	2E36	1.49	K56A	.98
25B5	1.39	117L7*	1.98	812	7.80	2E45	1.49	M35B	.36
25B6	2.49	117N7GT	1.98	813	11.75	2E46	1.39	LA2A	.49
25B8GGT*	3.20	117P7GT	1.98	815	1.57	2E48	1.49	K20B	.98
25C6	1.18	117Z3	.79	826	.39	CK501AX	1.26	WL12A	2.41
25L6GT	.87	117Z4GT	1.48	SD828	.98	CK505AX	1.79	C27A	2.45
25Z5	1.00	117Z6GT	1.49	829	7.50	CK509AX	1.26	DR841	5.95
25W4GT*	2.00	117Z7GT	1.49	829B	12.50	CK512AX	1.79	876	.29
25Y5	1.45	F127A	15.89	832	7.98	CK522AX	1.79	Manda Pilots	
27	.87	CV148	4.98	832A	10.44	CK525AX	1.79	44, Box 10	.98
28A7GT*	1.58	150T	14.50	833A	33.50	CK526AX	1.98	45, Box 10	.98
28	.79	155	.98	836	1.98	CK527AX	1.98	55, Box 10	.98
28	.75	FG166	49.00	837	1.35	CK531DX	1.98	64, Ea.	.67
FG27A	8.70	152B	1.98	838	1.39	CK532DX	1.98	90, VT4/3W	.98
RK28A	3.85	FG190	12.50	842	2.78	CK533AX	1.98	100W/20V	.98
28D7	.39	205B/VT2	1.49	843	.99	CK534AX	.89	291, Box 10	.98
30*	.89	CK306	3.15	845	8.95	CK536AX	.89	311/28V	.98
HY31Z	2.75	211/VT4C	.45	851	29.95	CK538AX	.89	312/28V	.98
31	.59	RK215	9.95	860	5.70	CK539DX	.89	323/3V	.25
32	.59	WE215A	.15	861	10.50	CK542DX	.98	Sylvania	
32L7GT	1.49	227A	2.45	866	1.25	CK543DX	.98	5Z4/6W/120V	.15
FG32	5.98	231	1.20	865	1.39	CK544DX	1.39	Watchs	
32L7GT	1.49	249C	1.98	866A	1.10	CK5678	2.48	C7/7W	
FG33	8.90	249G	1.98	872	28.00	CK5702	2.98	20V	.99
34	1.60	250TH	18.75	872A	2.25	CK5703	2.98	MedScrew Base	
34	1.60	262B	8.49	GE872A	2.95	CK5704	2.98	15W/125V	.98
35A5	1.00	304TH	10.98	878	1.95	CK5744	2.98	25W/125V	.98
35B5*	1.00	304TL	10.98	878	1.95	CK5784	1.98	Neon Bulbs	
35C5*	1.00	307A/RK75	6.45	884/6Q6G	1.45	5829	5.95	NE16/991	.25
35L6GT*	1.00	310A	6.98	885	1.39	5875	5.98	NE30	.10
35L6GT*	1.00	313A	1.98	889	399.00			NE32	.15
35W4*	1.25	327A	2.50	920	2.70	C'Ray Tubes		NE45/W	.27
35X4	.90	350A	2.79	922	.98	2AP1	4.88	NE51/NX30	.16
35Z3	.90	371A	1.75	923	1.75	2AH4	4.95	2AH4Miniamps	
35Z4GT	.90	355A	14.15	927/CE25	1.00	3AP1	2.49	6/12/24/48/	
35Z5GT*	1.50	371B	.98	929	1.33	3BP1	2.49	55V Ea.	.15
36	.90	388A	.98	930	.87	3BP1A	14.50	Xtal Diodes/Ea	
37	.69	388A	1.49	931A	4.98	3CP1-S1	2.29	1N21	.49
38	.69	393A	3.75	956	.49	AJP12	2.00	1N21A	2.00
39/44	.69	394A	3.98	958	.49	AJP12-S2	2.00	1N21B	2.49
41	.79	396A	14.98	958	.39	3EP1	2.45	1N22	2.00
42	.69	446A/2C40	1.19	991	.25	3FP7	1.60	1N23	.49
43	.85	446B	1.75	FM1800	1.50	3HP14	14.98	1N23A	2.98
45S/VT52	.22	450TH	37.95	1000T	.98	4AP1	5.49	1N23B	2.75
45Z5	.90	450TL	44.25	CK1005	.49	AJP12	19.95	1N24	5.20
45Z5	.90	GL451	.89	CK1006	.44	4AP10	4.39	1N27	1.50
46	.99	460		CK1007	.49	4BP1	2.25	1N32	18.00
47	.69	RK48A	14.85	CK1008	.98	5BP1	2.25	1N34	.75
50	1.95	HF200	15.95	CK1009	3.98	5CP1	2.49	1N35	1.95
EF50	.69	WL468	5.89	CK1090	4.50	5DP1	4.50	1N38	.79
50A5	1.35	WL831	13.75	HY1231Z	5.39	5FP1	14.98	1N48	.79
50B5*	1.00	WL832A	3.89	HY1269	5.39	5FP14	18.98	1N51	.79
50C5	1.00	GL534	1.49	1613	1.98	5HP1	4.50	1N52	.79
50C5*	1.00	1531	3.89	1613/6F6X	1.06	5HP4	9.75	1N53	.98
50L6GT*	1.00	5441	6.98	1614	1.75	AJP2	4.50	1N63	.98
50X6	1.10	GL546	4.49	1616	1.75	5LP1	11.89	Thermistors sq	
50Y6GT	.99	550P1	19.95	1619	.29	5MP1	4.75	D167010 Vol	
50Y7GT	.99	575A/975	12.65	1620	4.98	5NP1	3.98	Limiter	2.95
52	.79	601B	1.98	1624	1.75	5PP1	5.95	D168291 Ther-	
53	.79	HY615	.18	1626	1.05	7BP7	6.65	mal Comp	81.
53	1.33	WL419	18.98	1625	.49	7CP1	12.95	DP1704A HF	
55	.89	WL531A	3.89	1629	.49	7DP1	14.98	Pwr Meas.	.99
57	.89	701A	2.98	1629	.99	7GP7	14.89	IC Bulb Time	
58	.89	702A/702B	2.65	1631	.80	9JP1	6.45	Delay	.99
65	1.79	703A	1.98	1632	.75	10BP1	9.75	Varistors	
RK65	24.95	704A	1.05	1633	.75	10BP4	19.49	CW20299	
70A	2.75	705A/6021	.65	1634	1.49	10FP4	24.50	USN MSC 2.95	
70A3	1.49	707A	12.50	1635	1.49	12DP7	12.98	WEco 41A 1.50	
70L7GT	1.95	707B	24.00	1636	1.49	12GP1	29.98	Xtal Freq Stds	
71	1.00	710A/6011	.79	2050	1.98	12JP4	47.00	100Kc	7.98
72	.98	712A	1.00	2051	.89	12KP4	47.00	200Kc	7.98
RK72	1.97	715A	1.00	RK5400	36.00	12LP4	54.00	1000Kc	4.49
73	1.67	715B	7.98	5514	4.85	905	2.45	1000Kc	6.49
NR74	.29	715C	22.98	5516	6.70	910/3AP1	4.63	4200Kc	9.98
75	.83	716A	2.75	5517		911	4.45	5000Kc	9.98
76	.83	717A	.61	CR1013	1.49	914A	45.00	6000Kc	9.98
77	.83	720CY	45.00	5618	3.29	Tungar Bulbs		HtrOvenXtals	
78	.83	721A	2.19	5654	9.98	20X/672	2.95	5410/5825/5865	
								Ea. EA	14.98
								Tubes Gtd Exc	
								Open Fil &	
								B'kage Via	
								R'Exp Only.	
								Min Tube	
								Order $5.00	

HIGH CURRENT MICA CNDSRS

Cylindrical, Similar Type "G"

MFD.	KV	AMPS	MC	Each
.04	1	40	1	$6.98
.09	1.5	25	1	11.95
.02	3	22	1	12.95
.02	5	22	1	13.98
.0045	5	7	1	6.98
.005	5	20	3	6.49
.01	5	20	3	6.49
.0011	6	3	3	3.98
.0015	6	3	3	4.29
.0022	6	3	3	4.49
.0033	6	3	3	4.69
.0044	6	3	3	4.98
.0045	6	3	3	5.49
.0047	6	3	3	4.98
.005	6	8.5	3	5.49
.005	8	20	3	7.29
.0051	10	4	3	4.98
.0033	10	6	3	5.29
.0044	10	8.5	3	5.49
.005	10	20	3	21.95
.0015	10	14.5	3	7.49
.02	10	40	1	39.95
.0005	20	4	3	4.98
.00047	20	6	3	5.49
.0015	20	6	3	5.49
.00175	20	12	3	6.49
.0044	20	12	3	8.98
.01	20	40	3	24.95
.0085	25	13	3	27.50

25000VDC CNDSR. .012 MFD C-D 17.95
BT14, 15" long, NEW 24.98

115/V60 cyc Input Xformers

1400vct/90ma, 6.3V/4A, 5v/3aH'sld $4.98
1000vct/150ma, 200v Bias, 6.3v/5a, 5v/2a, 2x6.3v/.65ma, 5v/1.25a, H'sld..$6.98
900v/38ma, 2x2.5v/2a, Xcel't, 1800 V'Dblr, Two 2x2 fil wndgs, H'sld Hvins. 2.98
700vct/100ma, 115v/100ma, 2x6.3v/1a, 5v/2a, Cnd HiVlns 2.98
570v/150ma, 5v3a, 12v/4a 3.29
480vct/80ma, 6.3vct/4a, 5v/2a 1.89
420vct/90ma, 6.3v/1.9a, w/Inpts &
13-24-115vdc & 115/230vac 1.98; 2/3.40

Plate Transformers

7500V or 15000V'Dblr/35ma $8.95
3000v/10ma, Cnd H8Vinsul 4.50
1800v/4ma, H'sld, HiVins 3.29
490-355vct/325ma CndHiVins 4.49

Filament Transformers

5v/115a $12.98; 5v/20a 8.98
2x3V/12.4ma Wndg/12.5KVins 6.98
6.3vct/4A (gud6.5A) H'SldHiVins.. 1.00
6.3vct/2A $1.39; 6.3v/.6A 1.39

Constant Voltage Regulators

380 Watts GEN ELEC Inpt 115-230V/60 cyc; Outpt 115V/380 Watts $38.95
500 Watts RAYTHEON Inpt 198-248V/50-60 cyc; Outpt 230V/500W/.05%FV ½% $38.00
750 Watts GEN ELEC Inpt 95-130V/50-60 cyc; Outpt 113-118-117V/.78KVA/.8PF $65.00
2000 Watts SOLA Inpt 95-190V/50-60 cyc; Outpt 115V/2KW/17.4A/1%, Like New $150.00
Same New $300 US cost. Your Cost $162.00
Powerstat 810VA 230V/50-60 cyc, 1ph Inpt Bench or Wall mtg. Oper 115V UnCnd 11 lbs. No. 216 U. New $19.95

400 Cyc/115V Inpt Xformers

FREED 5500vct, 30 lbs. Cnd $12.98
FREED 2.5VCT/10A Cnd 4.95

"WILLIAMSON" 10W HI-FI KIT

10cyc To 30Kc with Ease! Internationally Famous. To 1Mc. for Experimenters. Incl Pwr Supply. RCA Chassis, Less Pre-Amp & Output Xfmr $20.95; W'mson Pre-Amp Kit & Tone Boost Amplifier $34.95
"W'mson" 25 page Booklet .50c
Super-Wide-Range Hi-Fi Kit: 20 cyc to 20Kc. 10W. Max Harmonic Distortion 1 ⅝% @ Full Output; 0.5%/5W output. PreAmp, Tone Control, RCA chassis, Less Output Xfmr $34.95
G-E VarReluctCartridge, FarmNeedle $1.88
G-E Var Relue Cartridge RPX 050 $7.49
G-E Var Reluc Cart. RPX049 or 041 $8.49
G-E Spkr S1201D $16.49
SENSATIONAL 10" Hi-Fi Spkr Ideal 6 Watt Home Stge. Concentric Separately Driven TWeeter 20 to 16000cps $18.95

WEco 1233vct/350Ma, 1146vct/70Ma 6.98
WEco 780V/200Ma, 210V/15Ma, 5V/2A 4.95
G-E 6.3V/7A, 6.7A/3A, 6.3V/.3A.. 2.98
WEco 6.3V/4.65A, 6.3V/.3A 2.49
WEco 6.3V/3A, 5V/2A 2.49
WEco 6.3V/1A..$1.95; 6.3V/.6A.. 1.49
FREED 5V/10..$4.95; WEco 5V/4A 2.98
FREED 2.5VCT/10A Cnd 4.95

Similar 12" Hi-Fi Spkr. 15 Watt, 30 to 17000cps $30.98

Infrared Snooperscope

Image-Converter Tube Hi-Sensitivity simplified design 2" dia. data & tube $4.98; 2 for $8.48

BLOWERS—Cool That Tube!

40 CFM 28vacdc $4.98
70 CFM 115v/400cy 4.49
210 CFM 28vacdc 8.98
250 CFM 7 28 to 115vac Transfur.. 11.98
100 CFM 115vacdc 7.98
180 CFM 115vacdc 10.98
175 CFM 220vac 11.98

Hi-Volt Oil Capacitors

Mfd	Each	Mfd	Each
	1000 wvdc		7500 wvdc
.1	2.19	.02	2.39
.5	2.69	.05	2.49
1	4.29	.05	2.49
2	5.95	1	13.98
	4000 wvdc		
.2	7.98		10000 wvdc
	5000 wvdc	.03	2.69
.2	3.29		12500 wvdc
2	9.98	.05	14.98
4	17.98		15000 wvdc
	7000 wvdc	.0016	8.98
.002	$1.2		25000 wvdc
.0075	1.49	.00025	6.49
.1	3.89	1	$98.00

Money Back Guarantee (Cost of Notice Only!)
$3 Min. Order FOB NYC. Add Shpg. Charges & 25% Dep. Tube Only. Gtd vis R'Exp. Only. Prices Subject to Change Without Notice. Phone: WORth 2-7230.

THAT'S A BUY — TAB — THAT'S A BUY

DEPT. 18 SIX CHURCH ST. NEW YORK 6, N.Y., U.S.A. — CORNER CHURCH & LIBERTY STS. ROOM 200

INDEX TO ADVERTISERS

Accurate Paper Tube Co. 229
Ace Engineering & Machinery Co., Inc. 258
Acme Electronics 255
Adams & Westlake Company 6
Aeronautical Communications Equipment, Inc. 138
Aircraft Radio Corporation 36
Alden Products Co. 239
Allen-Bradley Co. 34
Allen Co., Inc., L. B. 206
Allied Control Company, Inc. 48
Allied Radio Corp. 250
Allmetal Screw Products Company, Inc. 250
Almo Radio Company 218
Alpha Nuclear Laboratories 218
American Chronoscope Corporation 250
American Gas Accumulator Company 216
American Lava Corp. 37
American Phenolic Corporation 140
American Television 158
American Television and Radio Co. 248
American Time Products, Inc. 151
Ampex Electric Corporation 253
Andrew Corporation 178
Arma Corporation 189
Arnold Engineering Company 191
Art Wire & Stamping Company 229
Astron Corporation 221
Audio Devices, Inc. 131
Automatic Electric Sales Corp. 187

Ballantine Laboratories, Inc. 148
Barry Corporation 48
Bead Chain Manufacturing Co. 188
Beaver Gear Works, Inc. 194
Belden Manufacturing Co. 44
Bell Telephone Laboratories 181
Bendix Aviation Corporation Eclipse-Pioneer Division 190
Bentley, Harris Manufacturing Co. 145
Berkeley Scientific Company 227
Bird & Co., Inc., Richard H. 257
Bird Electronic Corp. 253
Birtcher Corporation 245
Birwax Corporation 254
Bliley Electric Company 206
Boonton Radio Corporation 125
Borg Corporation, George W. 262, 263
Bowser, Inc. 229
Bradley Laboratories, Inc. 43
Breeze Corporations, Inc. 243
Bridgeport Brass Co. 177
Browning Laboratories, Inc. 195
Burgess Battery Company 239
Burlington Instrument Co. 220
Burnell and Company 35

C.G.S. Laboratories, Inc. 211
Cambridge Thermionic Corp. 260
Cannon Electric Development Co. 184
Capitol Radio Engineering Institute 257
Carboloy Company 54, 55
Carborundum Company 208
Carter Motor Co. 247
Centralab, Div. Globe-Union Inc. 13, 14, 15
Chicago Transformer, Div. of Essex Wire Corp. 163
Cinch Manufacturing Corp. 117
Cleveland Container Company 137
Cohn Corporation, Sigmund 222
Communications Accessories Company 240
Condenser Products Company 7
Cornell-Dubilier Electric Corp. 175
Corning Glass Works 8, 9
Cosa Corporation 193
Coto-Coil Co., Inc. 246
Cross Co., H. 260

Dano Electric Company 218
Daven Co. Third Cover
De Jur-Amsco Corporation 256
Dial Light Company of America 142
Distillation Products Industries 153
Donnelly Mfg. A Div. of John Donnelly & Sons 219
Dow Corning Corporation 266
Driver-Harris Company 20
Dumont Electric Corporation 211
DuMont Laboratories, Inc., Allen B. 33, 195
Durant Mfg. Co. 225
Dynamic Resistor Corporation 194

Eastman Kodak Company, Industrial Optical Sales Div. 159
Edin Company, Inc. 217
Edo Corporation 173
Eitel McCullough, Inc. 57
Eisler Engineering Company, Inc. 214, 266
Electrical Industries, Inc. 211
Electrical Reactance Corp. 133
El-Tronics, Inc. 246
Electronic Associates Inc. 230
Electronic Instrument Co., Inc. 141
Electronic Measurement Company 209
Electronic Tube Corporation 172
Electro Motive Mfg. Co., Inc. 167
Enthoven & Sons Ltd., H. J. 180
Erie Resistor Corporation 29

Fairchild Recording Equipment Corporation 225
Falstrom Company 240
Filtron Co., Inc., The 19
Fisher-Pierce Company, Inc. 243
Ford Instrument Company 264

Gamewell Company 222
Gates Radio Company 254
General Electric Company
Apparatus Dept. 30, 31, 147, 190
Chemical Dept. 171
Electronics Dept. 27, 30, 47, 157
General Radio Company 127
Glaser Lead Co., Inc. 204
G-M Laboratories, Inc. 239
Gramer Transformer Corp. 22
Graphite Metallizing Corp. 231
Green Instrument Co. 241
Guardian Electric Mfg. Co. 139

Hathaway Instrument Co. 174
Haydon Company, A. W. 231
Haydon Mfg. Company, Inc. 212, 213
Heath Company, The 183
Helland Research Corporation 243
Heldor Metal Products Corp. 263
Helipot Corporation 143
Hermetic Seal Products Company 216
Hewlett-Packard Company 33
Hudson Wire Company 257

Industrial Condenser Corp. 218
Instrument Electronics Corp. 249
Instrument Resistors Company 241
International Nickel Company, Inc. 28
International Resistance Co. 4, 5
Irvington Varnish & Insulator Company. 18

J F D Manufacturing Co., Inc. 247
Jelliff Manufacturing Corporation, C. O. 239
Jersey Specialty Co. 251
Johnson Co., E. F. 31
Jones Div. Howard B. Cinch Mfg. Corp. 241
Joy Manufacturing Company 214

Kahle Engineering Co. 254
Karp Metal Products Co., Inc. 11
Kartron 260
Kenyon Transformer Company, Inc. 237
Kester Solder Company 121
Knights Co., James 222

Lambda Electronics Corporation 254
LaPointe-Plascomold Corporation 197
Leach Relay Co. 176
Leeds & Northrup Co. 163
Lewis Engineering Co. 216
Lewis Spring & Manufacturing Co. 142
Liberty Mirror Division, Libby-Owens-Ford Glass Co. 221
Lockheed Aircraft Corporation 259
Lojack Precision Corporation 244
Lord Manufacturing Company 266

Magnecord, Inc. 152, 215
Mallory and Company Inc., P. R. 64, 119
Marconi Instruments, Ltd. 247
Marion Electrical Instrument Co. 2
Markem Machine Company 237
MB Manufacturing Company, Inc. 49
McGraw-Hill Book Co. 120
Measurements Corporation 252
Metal Textile Corporation 225
Meyercord Co. 233
Millen Mfg. Co., Inc., James 246
Milo Radio & Electronics Corp. 240
Miniature Precision Bearing Inc 260
Minneapolis-Honeywell Regulator Co. Industrial Division 58
Mitchell-Rand Insulation Co., Inc. 32
Mosinee Paper Mills Company 226
Muckle Manufacturing Co. 249
Muirhead & Co., Ltd. 3
Murex Ltd. 241
Mycalex Tube Socket Corp. 42

National Company, Inc. 227
National Moldite Company 180
National Research Corporation 198
National Varnished Products Corporation, The 12

APPLICATION ENGINEERED "PRECISION" Circuit Tester

20,000 Ohms per Volt

THE SERIES "85"

Compact, laboratory style, high sensitivity test set. "Application Engineered" for production, test, laboratory, school and service-maintenance phases of modern radio-electronics-communications.

20,000 Ohms per Volt D.C.
1000 Ohms per Volt A.C.

VOLTAGE RANGES:	0-3-12-60-300-1200-6000 A.C. & D.C.
CURRENT RANGES:	0-120 microamps 0-1.2-12-120-1200 MA.- 0-12 Amps D.C.
RESISTANCE RANGES:	0-6000-600K Ohms 0-6-60 Megohms.
DECIBEL RANGES:	From—26 to +70 DB.

Complete with batteries and test leads **$39.95**

PLUS superior physical features:

- ★ 4½" wide angle meter
- ★ Heavy duty molded bakelite instrument case, size 5½ x 7½ x 3"
- ★ Heavy gauge, anodized aluminum panel
- ★ Rotary Range and Function Selection
- ★ Recessed 6000 volt safety jacks
- ★ Only two pin jacks for all standard ranges

LC-1 Leather Carrying Case

Custom designed top-grain cowhide case with tool and test lead compartment. **$9.50**

See this and other "Precision" Application Engineered instruments on display at leading radio parts distributors. Write for latest catalog.

Precision Apparatus Co., Inc.
92-27 HORACE HARDING BLVD.
ELMHURST 73, N. Y.

*Reg. U.S. Patent Office

Export: 458 B'way, N.Y.C., U.S.A. Cables: MORHANEX
In Canada: Atlas Radio Corp. Ltd., Toronto, Ontario

INDEX

TO QUALITY

COIL COMPONENTS

Military – Commercial

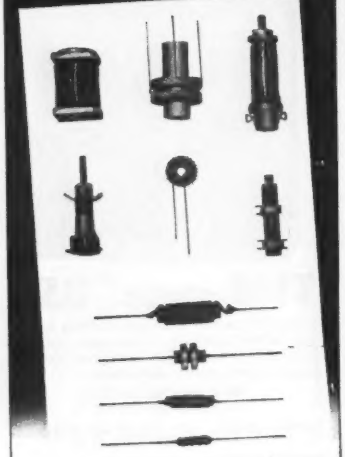

HERMETICALLY SEALED

VACUUM VARNISHED IMPREGNATED

- Bobbins
- Choke Coils
- Oscillator Coils
- Relay Coils
- R.F.—I.F. Coils
- Solenoids
- Toroidal Coils
- Transmitting Coils

Quality Coils At Competitive Prices

Send us your engineering specifications for quotations.

use

united states electronics

CORPORATION

LYNDHURST • NEW JERSEY

Neo-Sil Corporation 38
New York Transformer Co., Inc. 188
Ney Company, J. M. 235
North American Aviation, Inc. 150
North Electric Mfg. Co. 165
Northern Radio Co., Inc. 261
Nothelfer Winding Laboratories 264

Ohmite Manufacturing Co. 16A, 16B
Onan & Sons, Inc., D. W. 257
Oregon Electronics Mfg. Co. 142

Panoramic Radio Products, Inc. 228
Paper Machinery & Research, Inc. 233
Paramount Paper Tube Corp. 251
Permoflux Corp. 166
Pfanstiehl Chemical Company 245
Phalo Plastics Corp. 220
Polarad Electronics Corporation 241
Potter Instrument Co., Inc. 205
Precision Apparatus Co., Inc. 290
Precision Paper Tube Co. 285
Premax Products, Div. Chisholm-Ryder Co., Inc. 259
Presto Recording Corporation 183
Pyramid Electric Co. 59, 60
Pyroferric Co. 186

Radio Corp. of America ..... 207, 236, Back Cover
Radio Receptor Company, Inc. 179
Radio Shack Corp. 285
Railway Express Company, Air Express Division 45
Rauland Corporation 23
Raytheon Manufacturing Co. 129
R-B-M Division Essex Wire Corp. 144
Rek-O-Kut Co., Inc. 243
Remler Company, Ltd. 250
Resistance Products Co. 245
Revere Copper & Brass Inc. 16
Richardson Company 24
Rogan Brothers 150
Rome Cable Corporation 210

Sanborn Company 202
Sarkes Tarzian, Inc. 26
Scientific Electric Div. of "S" Corrugated Quenched Gap Co. 248
Scintilla Magneto Division of Bendix Aviation Corp. 56
Sessions Clock Company, Timer Div. 223
Sigma Instruments, Inc. 63
Simpson Electric Company 51
Societe Industrielle ALFA 266
Sorensen and Company, Inc. 17
Specialty Battery Company 230
Spincraft, Inc. 235
Sprague Electric Company 123
Stackpole Carbon Co. 46
Standard Piezo Company 233
Standard Pressed Steel Co. 206
Standard Transformer Corporation 146
Staver Company, Incorporated 257
Steward Manufacturing Co., D. M. 245
Stoddart Aircraft Radio Co. 185
Struthers-Dunn, Inc. 160
Sun Radio & Electronics Co., Inc. 263
Superior Tube Company 161
Sylvania Electric Products, Inc. 61, 135
Syntron Co. 247

Tech Laboratories 256
Technology Instrument Corp. 234
Tektronix, Inc. 254
Teletronics Laboratory, Inc. 266
Television Equipment Corp. 220
Tenney Engineering, Inc. 170
Tensolite Insulated Wire Co., Inc. 262
Terpening Company, L. H. 224
Thomas & Skinner Steel Products Company 146
Tiffelex, Inc. 214
Transicoil Corporation 235
Transradio, Ltd. 235
Trans World Airlines 146
Triplett Electrical Instrument Co. 10
Tung-Sol Lamp Works, Inc. 209
Turner Company 156

Ucinite Co., The 201
Ungar Electric Tool Co., Inc. 251
Unique Devices, Inc. 259
United Electronics 149
United States Electronics Corporation 300
United Transformer Co. ..... Second Cover
Universal Mfg. Co., Inc. 249
Univerality Loudspeakers Inc. 251

Varflex Corporation 50
Varian Associates 154
Veeder-Root, Inc. 169
Vickers Electric Division Vickers Inc. 49
Victoreen Instrument Company 243

Waldes Kohinoor, Inc. 155
Ward Leonard Electric Company 163
Waterman Products Co., Inc. 200
Waters, Robert A., Inc. 233
Wayne-Kerr Laboratories, Ltd. 237
White Dental Mfg. Company S.S. 232, 233
Whitehead Stamping Company 259
Workshop Associates, Inc. 164

Zetka Television Tubes Inc. 41
Zophar Mills, Inc. 242

PROFESSIONAL SERVICES 267

SEARCHLIGHT SECTION

(Classified Advertising)

EMPLOYMENT

Positions Vacant 268-272
Selling Opportunity Offered 268
Selling Opportunities Wanted 268
Employment Services 268

EQUIPMENT

(Used or Surplus New) For Sale 272-298

WANTED

Equipment 272

ADVERTISERS INDEX

Acorn Electronics Corp. 295
Aircraft Radio Industries, Inc. 296
Alexander, F. 296
Alvaradio Supply Co. 291
American Electrical Sales Co. 272
Arrow Sales Inc. 285
Bendix Aviation Corp., Radio Div. 270
Research Laboratories 269
Blan 294
Boonton Radio Corp. 272
Brooks Co., Inc., B. D. 290
Burden Sales Co. 297
C & H Sales Co. 294
Capehart-Farnsworth Corp. 269
Columbia Electronics, Ltd. 288
Communication Devices Co. 294, 296, 297
Communications Equipment Co. 273, 275
Compass Communications Co. 296
Cottone & Co., A. 292
Electro Impulse Laboratory 284
Electronic Engineering Co. of Calif. 270
Electronic Surplus Brokers 272
Electronic Transformer Co., Inc. 296
Electronicraft, Inc. 283
Embassy Engineering Co. 272
Empire Electronics 297
EPCO 294
Finnegan, H. 272
Franklin Employment Service 268
Franklin Institute, The 270
French-Van Breems, Inc. 293
Goodyear Aircraft Corp. 269
Hallicrafters Co. 268
Hughes Aircraft Co. 268, 270
Instrument Associates 276, 277
Interstate Appliance Co., Inc. 297
Kings County Machinery Exchange 297
Lectronic Research Laboratories 287
Leru Laboratories, Inc. 295
Liberty Electronics, Inc. 290
Life Electronics Sales 292
Maritime International Co. 297
Maritime Switchboard 291
Mate, H. M. 272
Maxson Corp., W. L. 270
Metropolitan Overseas Supply Corp. 297
Mogull Co., Inc., Alexander 293
Monmouth Radio Laboratories 292
National Union Research Div. 271
Norman Radio Distributors, Inc. 288
Opad-Green Co. 288
Photocon Sales 289
Powell, Harold H. 278-279
Precision Electrical Instrument Co. 288
Radio & Electrical Surplus 272
Radio Ham Shack, Inc. 281
Radio Mart 290
Raytheon Mfg. Co. 290
Reliance Merchandizing Co. 280
Sandia Corp. 271
Servo-Tek Products Co., Inc. 282
Standard Radio-Electrical Products 292
Sylvania Electric Products Inc. 268
TAB 296, 297, 298
Telemarine Communications Co. 290
Tomsett Associates 268
Universal General Corp. 272
Victor-Bernard Industries 272
Wells Sales, Inc. 286
Werthrimer & Co. 272
Westinghouse Electric Corp. 268, 271, 272
Weston Laboratories 290
Wilgreen 296

This index is published as a convenience to the readers. Every care is taken to make it accurate, but ELECTRONICS assumes no responsibility for errors or omissions.



Quick Switches



are a

DAVEN SPECIALTY





And the "specialty of the house" is double-barreled . . . first, choose from hundreds of standard units to satisfy your needs—for quick switch delivery . . . second, Daven can effect quick 'switches' or changes from standard units to special switches, by using components at hand. Standard parts can be adapted for *your* switch. That too makes for speed, dependability, economy. Write for more detailed data.



Here's Why Daven Switches Excel

- Low and uniform contact resistance.
- Minimum thermal noise.
- High resistance to leakage.
- Trouble-free operation and long life.
- Roller-type positive detent action.
- Depth of unit not increased by addition of detent.

Standard Daven Switches may be the answer to many of your problems. Therefore, check this list below for many of the popular types that are readily available.

Type	Operation	Maximum No. of Positions (per pole)	Maximum Poles per Deck	Deck
G1A	Make before break	24	1	1 3/8"
C1A	Make before break	31	1	1 3/4"
C2B	Break before make	15	1	1 3/4"
D1A	Make before break	47	4	2 1/4"
D7A	Make before break	14	4	2 1/4"
D8B	Break before make	7	5	2 1/4"
D9A	Make before break	9	2	2 3/4"
E3A	Make before break	47	4	2 3/4"
E8B	Make before break	12	6	2 3/4"
E11A	Make before break	15	1	3"
F1A	Make before break	60		

THE DAVEN CO.

191 CENTRAL AVENUE • NEWARK 4, NEW JERSEY

It's Free!

Your copy of Daven's complete, new bulletin on switches. Write for it today.

Another RCA FIRST!

. . . the RCA-17CP4 metal shell rectangular kinescope

As pioneers in the development of the kinescope, RCA leads again with a new and advanced type of metal-shell *rectangular* kinescope . . . destined to become the industry's leading large-picture tube. The new RCA-17CP4 has a picture area of 14⅜" x 11", and offers designers the following notable advantages . . .

Use of the metal shell not only makes practical a construction which weighs less than a similar all-glass tube, but also makes practical the use of a higher-quality face plate than is commonly used on all-glass tubes.

The rectangular shape, which allows reproduction of the transmitted picture without waste of screen area, permits use of a cabinet having about 20 per cent less height than is required for a round-face tube having the same picture width. In addition, the chassis need not be depressed or cut out under the face of the tube and controls can be located as desired beneath the tube.

The 17CP4 with its design-center maximum anode-voltage rating of 16 kilovolts, provides pictures having high brightness and good uniformity of focus over the whole picture area. It has a high-efficiency, white fluorescent screen on a relatively flat, high-quality faceplate made of frosted Filterglass to prevent reflection of bright objects in the room and to provide increased picture contrast.

Employing magnetic focus and magnetic deflection, the 17CP4 features an improved design of funnel-to-neck section which facilitates centering of the yoke on the neck and, in combination with better centering of the beam inside the neck, contributes to the good uniformity of focus over the entire picture area. The diagonal deflection angle is 70° and the horizontal deflection angle is 66°.

Other features incorporated in the 17CP4 are short overall length and an ion-trap gun which requires only a single-field, external magnet.

RCA Application Engineers are ready to co-operate with you in applying the 17CP4 and associated components to your specific designs. For further information write RCA, Commercial Engineering, Section 42AR, Harrison, N. J.

Another **RCA-developed tube**

Designed for Radiosonde Service, the RCA-5794 employs two resonators integral with the tube. The output resonator is tuned to 1680 Mc by means of an adjusting screw. Useful power output is 500 milliwatts.

The Fountainhead of Modern Tube Development is RCA

RADIO CORPORATION of AMERICA

ELECTRON TUBES **HARRISON, N. J.**